

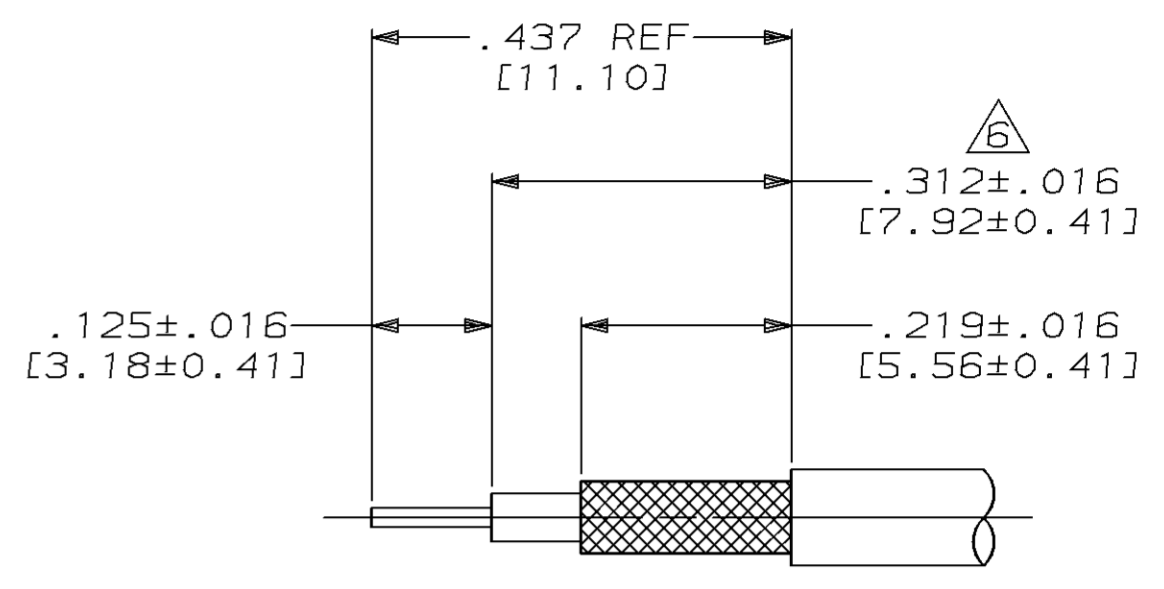


REVISIONS									
PROD CODE	LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
3321	DF	XO				E	REV & REDRAWN; 0600-1969-94 CT	2-95	JD

### ASSEMBLED VIEW

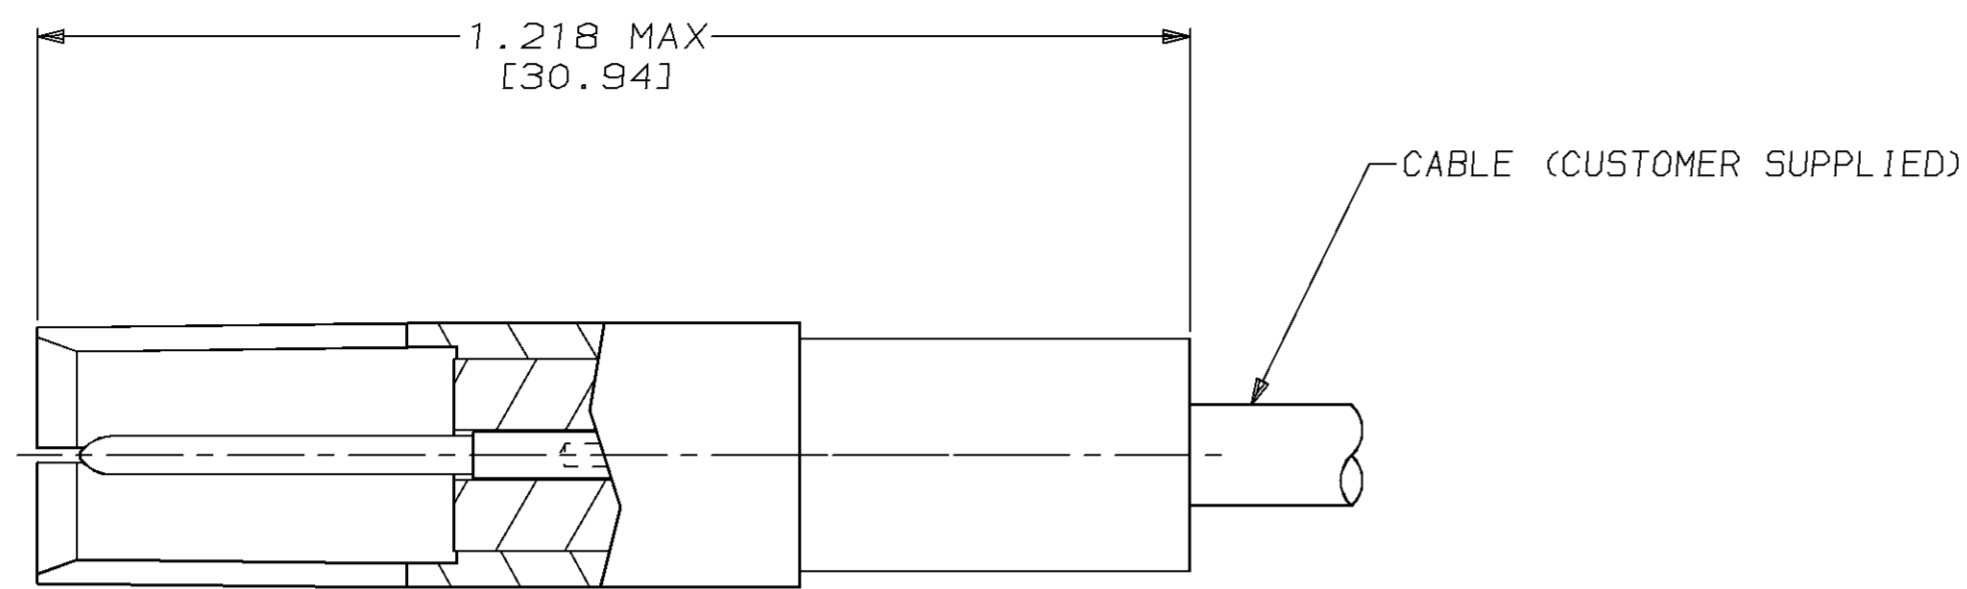

RECOMMENDED STRIP LENGTH  
SCALE: N.T.S.

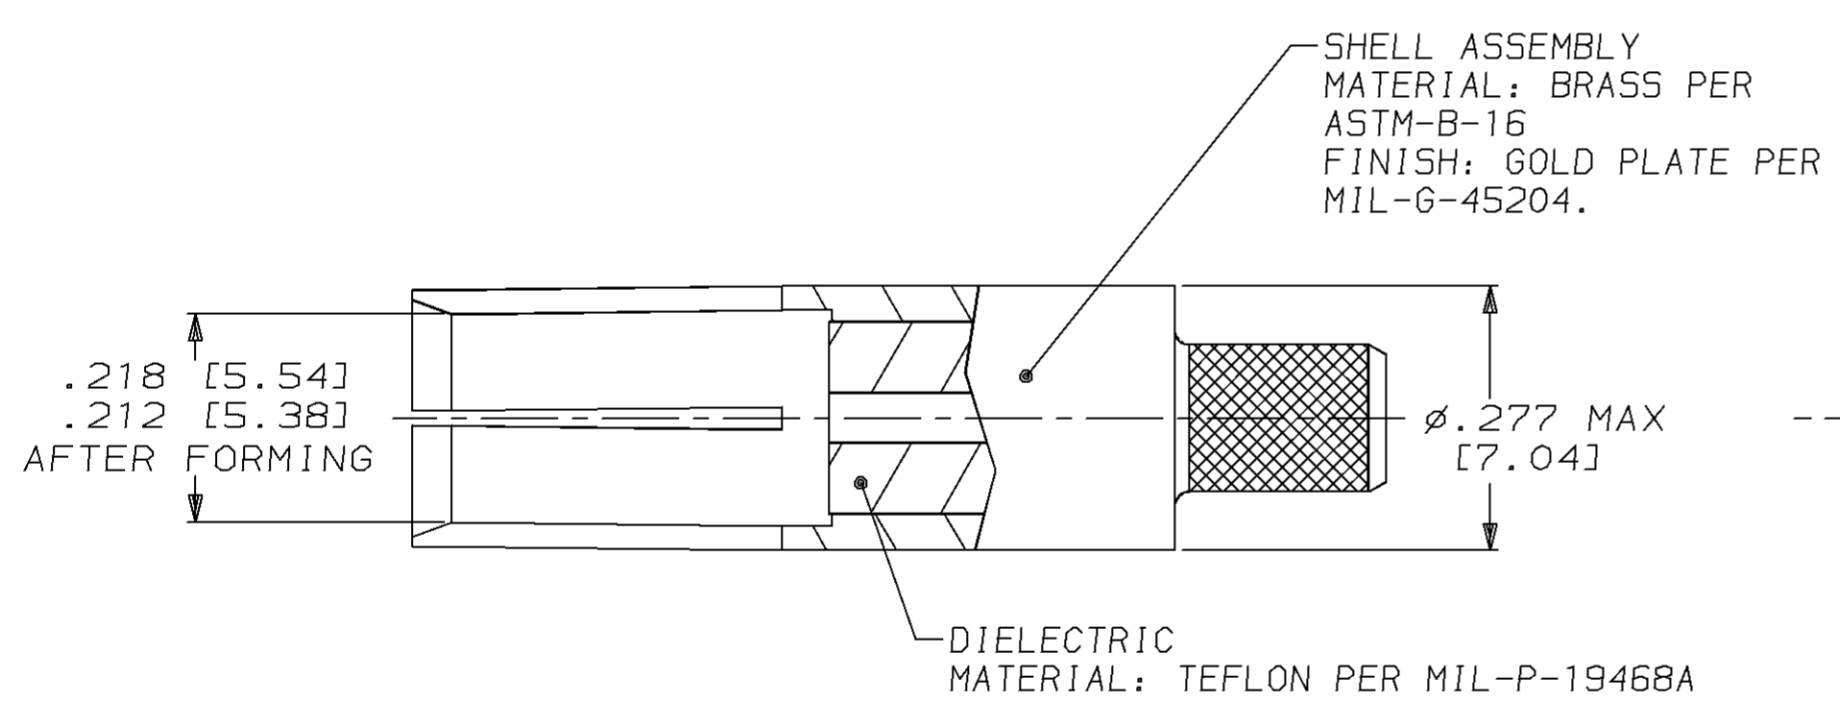

- FOR USE WITH RG-180/U, 180A/U, 180B/U, 195/U & 195A/U COAX CABLE.
  - FERRULE CRIMPING TOOL: AMP TOOL #220066-1 CRIMP B OR #220066-2 CRIMP B.
  - CONTACT CRIMPING TOOL: M22520/2-01 OR AMP TOOL NUMBER 1-601966-6, SETTING NUMBER 5. DANIELS POSITIONER PART NO. K345 OR AMP TOOL NO. 1-601966-6.
  - SEE I.S.2348.
  - DANIELS MANUFACTURING CORP  
2266 FRANKLIN ROAD  
BLOOMFIELD HILLS, MI 48013
- △ OUTER JACKET OF CABLE MUST BE TRIMMED TO ALLOW PROPER INTER-PIN CONTACT LOCATION AFTER FERRULE CRIMP OPERATION.
- PARTS SHIPPED UNASSEMBLED AND CABLE IS SUPPLIED BY CUSTOMER.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm] TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± - ANGLES ± -	DR 2-1-95 C.C. THOMAS	AMP Incorporated Harrisburg, PA 17105-3608	
	CHK 2-2-95 J. DUNBAR		
MATERIAL SEE CALLOUTS	APPD 2-2-95 J. DUNBAR	NAME CONNECTOR, COAXIAL, RF SOCKET SIZE 5, ARINC (HEX CRIMP)	
	APPD 2-2-95 C.C. THOMAS	SIZE C 00779	
FINISH SEE CALLOUTS	PRODUCT SPEC 108-12045	DRAWING NO G=225791-8	
	APPLICATION SPEC -	SCALE 5:1	
WEIGHT -	SHEET 1 OF 1		