



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		R	EC 0G3C 0734 04	23DEC04	BSV	JG
			R1	REVISED PER ECO-09-020689	28AUG09	KK	AEG

D

C

B

A

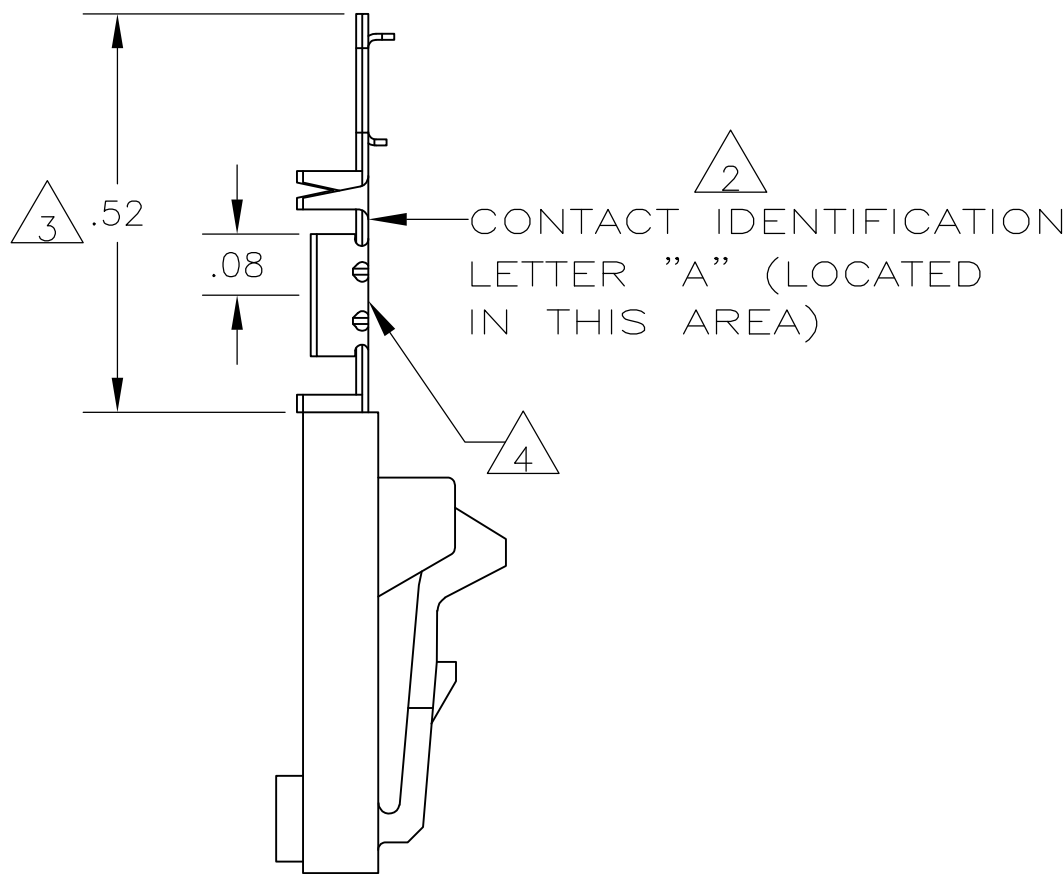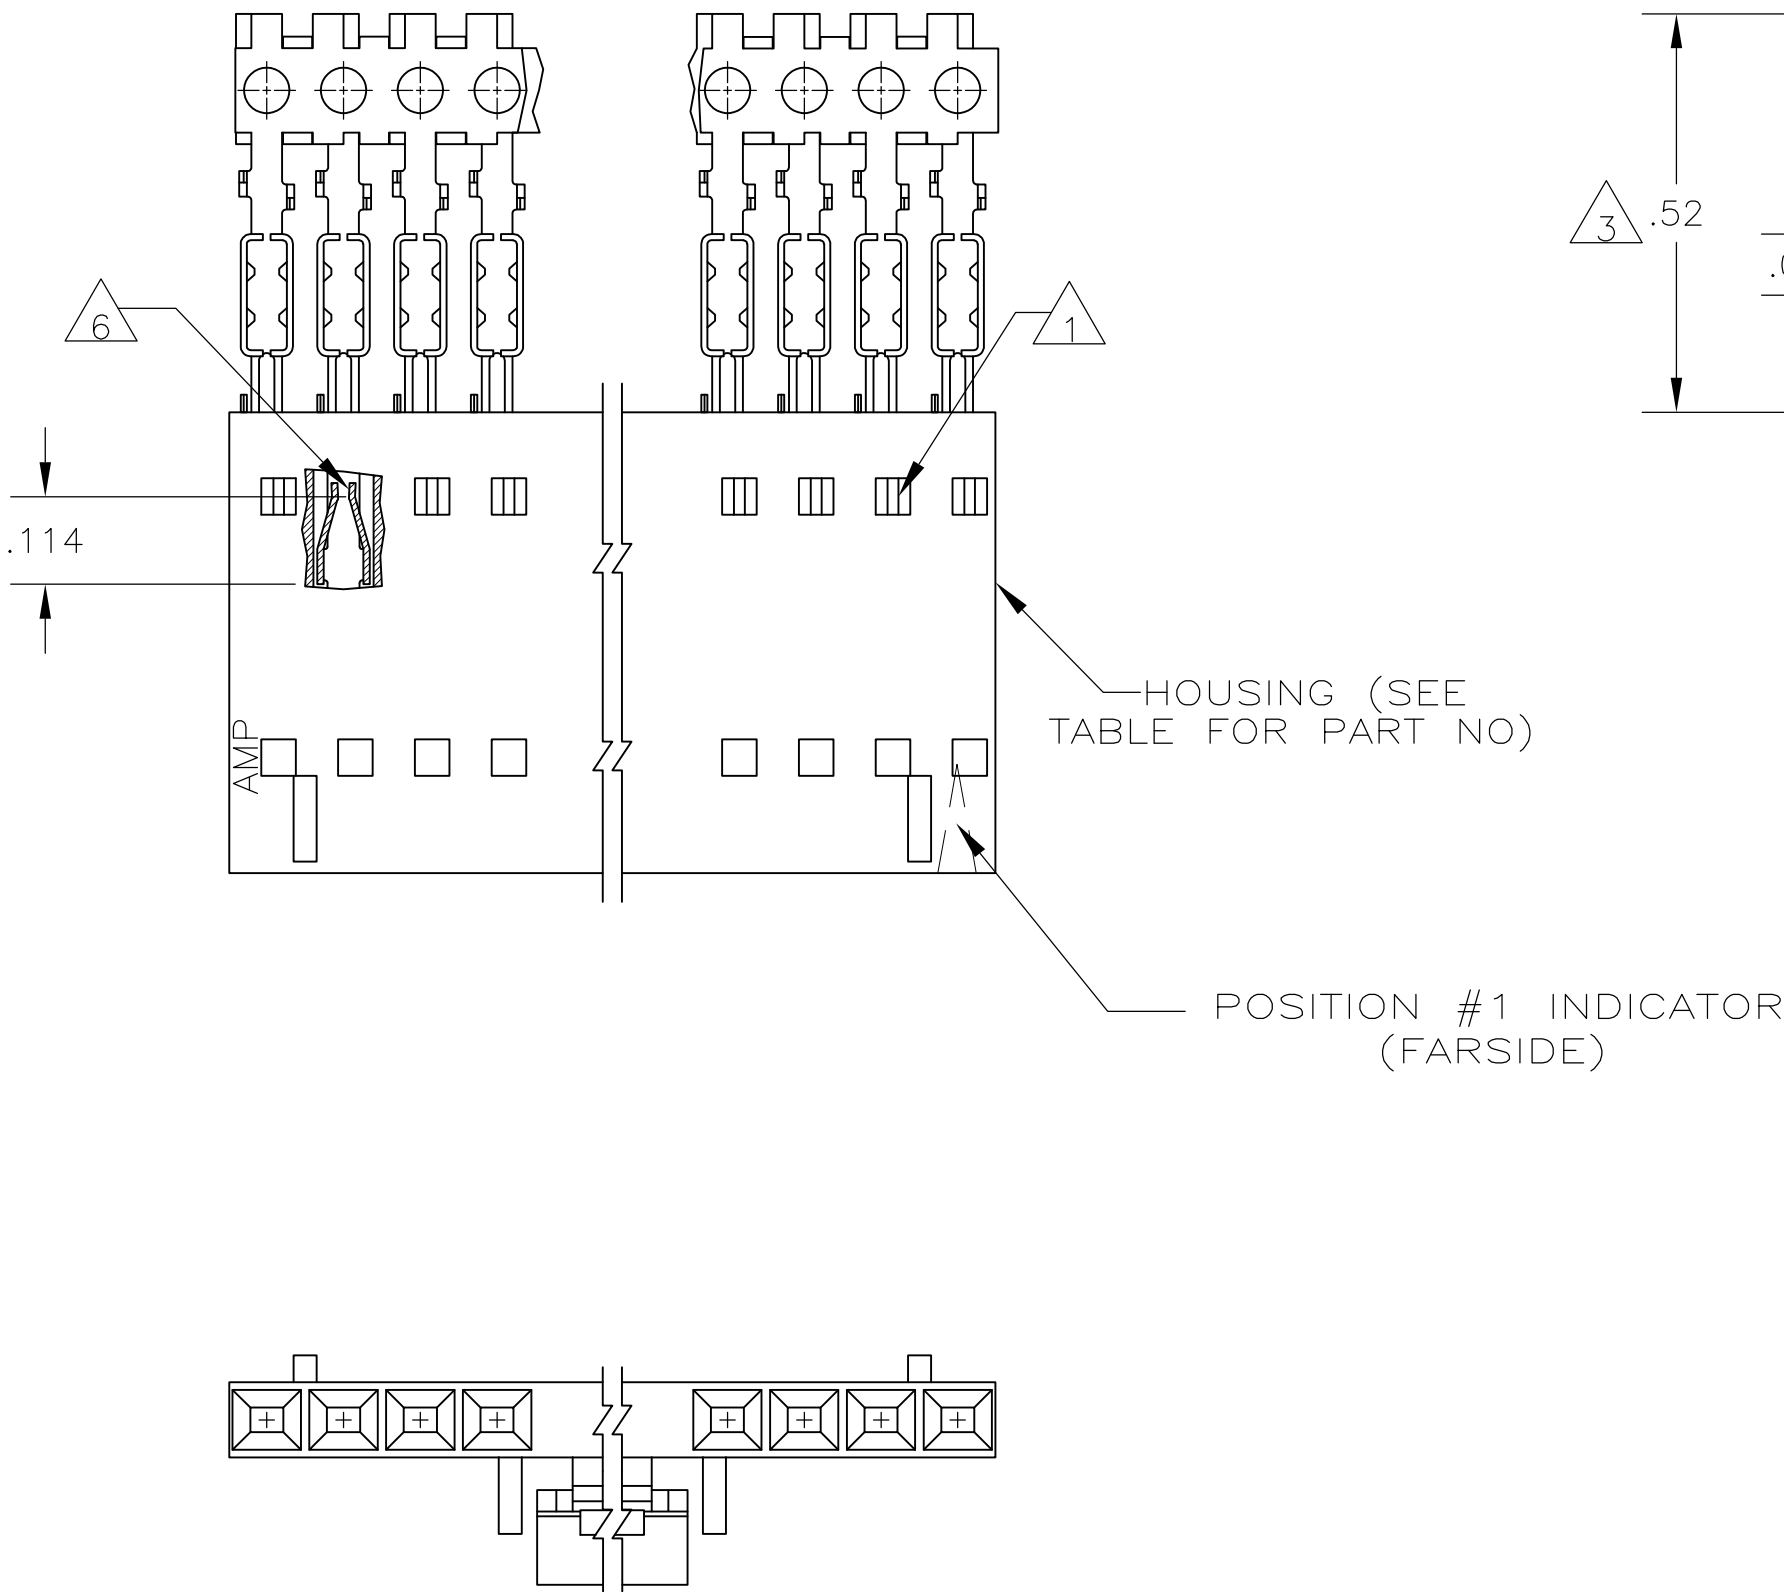

8	2-104257-4	25	9	7-103897-4
8	2-104257-3	24	9	7-103897-3
8	2-104257-2	23	9	7-103897-2
8	2-104257-1	22	9	7-103897-1
8	2-104257-0	21	9	7-103897-0
8	1-104257-9	20	9	6-103897-9
8	1-104257-8	19	9	6-103897-8
8	1-104257-7	18	9	6-103897-7
8	1-104257-6	17	9	6-103897-6
8	1-104257-5	16	9	6-103897-5
8	1-104257-4	15	9	6-103897-4
8	1-104257-3	14	9	6-103897-3
8	1-104257-2	13		6-103897-2
7	2-104257-4	25	9	2-103897-4
7	2-104257-3	24	9	2-103897-3
7	2-104257-2	23	9	2-103897-2
7	2-104257-1	22	9	2-103897-1
7	2-104257-0	21	9	2-103897-0
7	1-104257-9	20	9	1-103897-9
7	1-104257-8	19	9	1-103897-8
7	1-104257-7	18	9	1-103897-7
7	1-104257-6	17	9	1-103897-6
7	1-104257-5	16	9	1-103897-5
7	1-104257-4	15	9	1-103897-4
7	1-104257-3	14	9	1-103897-3
7	1-104257-2	13		1-103897-2
7	1-104257-1	12		1-103897-1
7	1-104257-0	11		1-103897-0
7	104257-9	10		103897-9
7	104257-8	9		103897-8
7	104257-7	8		103897-7
7	104257-6	7		103897-6
7	104257-5	6		103897-5
7	104257-4	5		103897-4
7	104257-3	4		103897-3
7	104257-2	3		103897-2
7	104257-1	2		103897-1

SUPERSEDED BY 1-103961-1	7	1-104257-1	12	1-103897-1
SUPERSEDED BY 1-103961-0	7	1-104257-0	11	1-103897-0
SUPERSEDED BY 103961-9	7	104257-9	10	103897-9
SUPERSEDED BY 103961-8	7	104257-8	9	103897-8
SUPERSEDED BY 103961-7	7	104257-7	8	103897-7
SUPERSEDED BY 103961-6	7	104257-6	7	103897-6
SUPERSEDED BY 103961-5	7	104257-5	6	103897-5
SUPERSEDED BY 103961-4	7	104257-4	5	103897-4
SUPERSEDED BY 103961-3	7	104257-3	4	103897-3
SUPERSEDED BY 103961-2	7	104257-2	3	103897-2
SUPERSEDED BY 103961-1	7	104257-1	2	103897-1

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR STRIP ASSEMBLIES SEE PART NUMBER 103961
- 6 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 7 CONTACTS : .000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 8 CONTACTS : .000030 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	L A MAYER	11-4-86	Tyco Electronics Corporation Harrisburg, Pa 17105-3608			
		CHK	P de Jong	11-12-86				
		APVD	J SCHIEFER	11-13-86	NAME			
		PRODUCT SPEC			RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 C/L, LATCHED & POLARIZED, FOR #26-#30 AWG WIRE SIZE			
		APPLICATION SPEC			SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		114-25026			A2	00779	C=103897	-
		WEIGHT						
		CUSTOMER DRAWING			SCALE	4:1	SHEET	1 OF 1
					REV			
					R1			