

## 15203B 25203B 35203B

Uniaxial

Biaxia

Triaxial

### SPECIFICATIONS

- ◆ Digital Accelerometers
- ◆ User Configurable  $\pm 1$  g to  $\pm 15$  g

### Inertial Measurements Made Fast and Easy

These Measurement Specialties digital accelerometers are complete, easy-to-use, user-configurable sensors containing one to three accelerometers, a temperature sensor, signal processor, RS-485 interface and three analog outputs in a small, easy-to-install package.

All channels are sampled simultaneously to avoid data skewing. The digital signal processor takes 16-bit samples, filters, ranges, and calibration compensates at up to 42,500 samples/sec/channel. Digital data can be streamed out at up to 3 Mbit/sec.

The output range, filter frequency and calibration of each channel, as well as telemetry configuration, can be set by the user via the RS-485 command processor. CRC-8 and CRC-16 error checking is used to ensure command and data integrity.

The built-in temperature sensor can be used by critical applications to correct for any residual temperature effects.

### FEATURES AND BENEFITS

#### User Configurable Settings

The analog/digital output range and low-pass filter of each digital accelerometer axis can be set via a built-in RS-485 interface using a free, downloadable Instrument Configuration Utility (ICU). An RS-485 to RS-232 adapter is available.

#### RS-485 Serial and Analog Outputs

Calibrated, ranged and filtered data can be streamed out at up to 3 Mbit/sec via RS-485. Analog outputs are also available for compatibility with existing systems.

#### High Accuracy and Linearity over Wide Temperature Range

Accelerometer accuracy is improved by minimizing variations due to temperature and aging effects. Each axial sensor has been tested over the  $-40^{\circ}$  to  $+85^{\circ}\text{C}$  temperature range.

#### Built-in Calibration

Calibration data for each sensor is maintained in the accelerometer. All digital data output is fully calibrated and easily converted to user-configurable engineering units.

#### Self-Test

Self-test commands help verify channel integrity and wiring connections.

**Small Size**

Complete conditioned triaxial accelerometer with digital signal processing in approximately two cubic inches.

**-Built-In Power Supply Regulation**

Unregulated DC power from +8.5 to +36 volts is all that is required to measure accelerations on all axes. Digital accelerometers are ideal for automotive applications as they survive both continuous reverse battery and load dump transients. MIL-STD-704A compatible.

**Easy Installation with Minimal Wiring Requirements**

A built-in terminal block or cable with 9-pin connector simplifies wiring. Tapped holes on bottom and back simplify horizontal or vertical mounting.

**Suitable for Harsh Environments**

These accelerometers are aluminum encased, potted, and are rugged enough to be used in harsh environments.

**Warranty**

These Measurement Specialties digital accelerometers come with a three-year factory warranty.

**SPECIFICATIONS FOR 15203B, 25203B AND 35203B - improved specifications available upon request**


T<sub>a</sub> = T<sub>min</sub> to T<sub>max</sub>; Acceleration = 0 g unless otherwise noted; within one year of calibration.

Parameter	Min	Typical	Max	Units	Conditions/Notes
<b>Accelerometers</b> Full Scale Range					On each axis. User configurable
Option R015			±15	g	
Option R006			±6	g	
<b>Sensitivity Drift</b> 25°C to T <sub>min</sub> or T <sub>max</sub>		±0.65		%	Percent of sensitivity at 25°C
<b>Zero g Drift</b> 25°C to T <sub>min</sub> or T <sub>max</sub>		60		mg	Repeatable, can be compensated
<b>Alignment</b>		±1.0	±3.0	degrees	Deviation from ideal axes
<b>Transverse Sensitivity</b>		0.25		%	Inherent sensor error, excluding misalignment
<b>Nonlinearity</b>		0.1		% FSR	Best fit straight line
<b>Frequency Response</b>	0 <sup>†</sup>		800 <sup>†</sup>	Hz	Lower filter cutoffs are user configurable
<b>Noise Density</b>		120		µg/√Hz	T <sub>a</sub> = 25°C
<b>Temperature Sensor</b>					
Range	-55		125	°C	
Resolution		0.25		°C	
Accuracy		±2.0	±3.5	°C	T <sub>a</sub> = -40 to 85°C
<b>Digital Signal Processor</b>					
Internal Word Size			32	bits	
Sensor Scan Rate		15,000	42,500	Hz	User configurable, channels processed in parallel
<b>Analog Outputs*</b>					Configurable to sensor
Voltage Swing	0.50		4.50	V	I <sub>out</sub> = 5 mA
Impedance to Analog-	100	130	220	Ω	
Nonlinearity			0.15	% FSR	Excluding sensor nonlinearity
<b>Digital Output Word Size</b>			16	bits	Filtered, gained and calibration corrected
<b>Power Supply (V<sub>s</sub>)</b>					
Input Voltage Limits	-80		+80	V	-80 V continuous, >36 V if <550 ms, duty <1%
Input Voltage - Operating	+8.5		+36	V	Continuous
Input Current		50		mA	
Rejection Ratio	80	120		dB	DC
<b>Temperature Range (T<sub>a</sub>)</b>	-40		85	°C	Terminal block Option T000 rated to -30°C
<b>Mass</b>		78		grams	
<b>Shock Survival</b>	-1500		+1500	g	Any axis for 0.5 ms, limited by oscillator


<sup>†</sup>User configurable low-pass filter 3dB cutoff (number poles configurable)

\*Each channel's offset and gain are configurable


## MECHANICAL

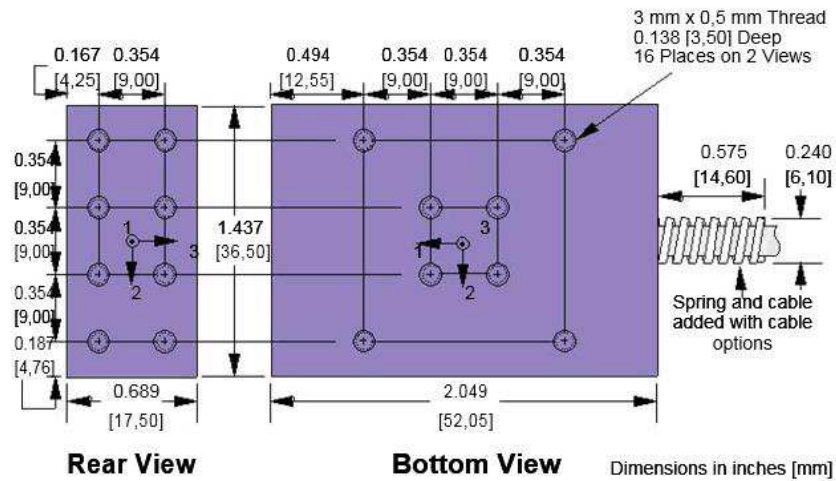

Mounting  
Adapters  
(Sold separately)




35170A Horizontal




35172A Vertical

## CONNECTIONS

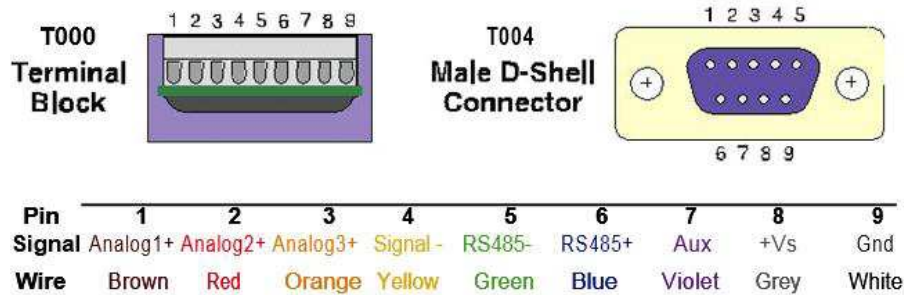

## ORDERING INFORMATION

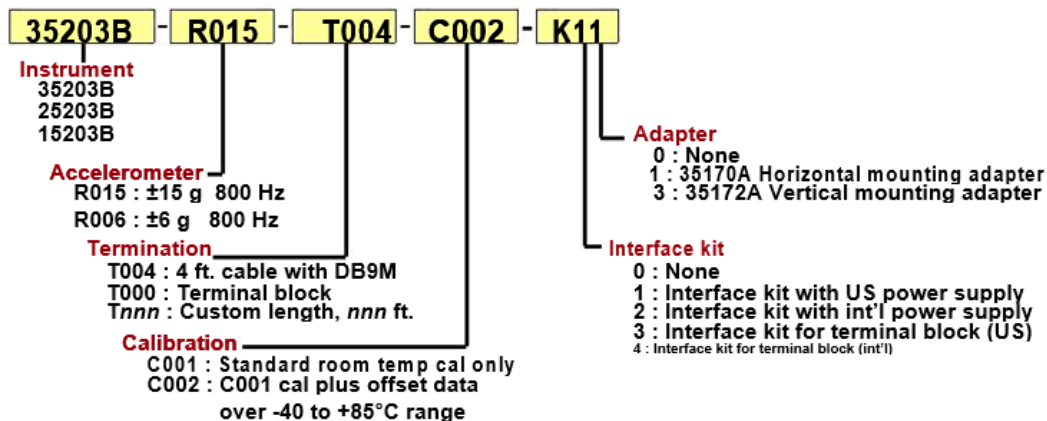

### NORTH AMERICA

Measurement Specialties, Inc.,  
 a TE Connectivity Company  
 Tel: 800-522-6752  
 Email: [customercare.hmpt@te.com](mailto:customercare.hmpt@te.com)

### EUROPE

MEAS France SAS  
 a TE Connectivity Company  
 Tel: 800-440-5100  
 Email: [customercare.lcsb@te.com](mailto:customercare.lcsb@te.com)

### ASIA

Measurement Specialties (China), Ltd.,  
 a TE Connectivity Company  
 Tel: 0400-820-6015  
 Email: [customercare.shzn@te.com](mailto:customercare.shzn@te.com)

### TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.