
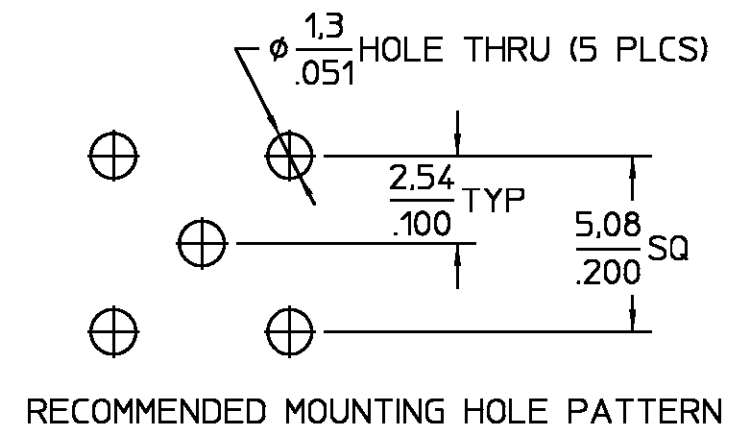


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A1	REVISED PER ECO-11-005294	14APR11	HMR

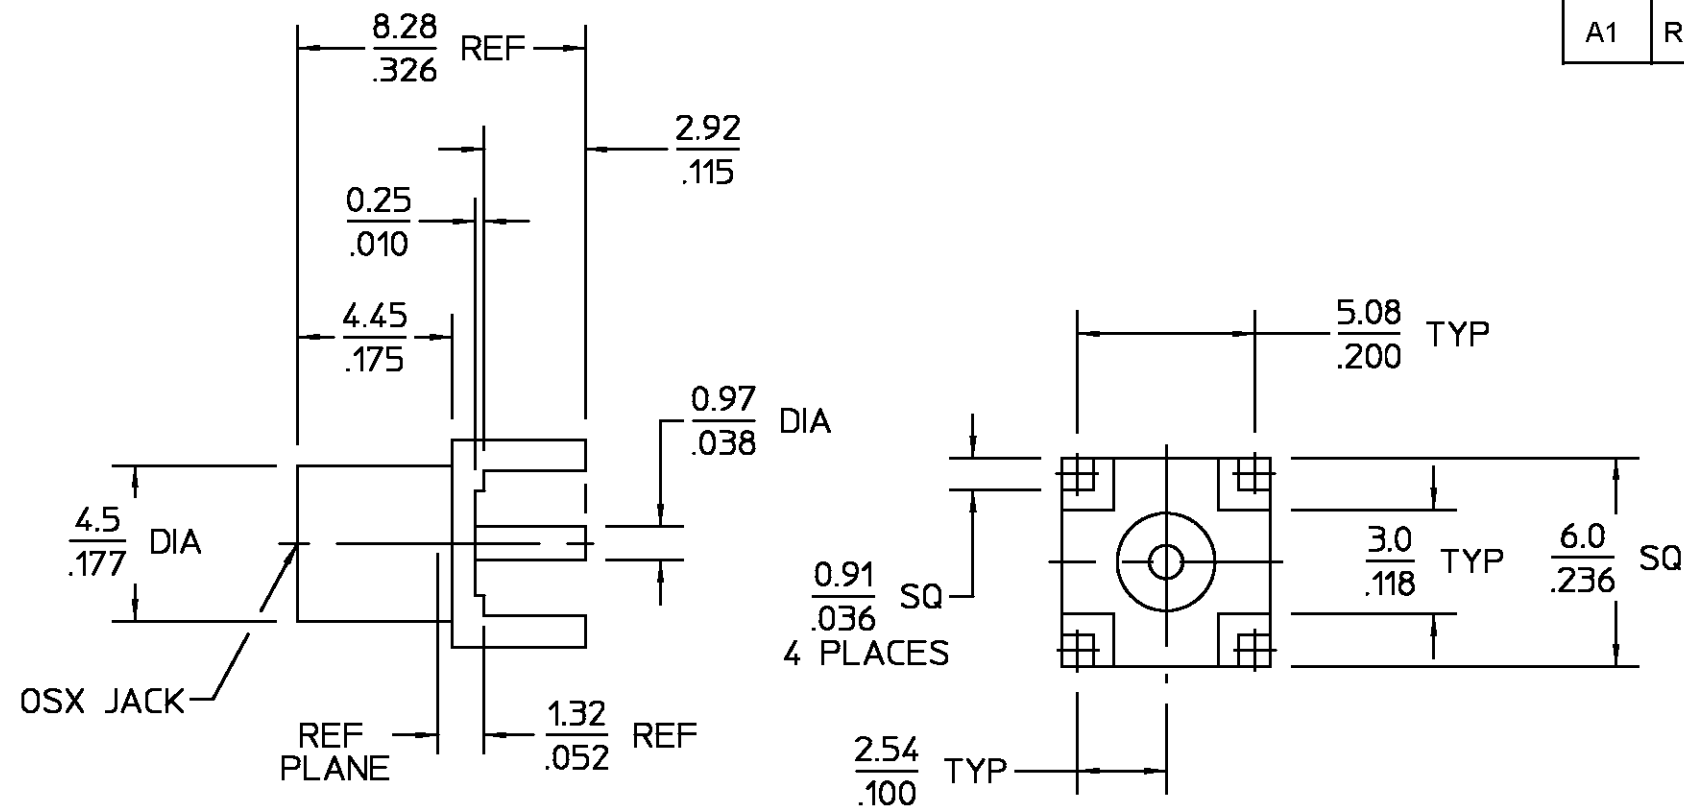

CAPTURED CENTER CONTACT

ELECTRICAL	MECHANICAL	ENVIRONMENTAL	HOUSING		BRASS, PER ASTM-B-16 HALF HARD		NICKEL PLATE PER QQ-N-290	
Nominal Impedance (Ohms) <u>50</u>	Force to Engage: (Lbs) <u>3.4 MAX</u>	Temperature Rating <u>-65°C to +165°C</u>	DIELECTRIC		TFE FLUOROCARBON PER ASTM-D-1457		N/A	
Frequency Range (GHz) <u>DC TO 6.0</u>	Force to Disengage: (Lbs) <u>1.77 MIN - 4.5 MAX</u>	Vibration <u>MIL-STD-202, Method 204,</u>	CENTER CONTACT		BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H		GOLD PLATE PER MIL-G-45204	
Voltage Rating (VRMS MAX) <u>335 @ Sea level</u>	Center Contact Captivation: <u>Axial 4.5lbs @ 1 minute</u> <u>with .006" displacement</u>	Condition B Thermal shock <u>MIL-STD-202, Method 107,</u>	COMPONENT		MATERIAL		FINISH	
VSWR <u>N/A</u>		Condition B Moisture Resistance <u>MIL-STD-202, Method 106</u>	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCE ON DEC ANGLES ±0.13 ± 1°	DRAWN BY K.C.MAHER	DATE 10/18/90	 TE Connectivity		
Insertion Loss <u>N/A</u>		Corrosion <u>MIL-STD-202,</u>		CHECKED BY M.Y.	10-19-90			
Corona, 70,000 Ft (VRMS MIN) <u>250</u>		Method 101, Condition B, <u>48 Hrs</u>		APPD BY QRL	10-19-90			
D.W.V. (VRMS MIN) <u>1000</u>				USE ASS'Y PROCEDURE	TITLE			
Contact Resistance				N/A	OSX PRINTED WIRING BOARD JACK RECEPTACLE STRAIGHT TERMINAL			
Center Contact (Milliohms MAX) <u>5.0</u>	XX.XX = mm .XXX = in			NO. AP_____	SIZE B	CODE IDENT NO. 26805	1060985-1	REV A1
Outer Contact (Milliohms MAX) <u>1.0</u>				CUSTOMER DRAWING	SCALE 5:1			SHEET 1 OF 1
RF High Potential (VRMS MIN @ 5 MHz) <u>670</u>								
I.R. (Megohms Min) <u>10,000</u>								