
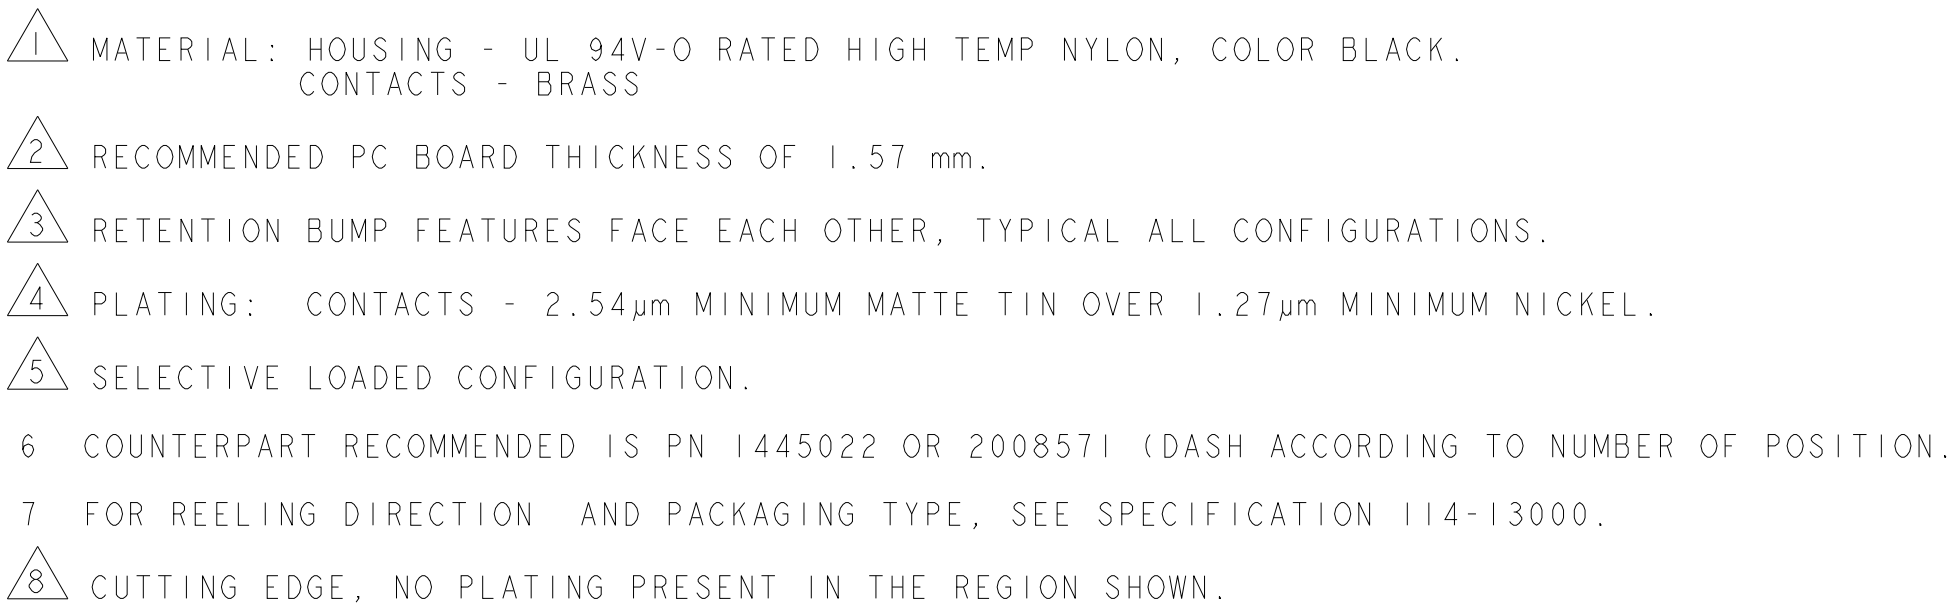


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B9	REVISED PER ECN-23-240910	23NOV2023	WLS	VS
	C	REVISED PER ECN-25-316179	14APR2025	WLS	JP

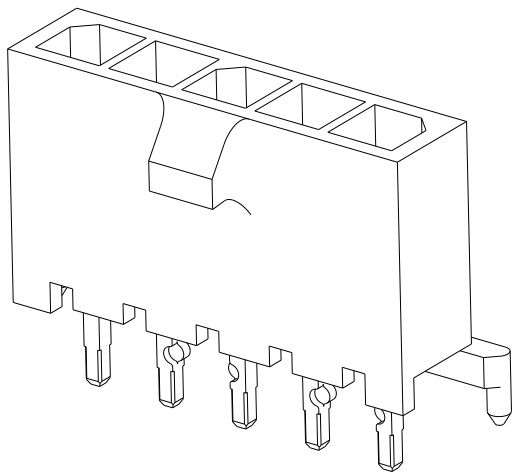

OBSOLETE	1, 4, 7, 10	27.00	33.14	31.00	10	5-1445050-0
	1, 2, 11, 12	33.00	39.14	37.00	12	3-1445050-2
	1, 2, 9, 10	30.00	36.14	34.00	11	3-1445050-1
	1, 2, 9, 10	27.00	33.14	31.00	10	3-1445050-0
OBSOLETE	1, 2, 7, 8	24.00	30.14	28.00	9	2-1445050-9
	1, 2, 7, 8	21.00	27.14	25.00	8	2-1445050-8
	1, 2, 5, 6	18.00	24.14	22.00	7	2-1445050-7
	1, 2, 5, 6	15.00	21.14	19.00	6	2-1445050-6
	1, 2, 3, 4	12.00	18.14	16.00	5	2-1445050-5
	1, 2, 3, 4	9.00	15.14	13.00	4	2-1445050-4
	1, 2	6.00	12.14	10.00	3	2-1445050-3
	1, 2	3.00	9.14	7.00	2	2-1445050-2
CON POS W/RET BUMP 		DIM Z	DIM V	DIM L	NO. OF POSN	PART NUMBER

									
I	X	X	4	X	X	7	X	X	10
I, 4, 7, 10					4-1445050-0				
PIN INSERTED					PART NUMBER				

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 080CT2000 J. ROOT CHK 190CT2000 K. WHITAKER APVD 12-MAR-2001 K. WHITAKER		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±. 2 PLC ±0.20 3 PLC ±. 4 PLC ±. ANGLES ±° MATERIAL FINISH		NAME VERTICAL THRU HOLE HEADER ASSY, TIN CONTACTS W/PCB POLARIZATION FEATURE, SINGLE ROW, MICRO MATE-N-LOK™	
		PRODUCT SPEC 108-1836 APPLICATION SPEC 114-13000		SIZE A2	
		WEIGHT -		CAGE CODE 00779	
		CUSTOMER DRAWING		DRAWING NO C-1445050	
				RESTRICTED TO -	
				SCALE 5:1 SHEET 1 OF 2 REV C	

