
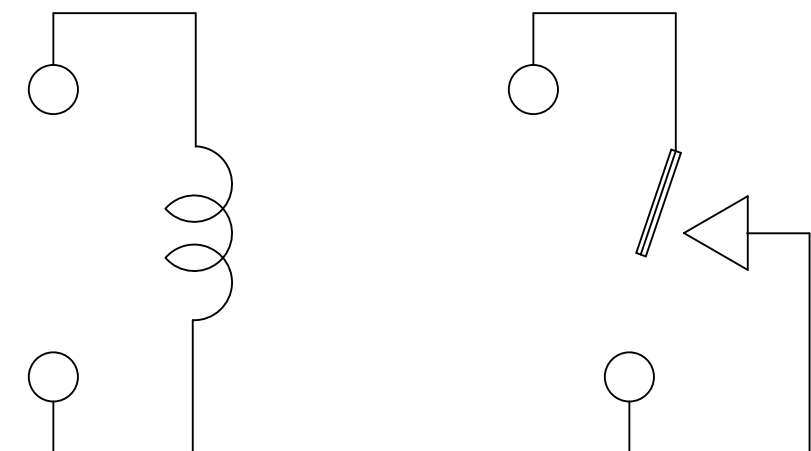
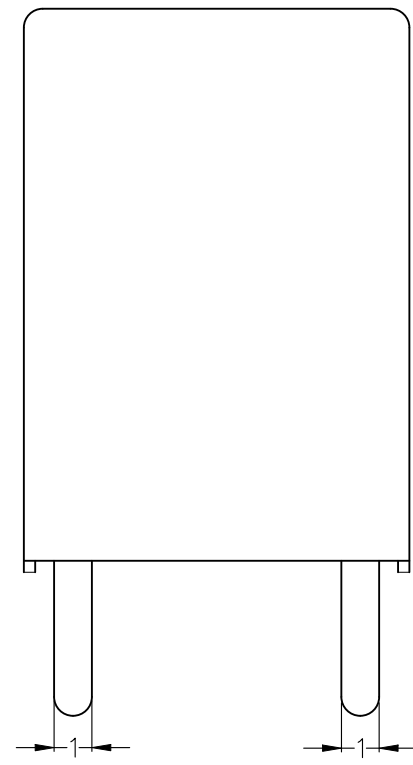
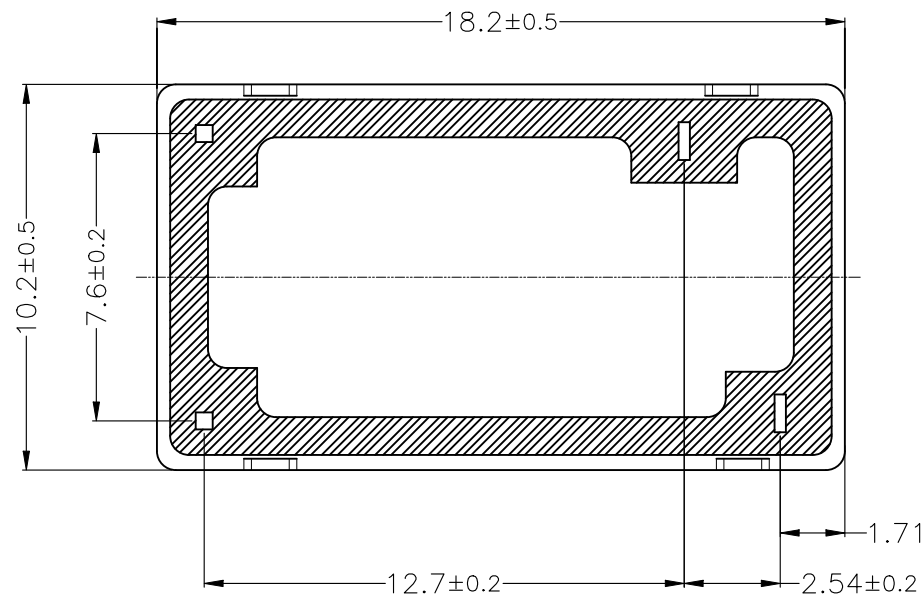
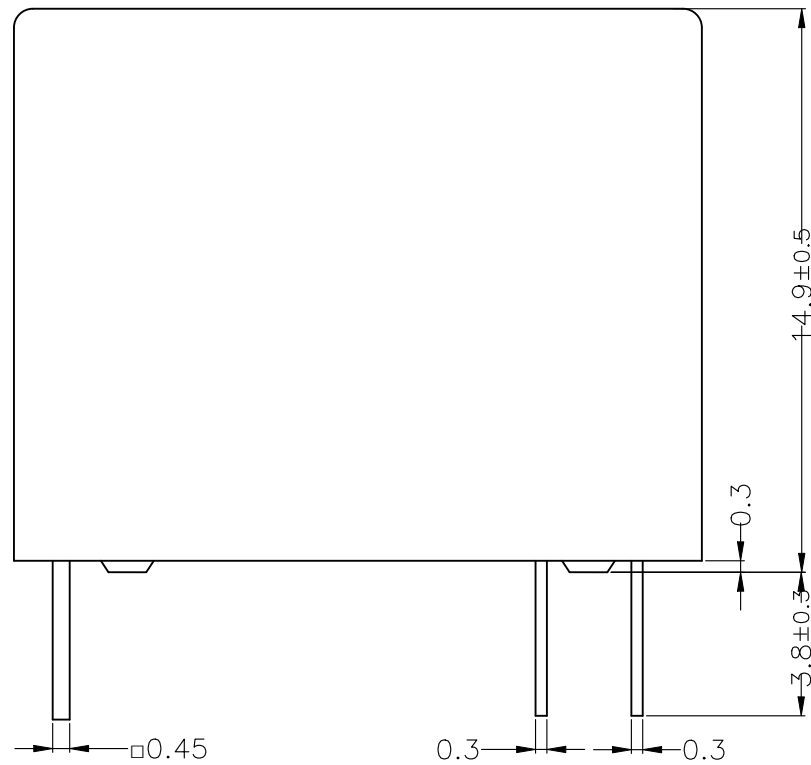


LOC	DIST	REVISIONS				
HB	—	P	LTR	DESCRIPTION	DATE	APVD
			D2	CHANGE PRODUCT DESCRIPTION.	2Sep2025	SL,Z Y,D

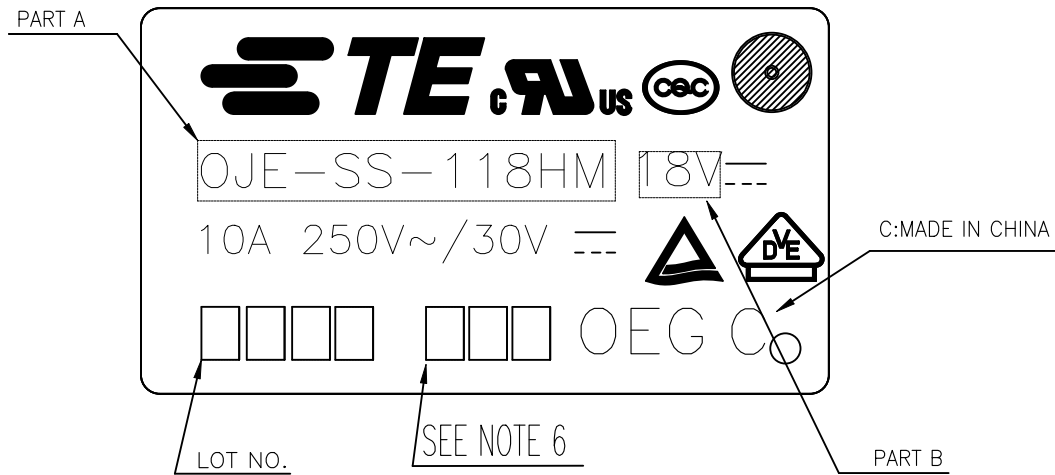

CONNECTION FIGURE

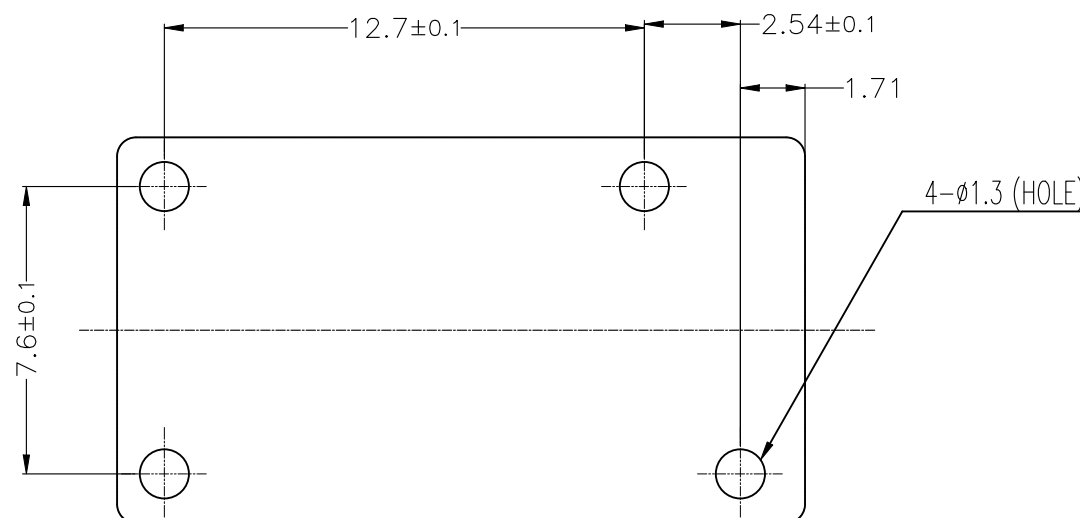


FIGURE FOR PRINTED CIRCUIT BOARD PROCESSING (BOTTOM VIEW)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	H.SASAKI	 TE Connectivity				
		CHK	Y.OIKAWA					
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	A.NAGAI	NAME				
	0 PLC ± -	PRODUCT SPEC	- OJE-SH-HM CUSTOMER DRAWING					
	1 PLC ± -	SEE PRODUCT SPEC	-					
	2 PLC ± -	APPLICATION SPEC	-					
	3 PLC ± -							
	4 PLC ± -		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
	ANGLES ± -	WEIGHT	A3	00779	C- 1461402	-		
MATERIAL	FINISH	CUSTOMER DRAWING				SCALE 5:1	SHEET 1 OF 2	REV D2


LOC	DIST	REVISIONS				
HB	—	P	LTR	DESCRIPTION	DATE	APVD
			—	SEE SHEET 1	—	—

1-1461402-1	OJE-SH-112HMF,000MO	107-79013	12V	OJE-SH-112HMF	h
1461402-1	OJE-SH-148HM	107-79010	48V	OJE-SH-148HM	g
1461402-2	OJE-SH-124HM	107-79010	24V	OJE-SH-124HM	f
1461402-6	OJE-SH-112HM	107-79010	12V	OJE-SH-112HM	e
1461402-3	OJE-SH-109HM	107-79010	9V	OJE-SH-109HM	d
1461402-5	OJE-SH-106HM	107-79010	6V	OJE-SH-106HM	c
1461402-4	OJE-SH-105HM	107-79010	5V	OJE-SH-105HM	b
1461402-7	OJE-SH-103HM	107-79010	3V	OJE-SH-103HM	a
TE CONNECTIVITY PART NO	TE CONNECTIVITY TYPE NAME	PACKAGE SPEC.	PART B	PART A	TYPE

RELAY TYPE

NOTES:

1.LOT NO. SYSTEM AS FOLLOWING:



2.TERMINAL DIMENSION IS BEFORE SOLDER DIP;


3.FOR THE TIN-PLATING OF THE PINS:

+0.1mm FOR WIDTH,THICKENSS AND DIAMETER.

+0.5mm FOR LENGTH.

4.MARKING FROM INK TO LASER AND USING WELDED CONTACT

5.ADD LOT NO. SYSTEM AS FOLLOWING;



I, DIGITS FOR DAY OF THE WEEK

1...MONDAY IN THIS WEEK;

2...TUESDAY IN THIS WEEK;

.....

7...SUNDAY IN THIS WEEK

II, DIGITS FOR SHIFT OF THE DAY

1...DAY SHIFT IN THIS DAY;

2...NIGHT SHIFT IN THIS DAY;

III, ONE CHARACTER DISTINGUISH THE LINE IDENTITY,
SUCH AS: A,B.....Z

		UV RESIN	SEAL (VENT HOLE)	16
		EPOXY RESIN	SEAL (BASE & BOBBIN)	15
		3UEW	MAGNETIC WIRE	14
94V-0		P.B.T	CASE	13
94V-0		P.B.T	BASE	12
94V-0		P.B.T	BOBBIN	11
	SOLDER DIP	C.P WIRE	COIL TERMINAL	10
94V-0		P.P.S	CARD	9
		Ag ALLOY	MOVABLE CONTACT	8
		Ag	NO.CONTACT	7
		STEEL	HINGE SPRING	6
	SOLDER DIP	PBP	NO.TERMINAL	5
	SOLDER DIP	Cu ALLOY	MOVABLE SPRING	4
	NIP	STEEL	CORE	3
	NIP	STEEL	ARMATURE	2
	NIP	STEEL	YOKE	1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	H.SASAKI	—	TE Connectivity			
		CHK	Y.OIKAWA	—				
DIMENSIONS: mm		APVD	A.NAGAI	—	NAME OJE-SH-HM CUSTOMER DRAWING			
		PRODUCT SPEC	SEE PRODUCT SPEC	—				
		APPLICATION SPEC	—	—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
MATERIAL		WEIGHT	—	—	A3	00779	C- 1461402	—
		CUSTOMER DRAWING			SCALE	5:1	SHEET	2 OF 2
								REV
								D2