


2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN,
THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.

 PARTS PACKAGED IN TUBES.


5 HOUSING: LCP, COLOR-BLACK.
POSTS: COPPER ALLOY.

6 0.00254-0.00504 [.000100-.000200] MATTE TIN ON SOLDER TAIL,
ALL OVER 0.00127 [.000050] NICKEL.

7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI.

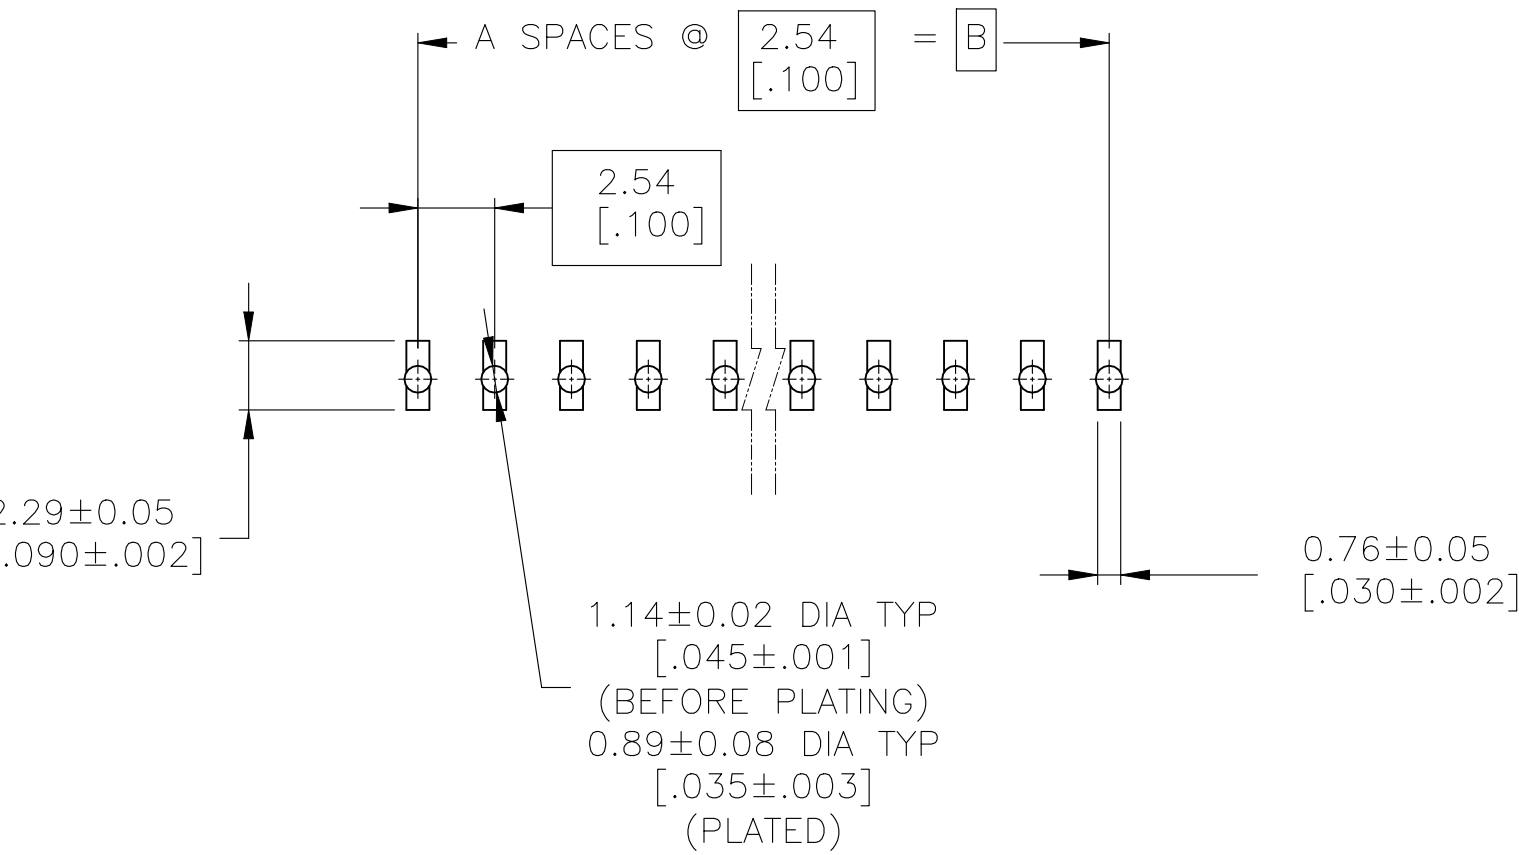

RECOMMENDED PC BOARD MOUNTING DIMENSIONS
FOR .063 [1.60] THICK PC BOARD AND
.012 [.305] STENCIL THICK.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG T. HOFFMAN 12 JUN 95 CHK G. DUBNICZKI 29 JUN 95 TAPD G. DUBNICZKI 29 JUN 95		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± 0.51[.02] 3 PLC ± 0.127[.005] 4 PLC ± 0.0127[.0005] ANGLES ± — FINISH SEE TABLE		NAME HEADER ASSEMBLY, MOD II, BREAKAWAY, SINGLE ROW, HIGH TEMPERATURE, VERTICAL W/.025 SQ. PØSTS, .100CL	
		PRODUCT SPEC		SIZE CASE CODE DRAWING NO RESTRICTED TO A1 00779 C-146282	
MATERIAL 		APPLICATION SPEC		WEIGHT —	
CUSTOMER DRAWING		SCALE 4:1		SHEET 1 OF 1 REV K.	