

114-19025

NUMBER

SECURITY CLASSIFICATION

DC


USA

APPLICATION SPECIFICATION


1. SCOPE

this specification covers the requirement for application of 187 and 250 srs Low Insertion Force FASTON rec. contacts. These requirements are applicable to hand or automatic machine crimping tools. For specific wire and insulation ranges relative to the products covered in this specification refer to the appropriate AMP Customer Drawing.

2. PRODUCT FEATURES

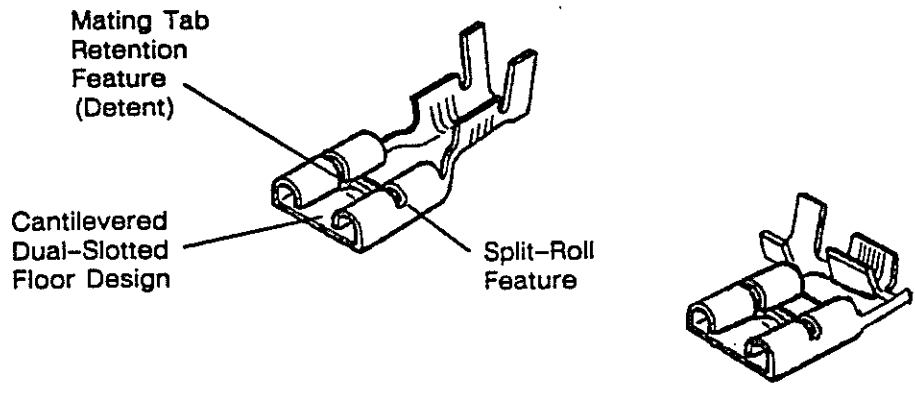

3. NOMENCLATURE

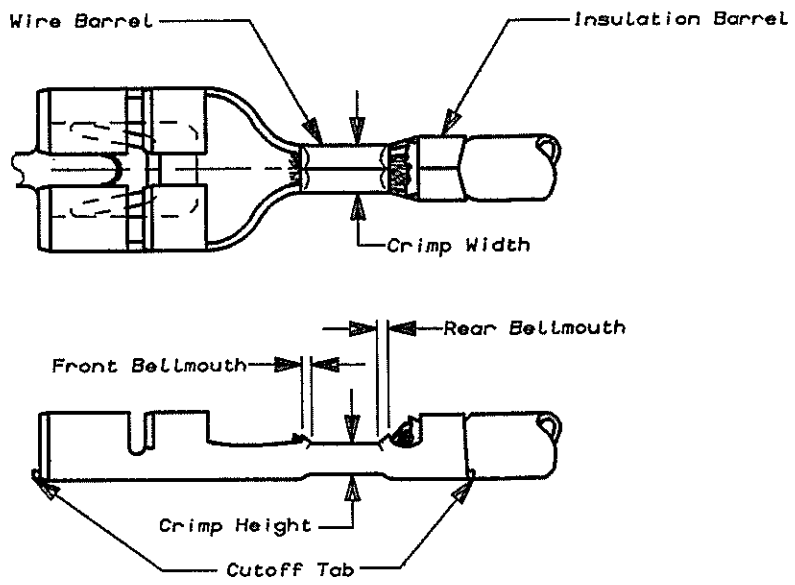

COPYRIGHT 1982 BY AMP HOLLAND B.V. APPLICATION SPECIFICATION

LOC. H
SIZE A4

LTR	REV. RECORD	DR.		DATE

DR.	DATE
P. BEIJNON	25.02.92
CHK.	DATE
A. BIJNEN	-
APP.	DATE
L. VAN SOEST	1.4-92

AMP		AMP HOLLAND B.V. s-Hertogenbosch, The Netherlands.	
NAME CONTACT, RECEPTACLE, FASTON, LOW INSERTION FORCE (LIF) .187 (4,8) AND .250 (6,3) SERIES APPLICATION OF			
NO. 114-19025		SHEET 1 OF 5	REV. 01

NUMBER 114-19025

SECURITY CLASSIFICATION

DC

4. PRODUCT SELECTION

Partnumber	wire size mm ²	Ins. range dim. in mm	Tab dim's
6,35 srs straight			
100495	0,5 - 1,5	2,3 - 3,3	6,35 x 0,8
100570	1,0 - 2,5	3,0 - 4,3	6,35 x 0,8
4,8 srs straight			
100494	0,5 - 1,5	2,3 - 3,3	4,8 x 0,8
100674	1,0 - 2,5	3,0 - 4,3	4,8 x 0,8
100651	0,5 - 1,5	2,3 - 3,3	4,8 x 0,5
100675	1,0 - 2,5	3,0 - 4,3	4,8 x 0,5
6,35 srs Flag			
100644	2,0 - 3,8	2,0 - 3,8	6,35 x 0,8
100645	2,5 - 3,8	2,5 - 3,8	6,35 x 0,8

5. CRIMP AND DIMENSIONAL REQUIREMENTS

5.1. Wire Preparation

A. Strip Length

Insulation shall be stripped as indicated in Figure 2 and is based on wire barrel length.

Wire Barrel Length	Wire Strip Length
2,4 - 2,7	3,2
2,8 - 3,6	4,0
3,7 - 4,4	4,8
4,5 - 5,2	5,6
5,3 - 6,0	6,4
6,1 - 6,8	7,2

B. Workmanship

Reasonable care shall be taken not to nick, scrape or cut any strands or the solid wire during the stripping operation.

5.2. Carrier Cutoff Tab

Cutoff tab shall not exceed .020

LOC.

H

SIZE

A4

AMP

AMP HOLLAND B.V.
s-Hertogenbosch,
The Netherlands.

NO.

114-19025

SHEET
2 OF 5

rev.
01

NUMBER 114-19025

NUMBER

SECURITY CLASSIFICATION

DC

5.3. Wire Barrel Crimp

A. Crimp Dimensions and Type

Crimp height, width and type shall be as shown in the appropriate Applicator Log Sheet for machine applications or the Instruction Sheet for handtool applications.

B. Wire Barrel Flash

Wire barrel flash shall not exceed .005



C. Wire Barrel Seam

Wire barrel seam shall be completely closed and there shall be no evidence of loose wire strands or wire strands visible in the seam.

D. Bellmouth

- (1) Rear bellmouth length shall be .015 - .025
- (2) Front bellmouth length shall not exceed .025

E. Conductor Location

- (1) End of the wire shall be flush with the front end of the wire barrel or extend .015 max. after crimping.
- (2) Both insulation and conductor shall be visible between the insul. and wire barrel. Care shall be taken not to allow insulation to be crimped in the wire barrel.

5.4. Insulation Barrel Crimp

Reasonable care shall be taken not to cut or break the insulation during the crimping operation.

5.5. Alignment

A. Straightness

- (1) The contact, including the cutoff tab and burr shall not be bent above or below the datum line more than the amount shown in figure 3.

COPYRIGHT 19 -
BY AMP HOLLAND B.V.
ALL INTERNATIONAL RIGHTS RESERVED.

LOC.

H

SIZE

A4

AMP


AMP HOLLAND B.V.
s-Hertogenbosch,
The Netherlands.

NO.


114-19025

SHEET
3 OF 5

REV.
01

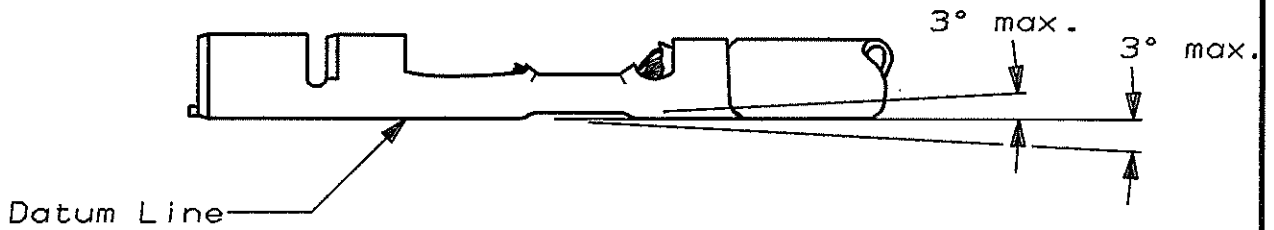

(2) The side to side bending of the contact shall not exceed the limits specified in figure 4.

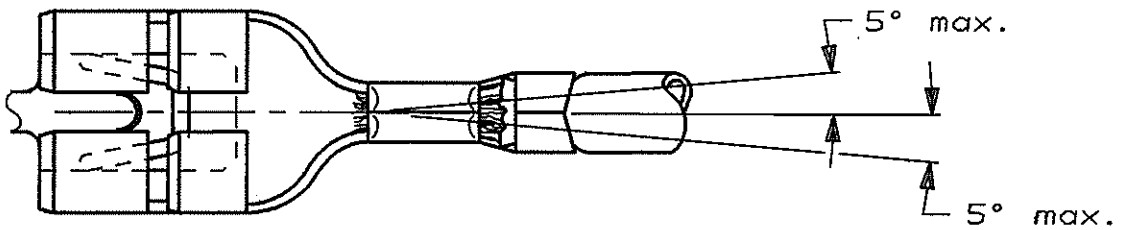

B. Twist or Roll

C. Crimped terminal requirements

- (1) No damaging of mating area.
- (2) Cut-off tab 0,5 mm max.

Twist or roll of the crimped contact shall not exceed the limits specified in Figure 5.

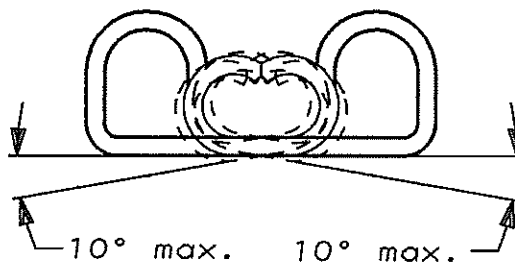


Figure 5.

6. Storage and Chemical Exposure Limitations

The chemicals listed below can cause stress corrosion cracking in brass receptacles.

- Alkalies, Amines, Ammonia, Carbonates, Citrates
- Nitrites, Phosphates, Sulfides, Sulfur Compounds
- and Tartrates.

COPYRIGHT 19
BY AMP HOLLAND B.V.
ALL INTERNATIONAL RIGHTS RESERVED.

LOC.
H

SIZE
A4

NUMBER

114-19025

AM SECURITY
CLASSIFICATION

DC

Where the above environmental conditions exist, phosp.
bronze receptacles are recommended instead of brass.

AMP

AMP HOLLAND B.V.
s-Hertogenbosch,
The Netherlands.

NO. 114-19025

SHEET
5 OF 5

REV.
01