


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC GP	DIST 00	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H	REVISED PER ECO-12-005295	20/MAR/12	ECC	GG

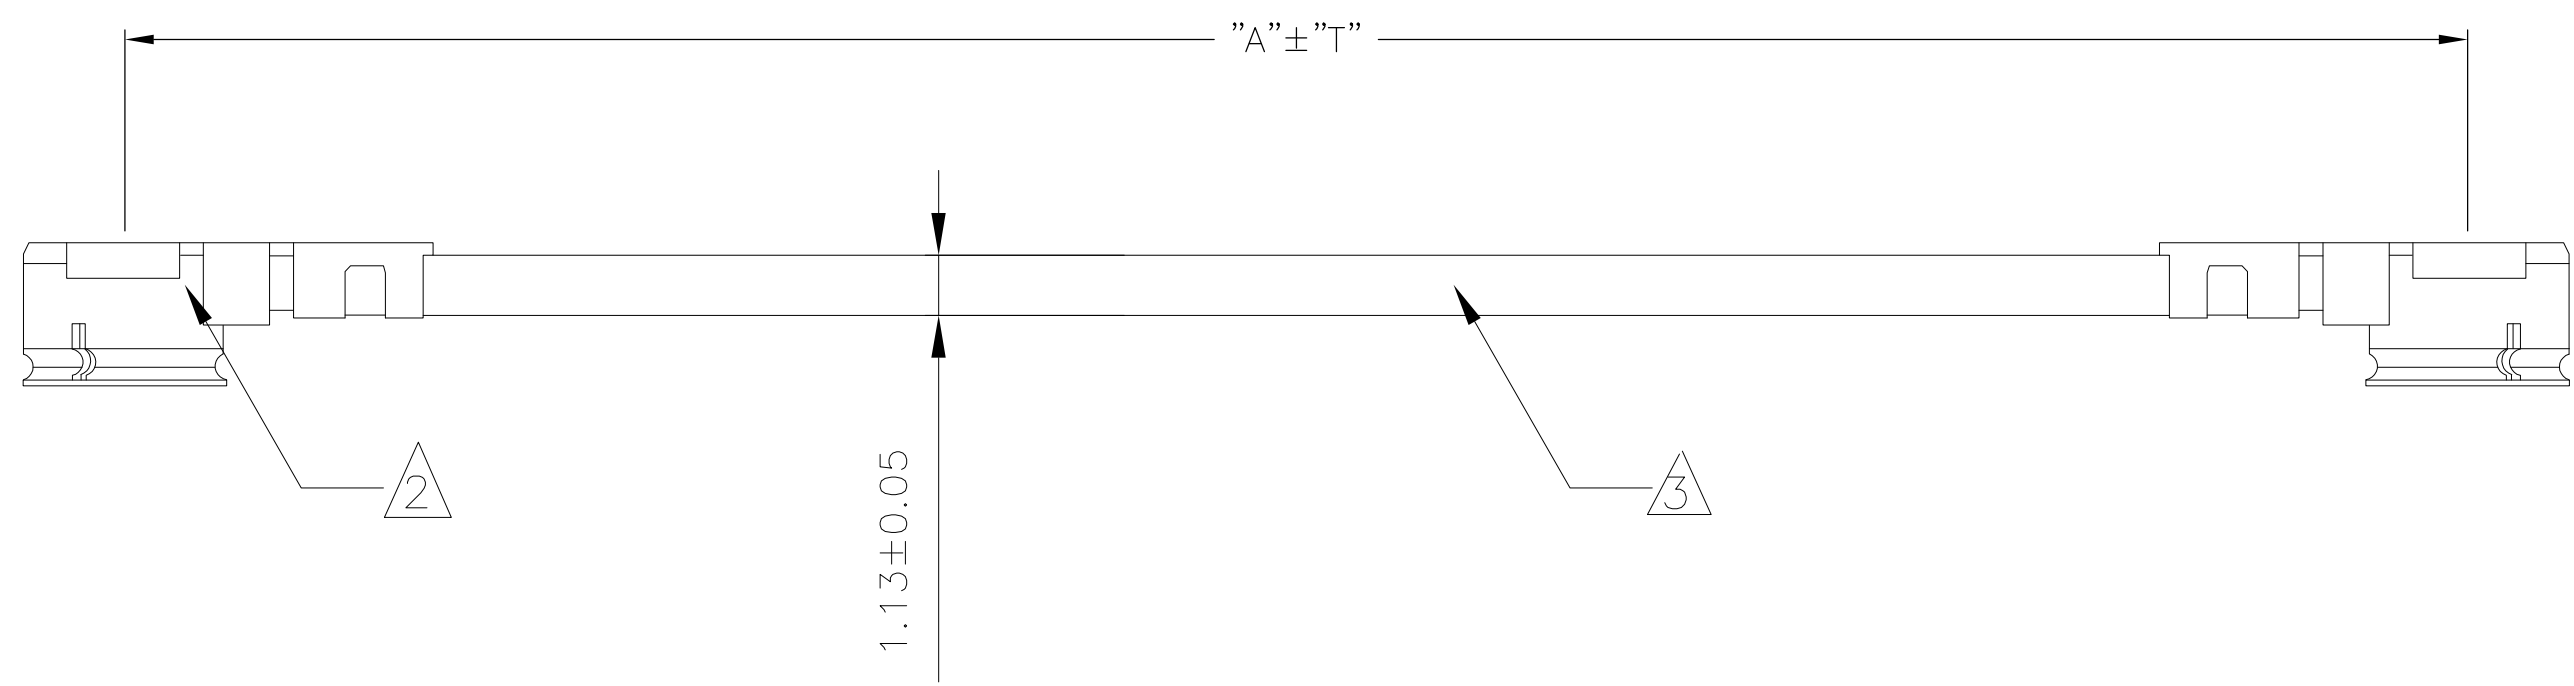

NOTES:

- CABLE ASSEMBLY TO BE 100% TESTED FOR OPENS, SHORTS & CONTINUITY
 HI-POT:200 VDC FOR 100ms
 INSULATION RESISTANCE: 50M OHMS MIN
 CONTINUITY RESISTANCE: 2 OHMS MAX
 FREQUENCY RANGE: DC TO 6 GHz
 VSWR: 1.5:1 MAX
- CONNECTOR: TYPE III U.FL, MATING HEIGHT 2.5mm.
- CABLE: 1.13mm OD, 50 OHMS FEP INSULATED COAX, BLACK JACKET
- PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE STANDARD TEC-138-702.("ROHS").

OBSOLETE	2	140	2015487-8
OBSOLETE	2	190	2015487-7
	2	50	2015487-6
OBSOLETE	3	200	2015487-5
OBSOLETE	2	100	2015487-4
OBSOLETE	2	60	2015487-3
OBSOLETE	2	80	2015487-2
OBSOLETE	3	300	2015487-1
	TOLERANCE "T" (mm)	LENGTH "A" (mm)	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Chen Ping 21APR08	TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK Eric Chen 29JUNE08			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD Jeff Orner 30JUNE08	NAME RF C/A, UMCC TO UMCC, TYPE III, 1.13MM CABLE		
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC -	-		
MATERIAL -		FINISH -	APPLICATION SPEC -	SIZE A3	CAGE CODE 00779
		WEIGHT -	DRAWING NO C-2015487	RESTRICTED TO -	
CUSTOMER DRAWING			SCALE N.T.S.	SHEET 1 OF 1	REV H