
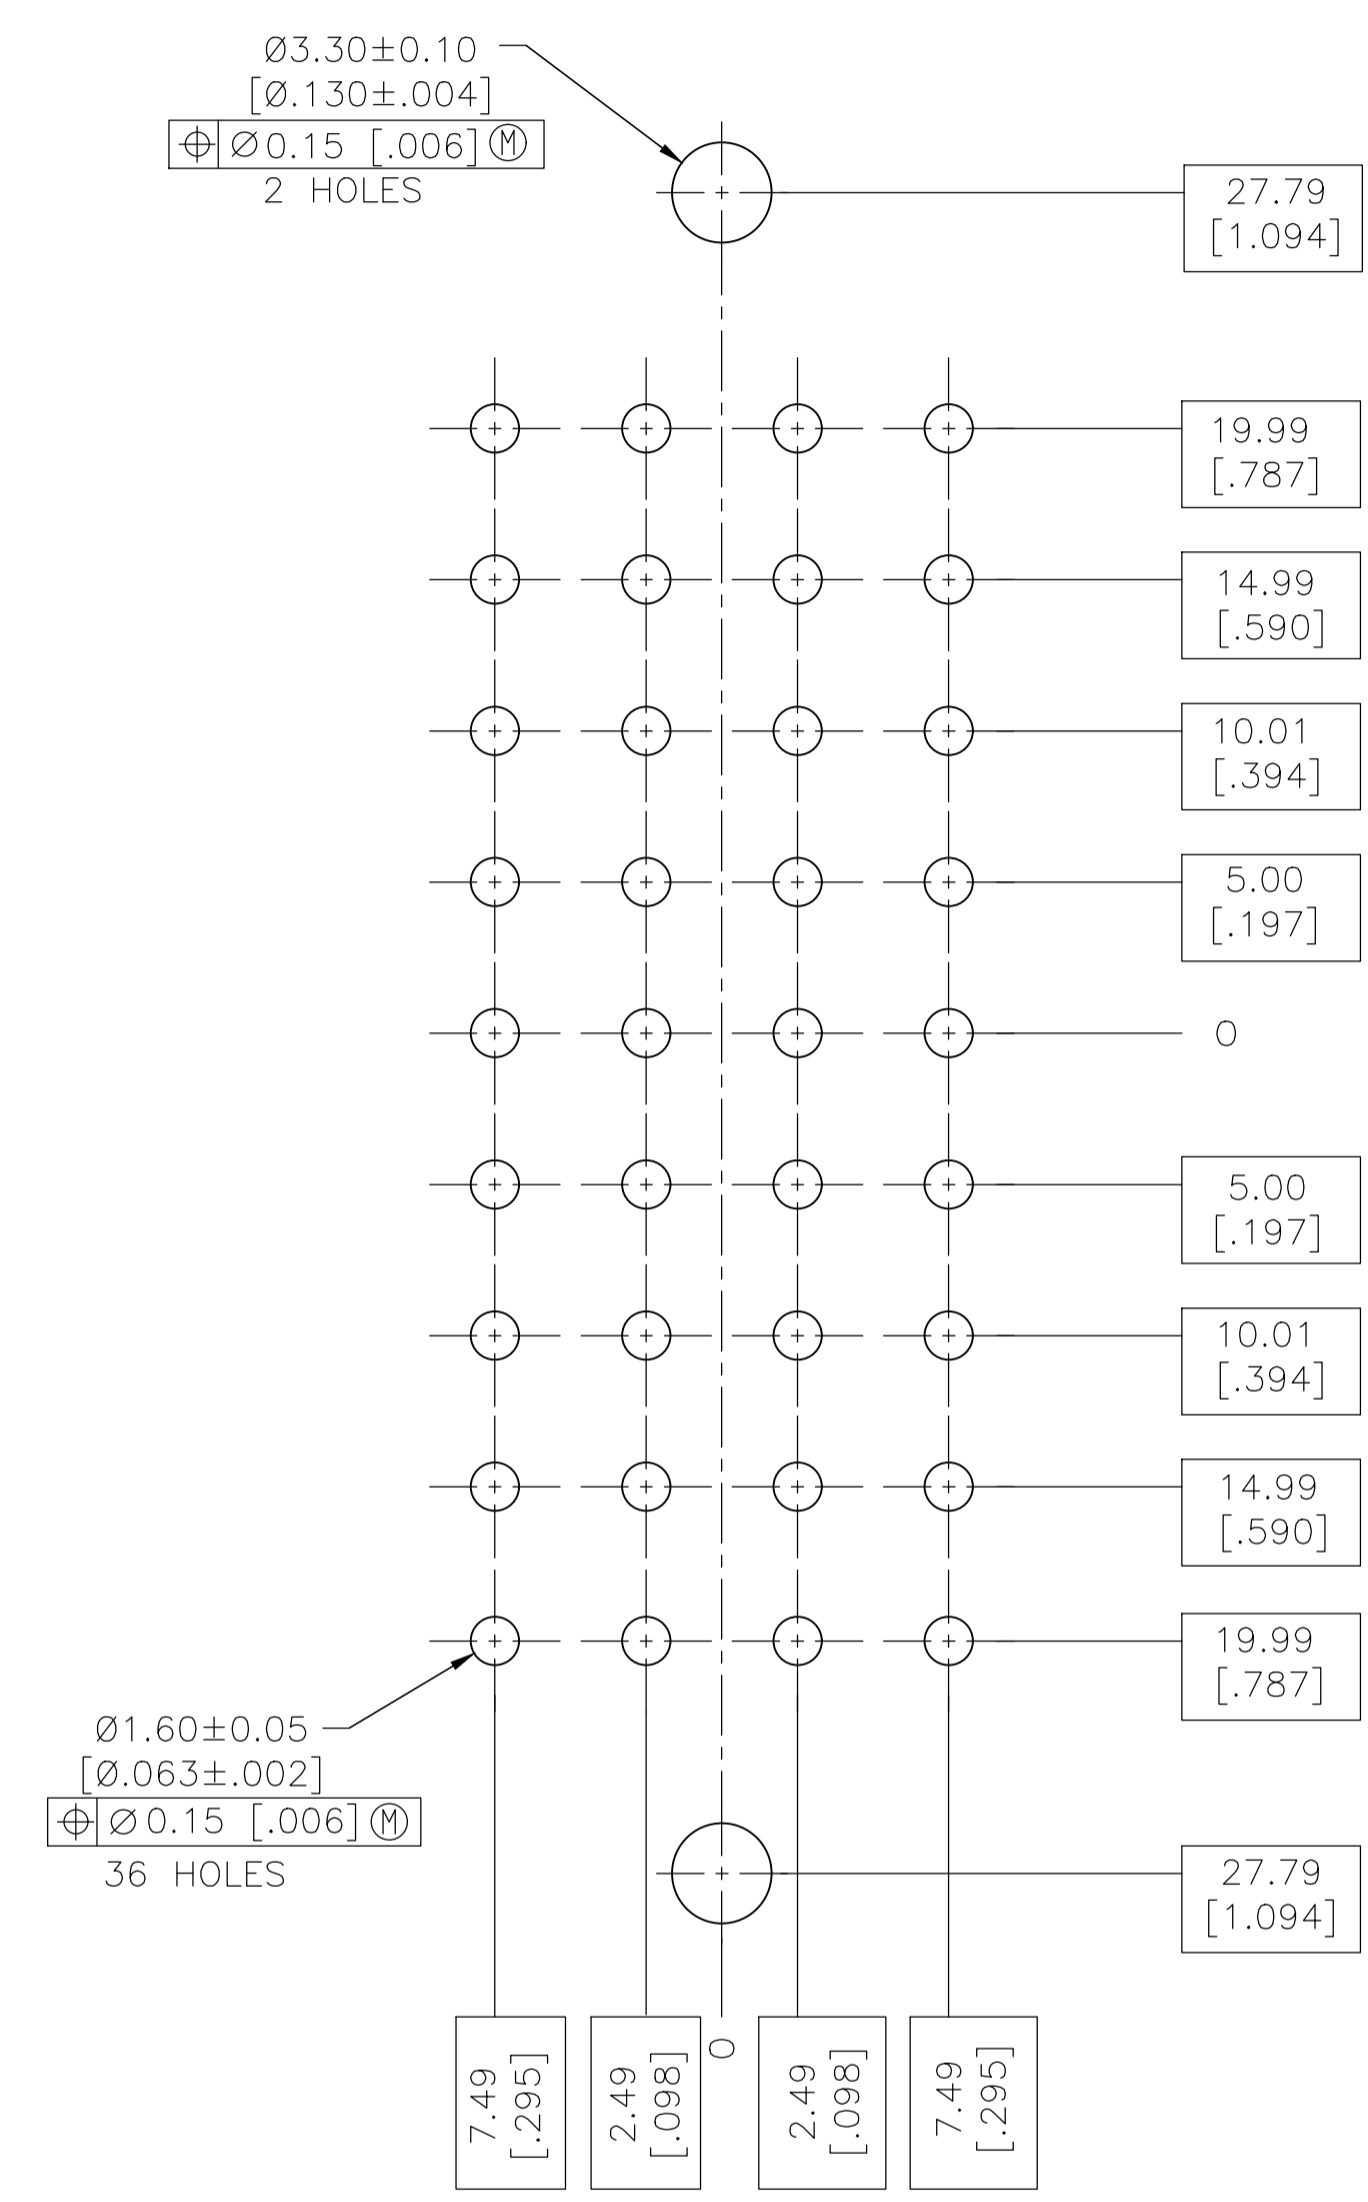
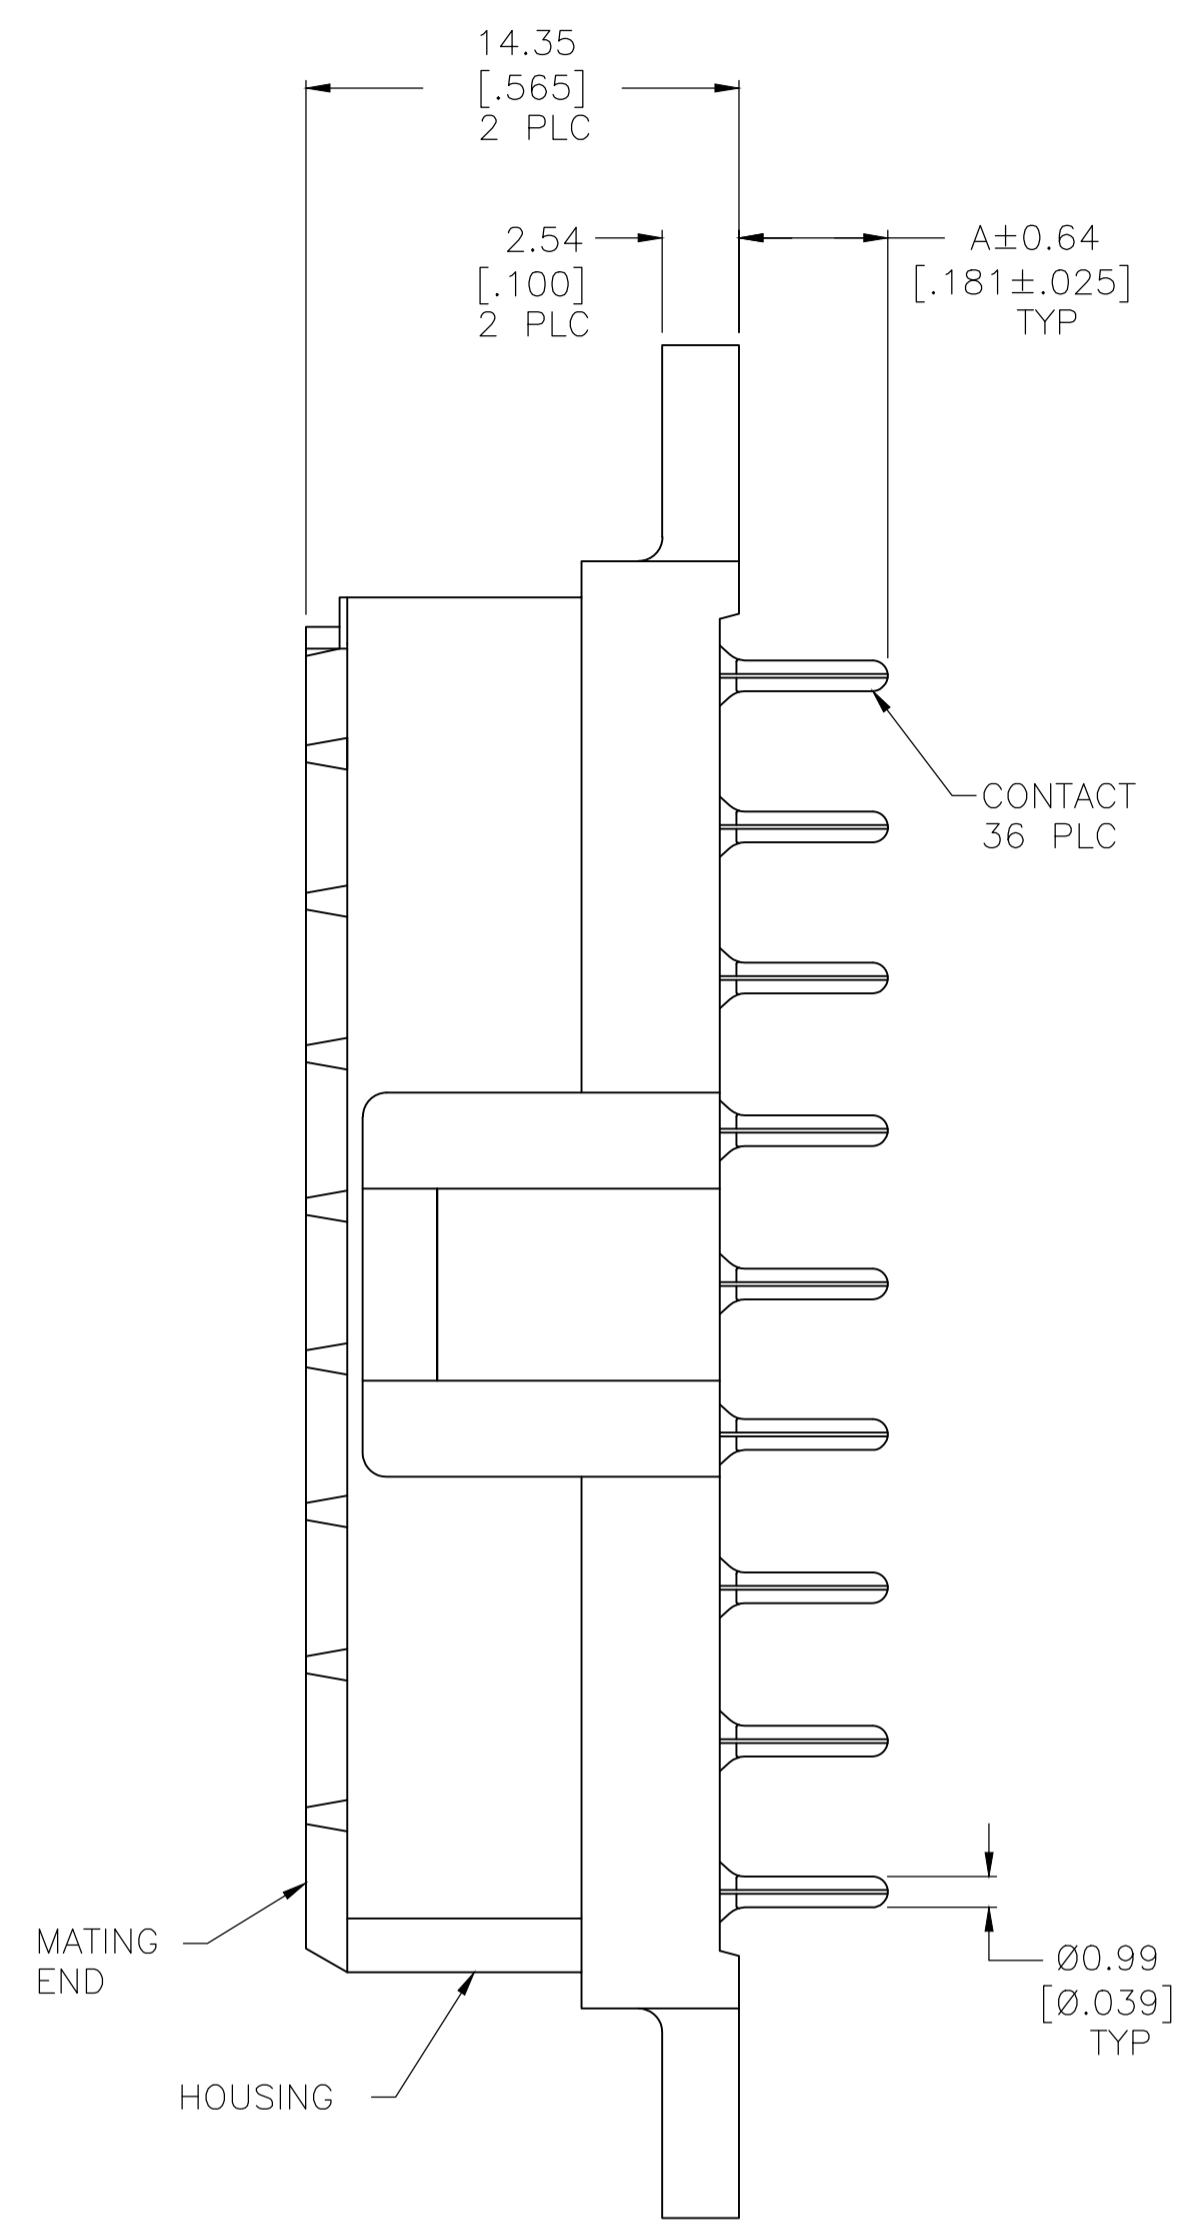


REVISIONS					
P	LTR	DESCRIPTION	DATE	DMN	APVD
P		REVISED PER ECO-17-011181	04AUG2017	RS	MZ
R		REVISED PER ECO-18-000441	24JAN2018	RS	MZ
S		REVISED PER ECO-20-002046	17FEB2020	RK	MZ

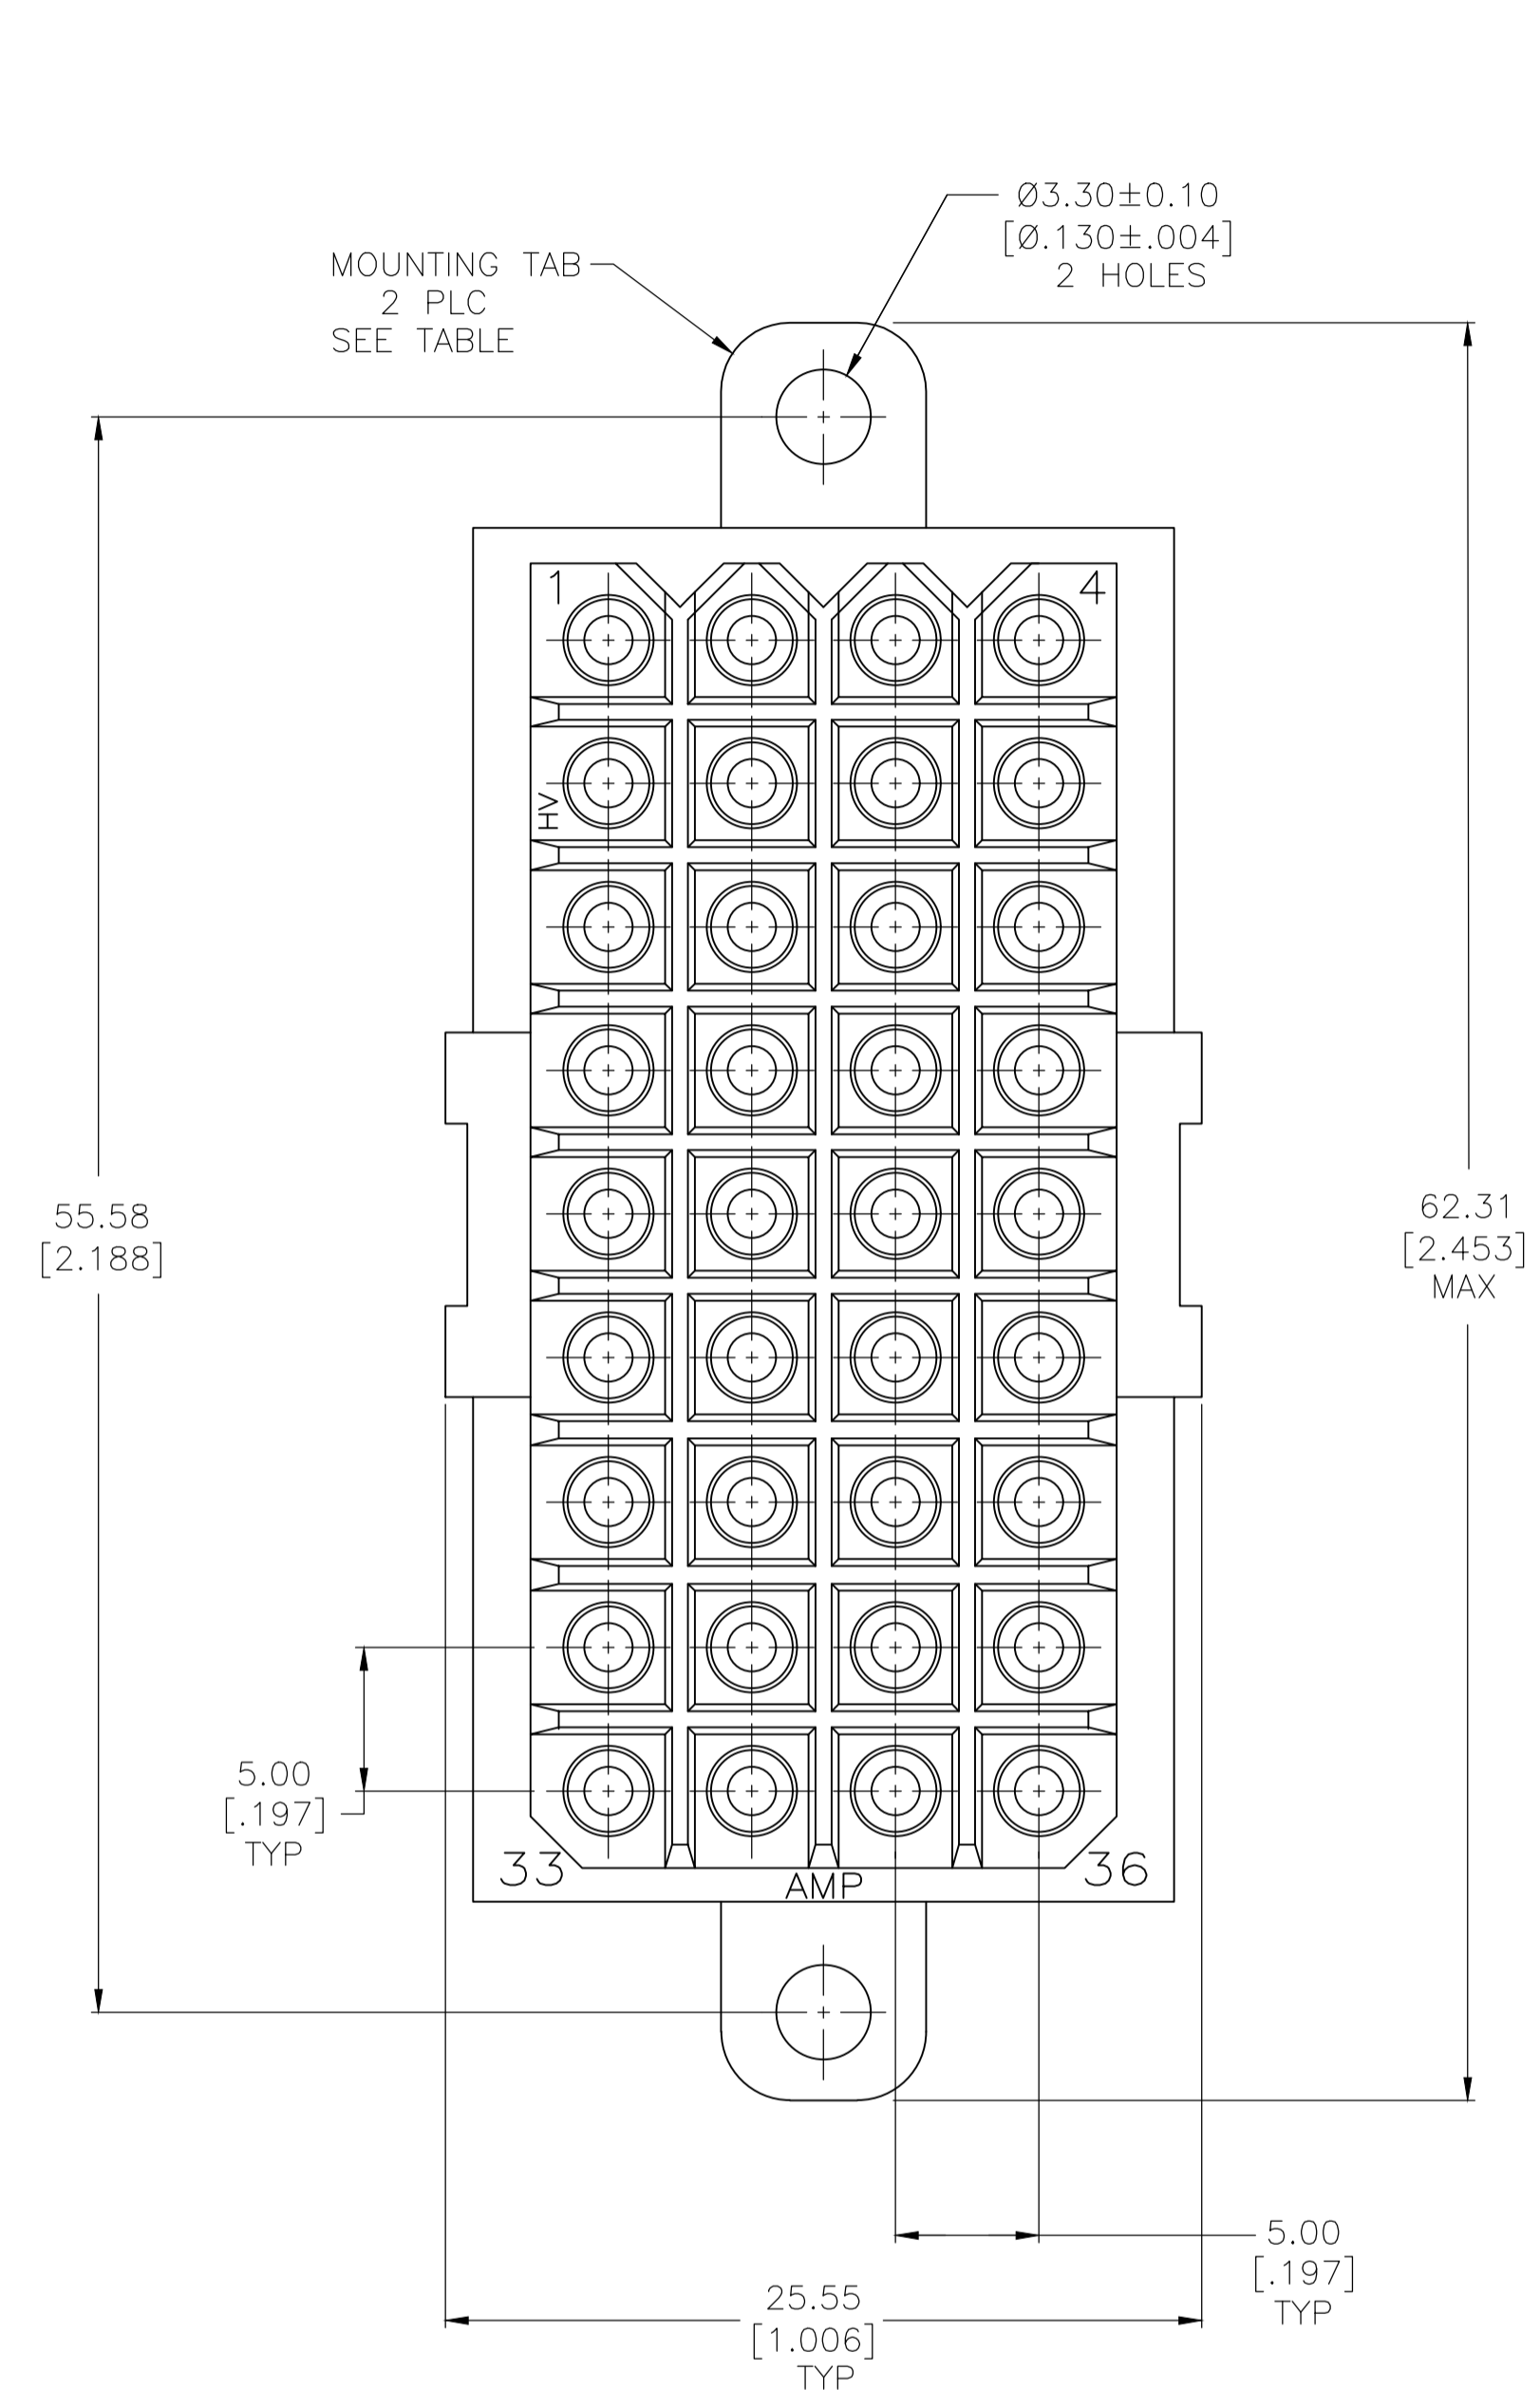

RECOMMENDED LAYOUT

- 1 HOUSING MATERIAL: PA66, BLACK, UL 94 V-0 RATED.
- 2 CONTACT MATERIAL: PHOSPHOR BRONZE.
- 3 3.81µm [.000150] MIN TIN-LEAD OVER 1.27µm [.0000050] MIN NICKEL.
- 4 0.76µm [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END 3.81µm [.000150] MIN TIN-LEAD FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER 1.27µm [.000050] MIN NICKEL.
- 5 .000150 MIN LEAD FREE TIN OVER .000050 MIN NICKEL.
- 6 0.76µm [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END 3.81µm [.000150] MIN TIN FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER 1.27µm [.000050] MIN NICKEL.
- 7 PRILIMINARY PART NUMBER.
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI.

REV	DESCRIPTION	DATE	DMN	APVD
1	REVISED PER ECO-17-011181	04AUG2017	RS	MZ
2	REVISED PER ECO-18-000441	24JAN2018	RS	MZ
3	REVISED PER ECO-20-002046	17FEB2020	RK	MZ

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN L/SIPE 03/20/92	03/20/92
0 PLC ± -	1 PLC ± -	3-25-92	3-25-92
2 PLC ± 0.25 [.010]	3 PLC ± -		
4 PLC ± -	ANGLES ± -		

MATERIAL: SEE NOTE FINISH: CONTACT: SEE TABLE WEIGHT: --

CUSTOMER DRAWING SCALE: 4:1 SHEET 1 OF 1 REV S

STE TE Connectivity

SOCKET HEADER ASSEMBLY, 36 POSITION, METRIMATE

108-10033

SIZE: A1 CASE CODE: 00779 DRAWING NO: 207534