

216X Ø 0.46 ± 0.05  
PLATED THRU HOLE

216X Ø 0.48 ± 0.013  
DRILL HOLE  
Ø 0.10


RECOMMENDED PCB LAYOUT  
MIN BOARD THICKNESS 1.0

LOC	DIST	REVISIONS			
AD	00	REV	DATE	BY	APPV
		C	09MAR2015	AP	DD

⚠ MATERIAL:  
HOUSING: LCP, GLASS FILLED, UL94V-0.  
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.

⚠ FINISH:  
30µ" SELECTIVE GOLD IN CONTACT AREA. SELECTIVE TIN  
ON PCB TAILS, NICKEL OVERALL.

3. CONNECTORS SUPPLIED WITH MOUNTING SCREWS.

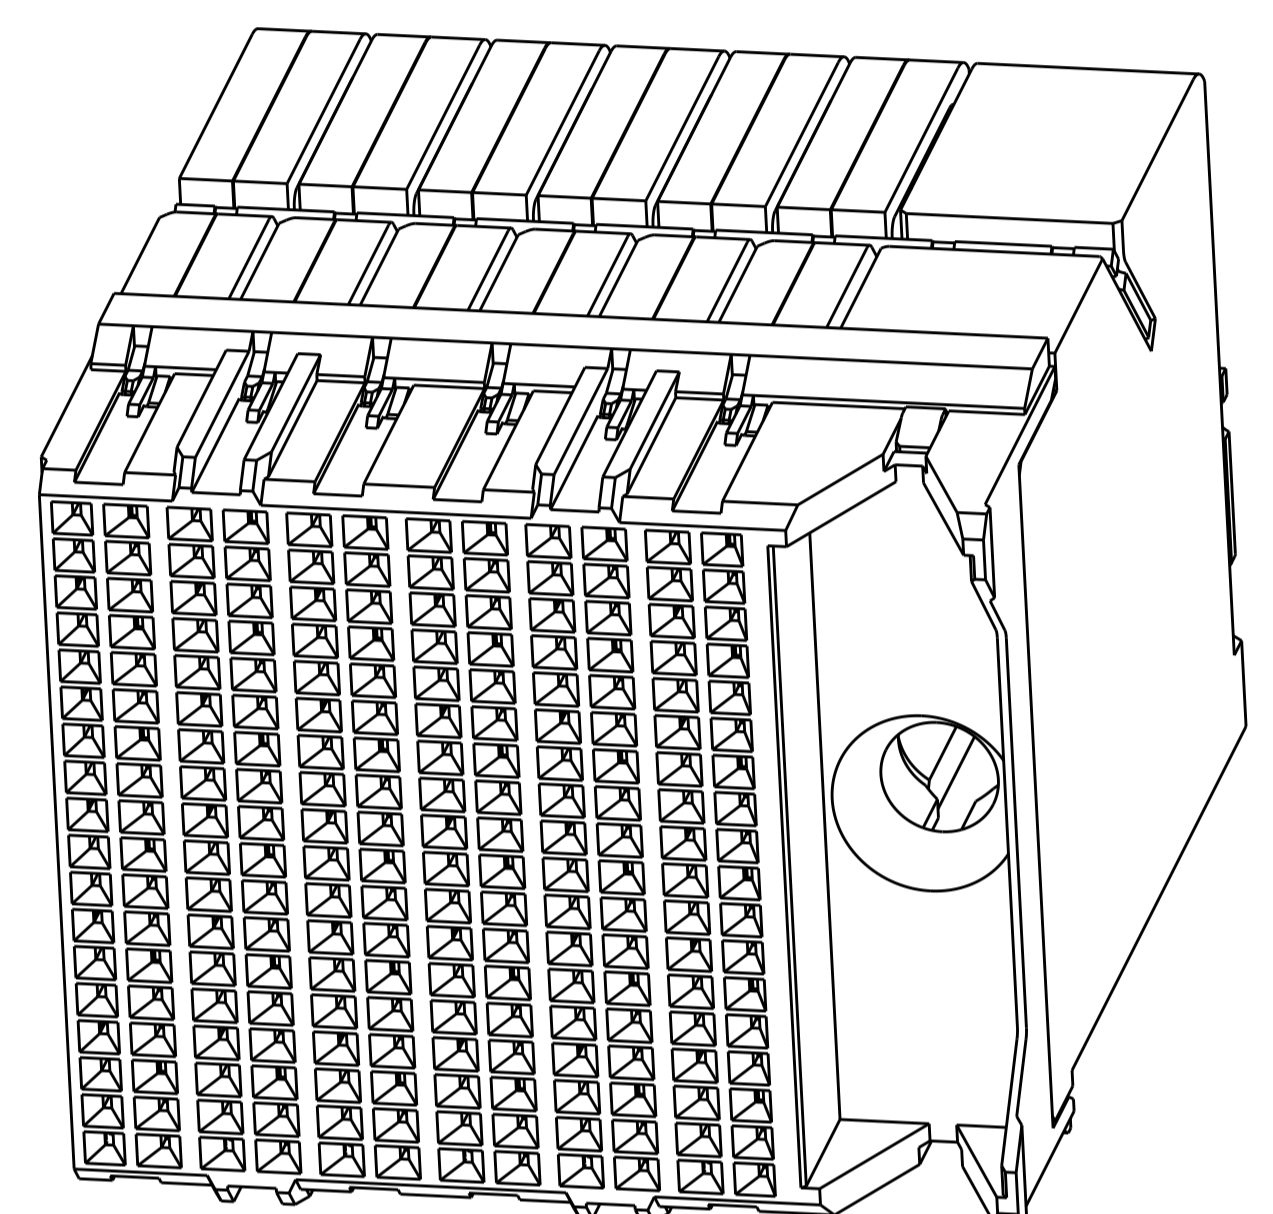

SCALE 4:1

REFER TO WWW.TE.COM  
FOR PRODUCT AVAILABILITY

NONE	⚠	2132728-1
KEY POSITION	FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	11MAY2011	 TE Connectivity			
DIMENSIONS:		CHK	D. DIXON 11MAY2011				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	D. DIXON 11MAY2011				
mm		PRODUCT SPEC					
0 PLC ± 1 PLC ±0.25 2 PLC ±0.15 3 PLC ± 4 PLC ± ANGLES ±		APPLICATION SPEC		NAME	IMPACT, ORTHOGONAL, 6 PAIR, DAUGHTERCARD, 12 COLUMN, RIGHT GUIDED, SIGNAL MODULE, 0.46 EYELET		
MATERIAL		WEIGHT		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
FINISH		SEE TABLE		A1	00779	©=2132728	
CUSTOMER DRAWING		SCALE	5:1	SHEET	1	OF	1
		REV	C				