
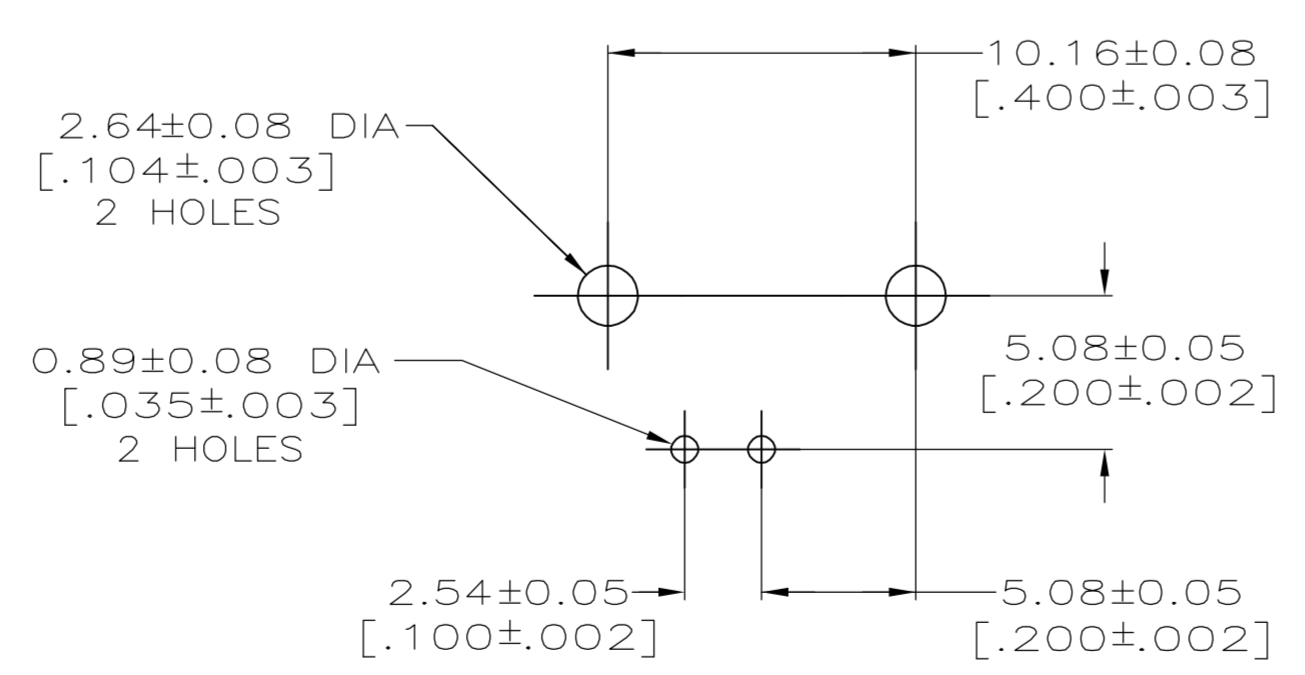
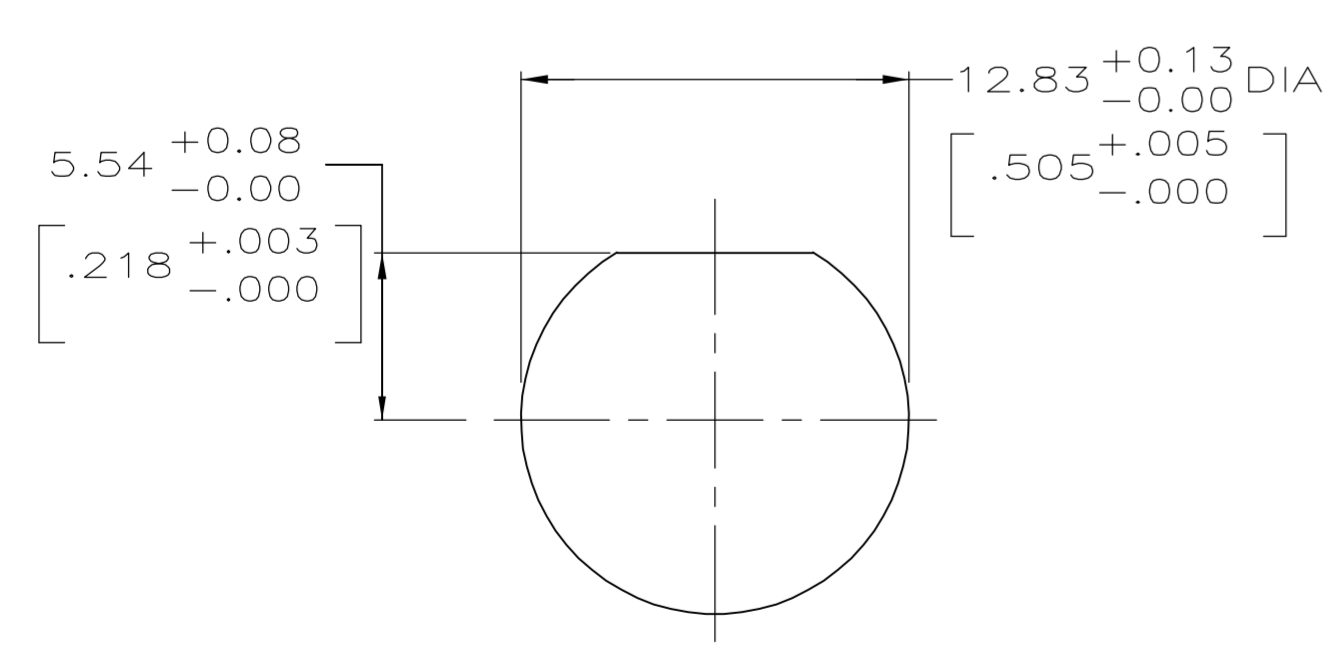
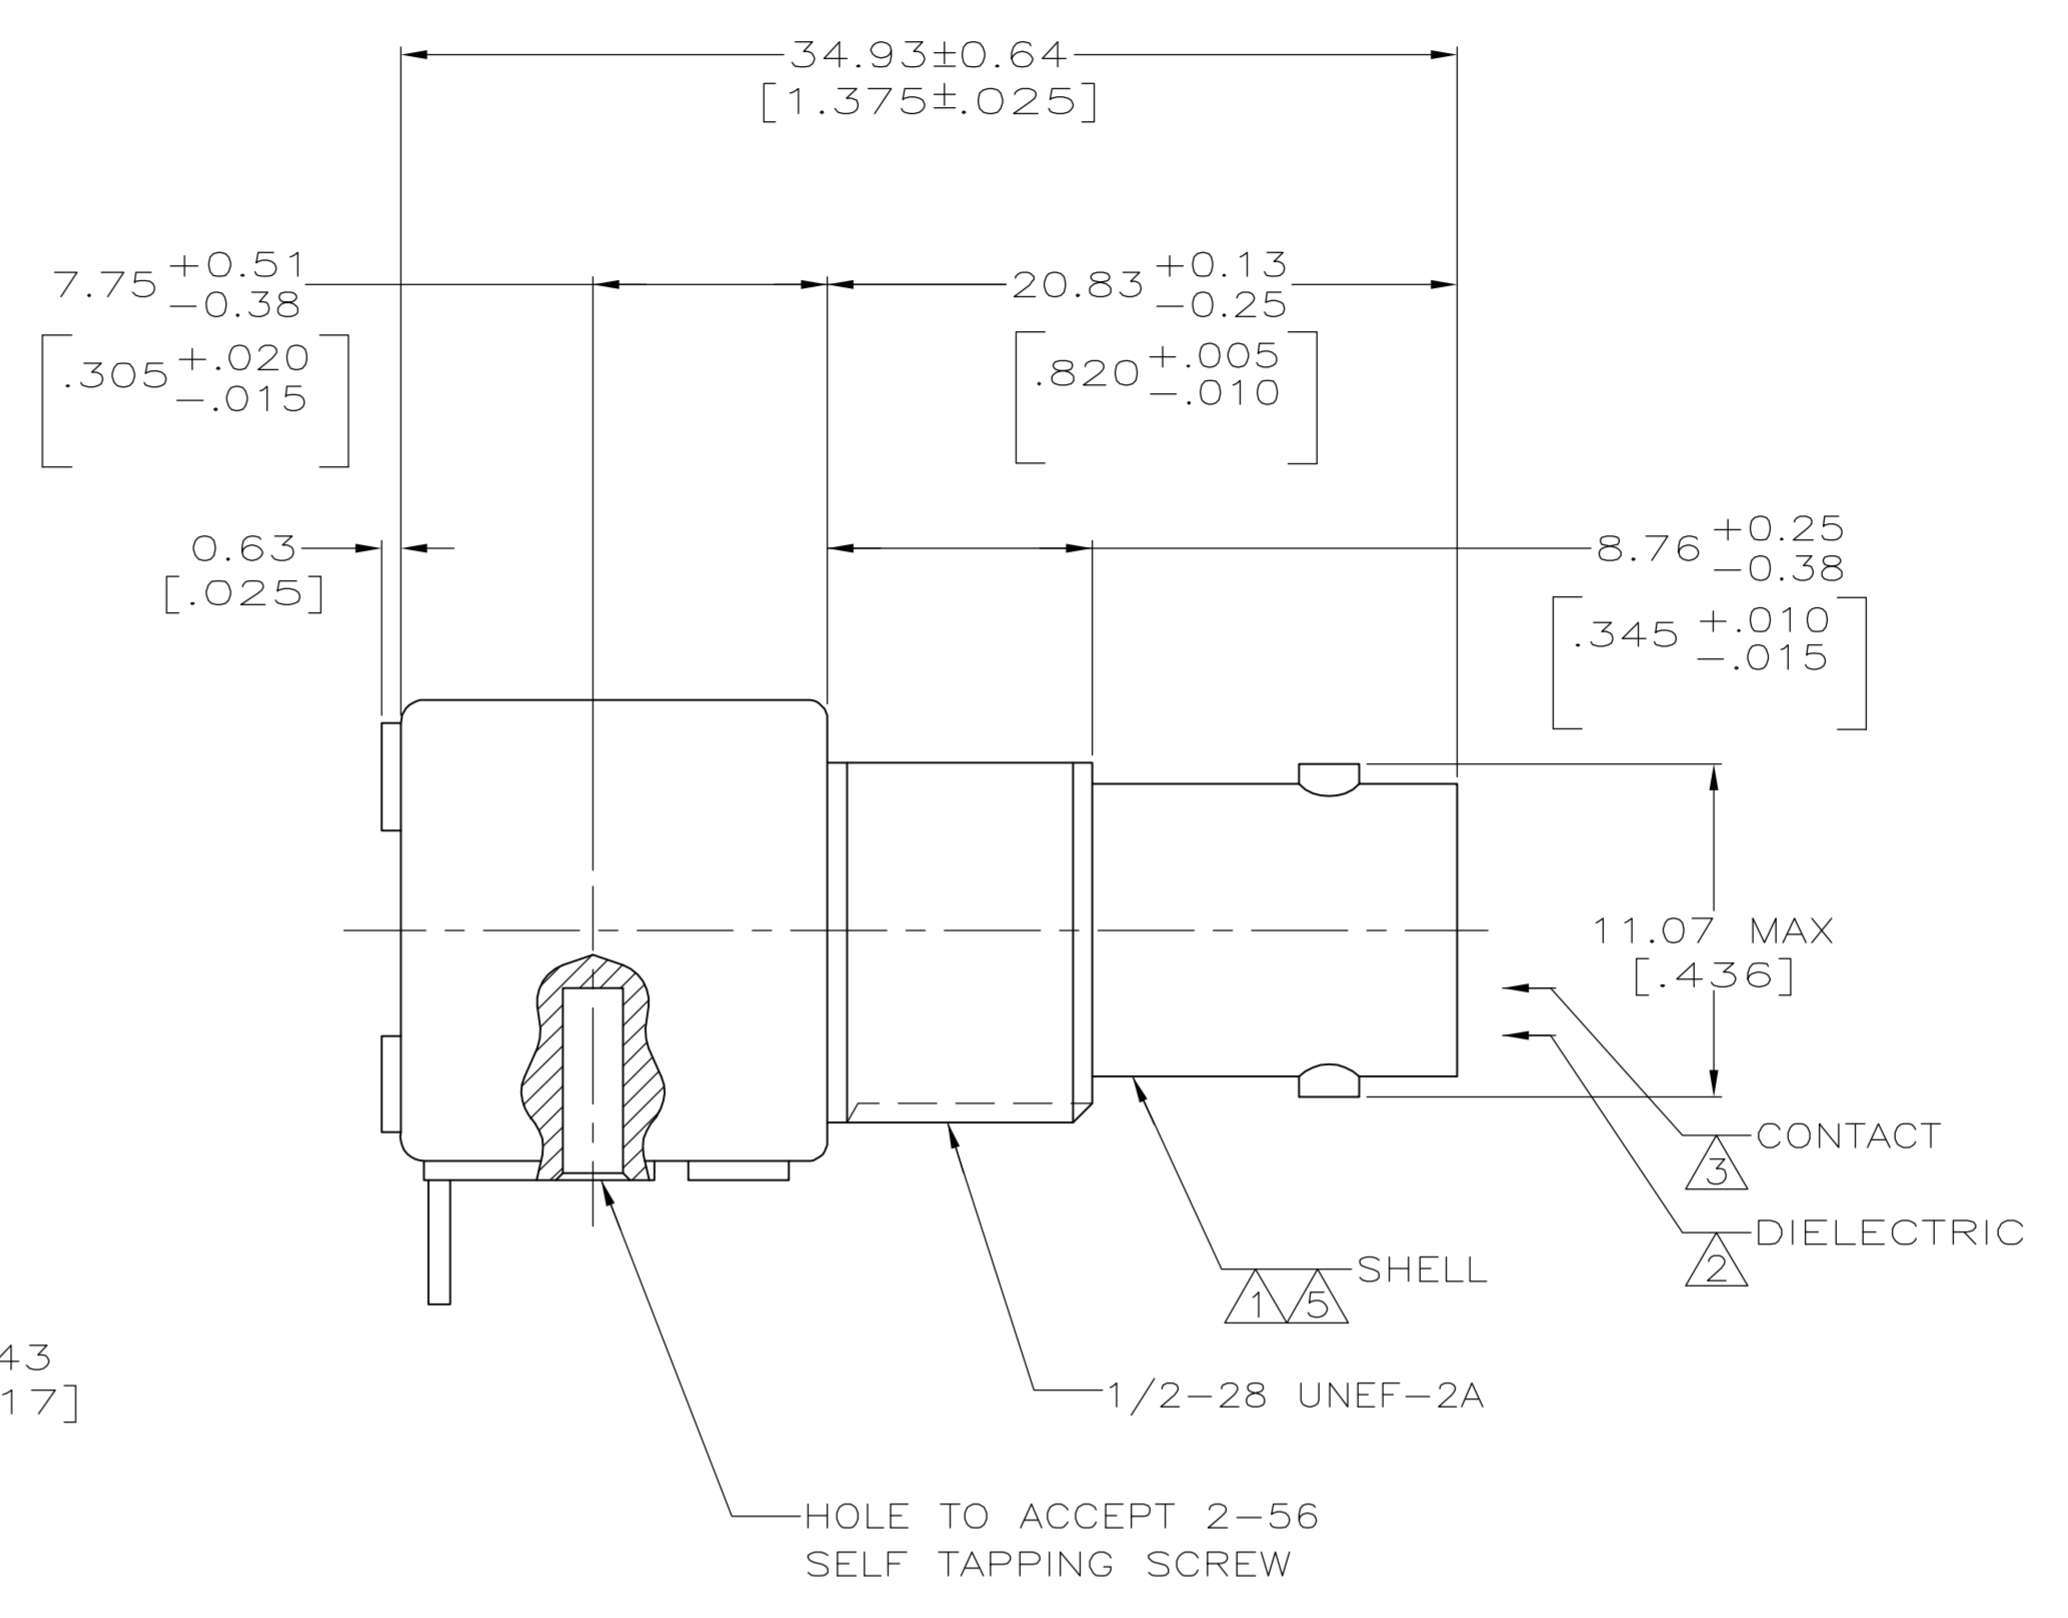


LOC		DIST		REVISIONS				
APV	DATE	DESCRIPTION	DATE	BY	APV			
AJ	16			D	REVISED PER EC OS14-0499-04	11JULY05	BM	JL

- 1 ZINC PER QQ-Z-363.
- 2 POLYMETHYLPENTENE, GENERAL PURPOSE.
- 3 BERYLLIUM COPPER PER QQ-C-530.
- 4 BRASS PER ASTM-B-453.
- 5 NICKEL PLATE PER QQ-N-290, 3.81μm [.000150] MINIMUM THICK.
- 6 TIN PLATE PER ASTM-B-545, 3.81μm [.000150] MINIMUM THICK.
- 7 GOLD PLATE PER MIL-G-45204, 0.76μm [.000030] MINIMUM THICK.
- 8 SILVER PLATE PER QQ-S-365, 2.54μm [.000100] MINIMUM THICK.
- 10. SEE INSTRUCTION SHEET 2769.

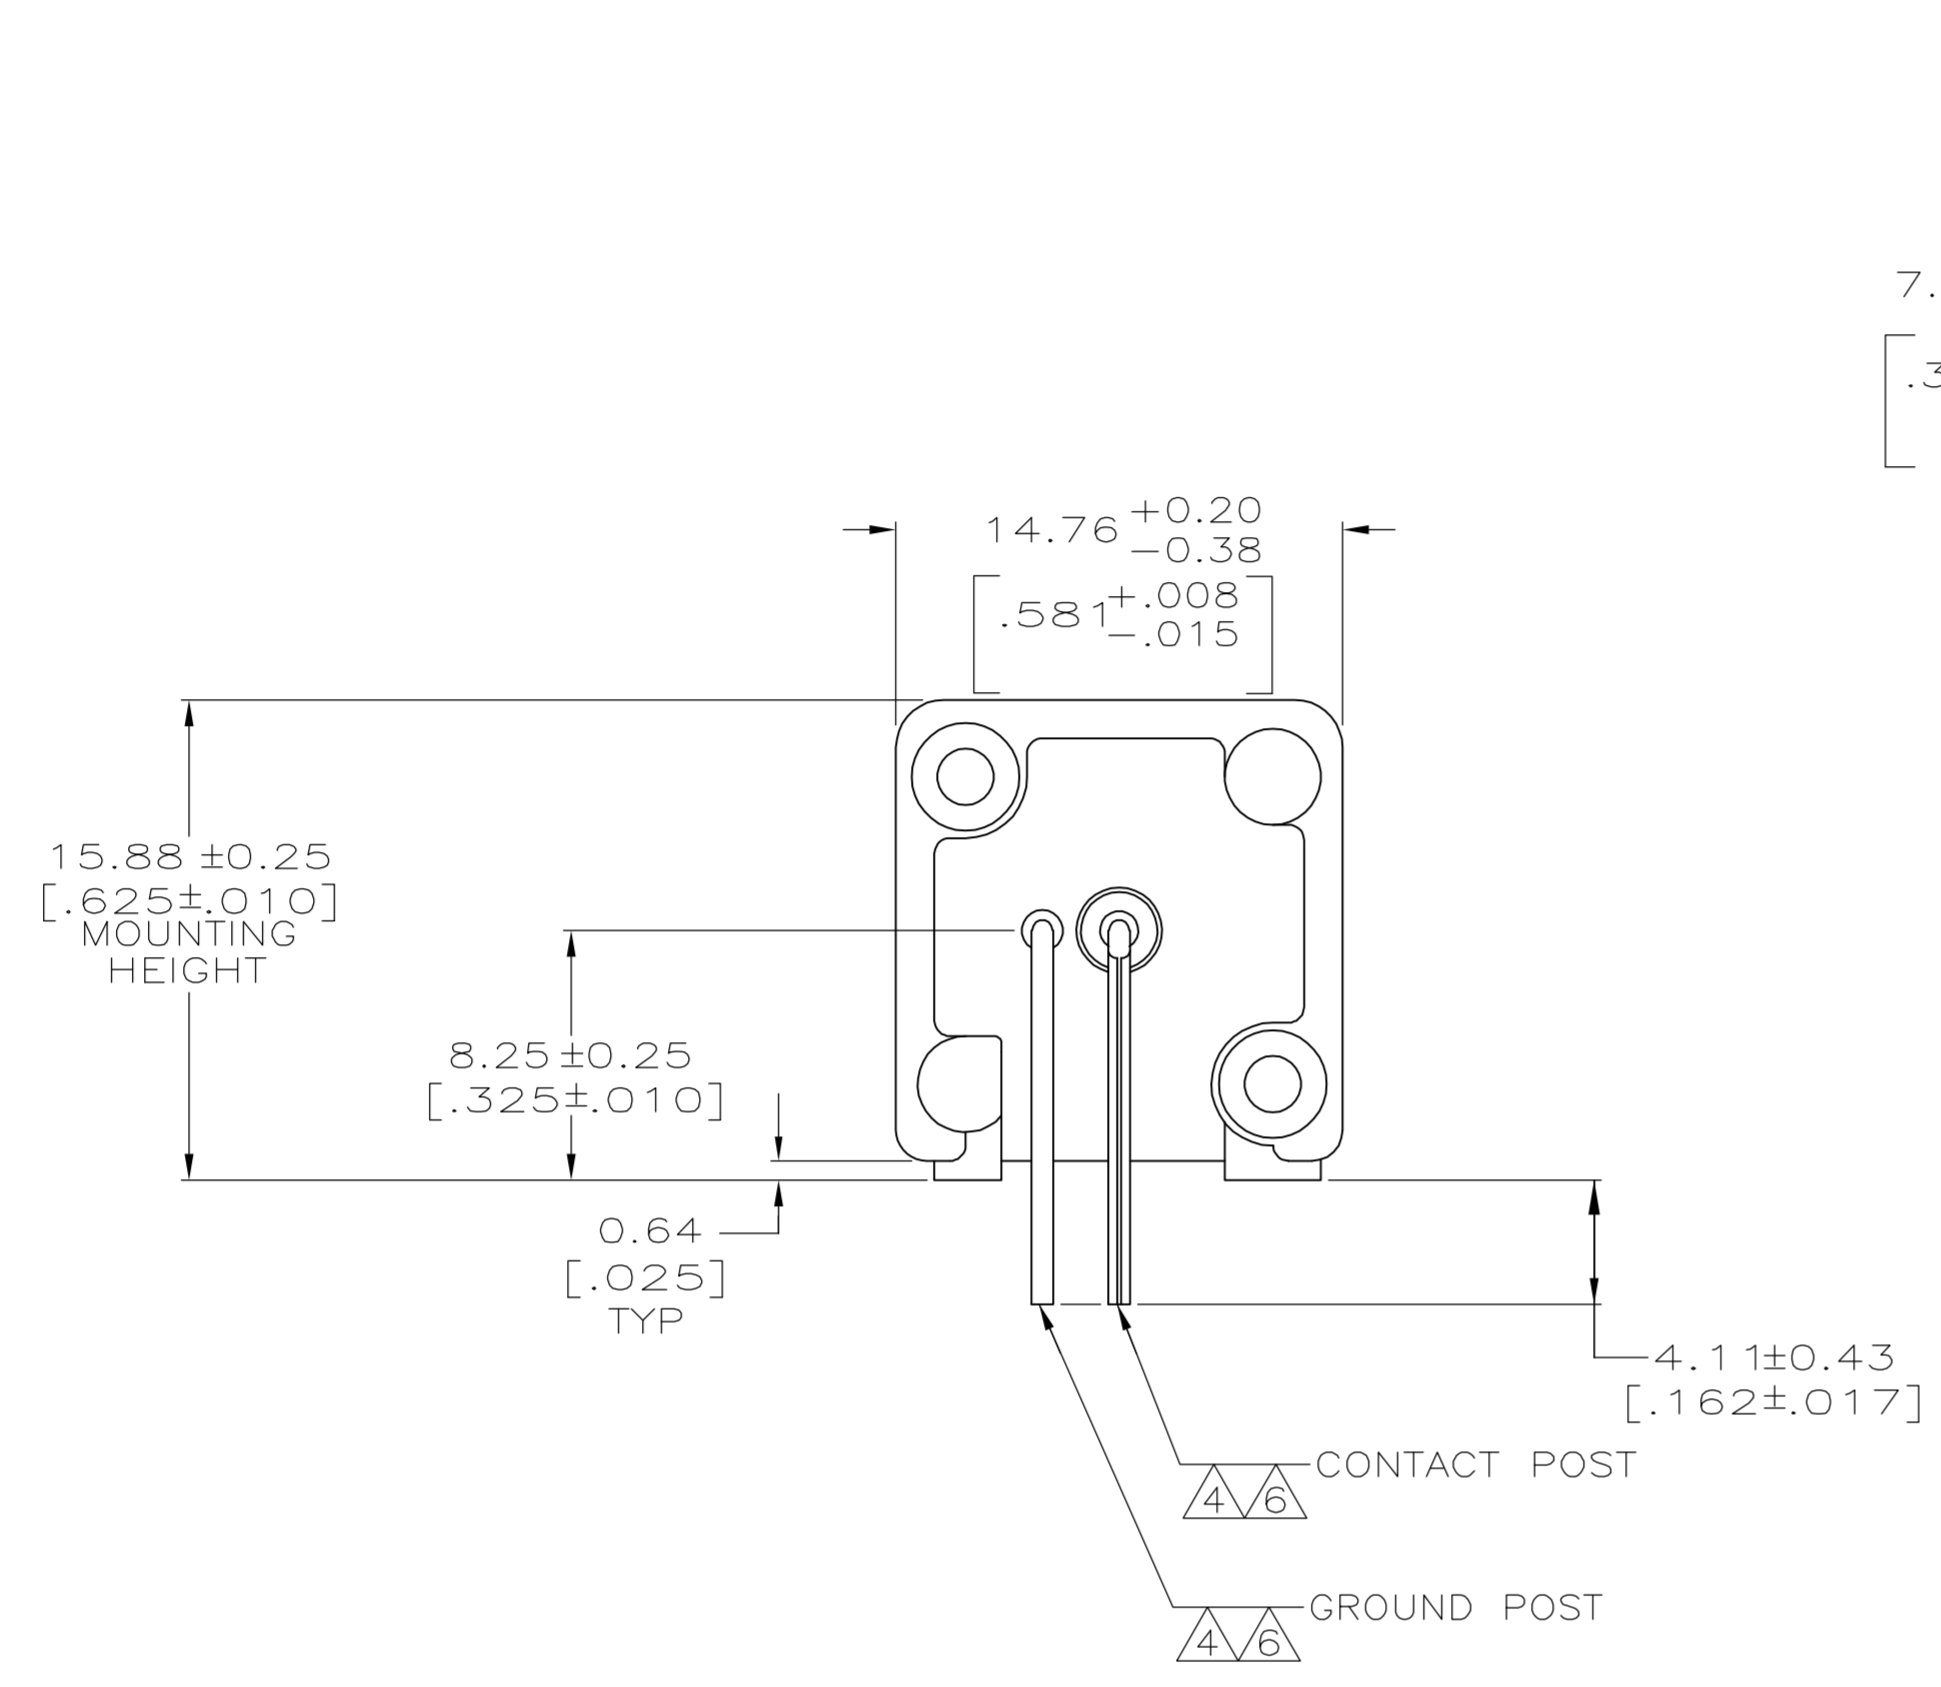

OBSELETE	222093-2
	222093-1
CONTACT FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN J. LIPPERT 2-19-92	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES		CIK A. GABANY 2-19-92	APV A. GABANY 2-19-92	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME JACK, RIGHT ANGLE, PCB 75 OHM, SERIES BNC		
0 PLC ± -	1 PLC ± -	2 PLC ± 0.20 [.008]	3 PLC ± -	4 PLC ± -
ANGLES ± -		APPLICATION SPEC		
MATERIAL SEE NOTES 1 THRU 4		FINISH SEE NOTES 5 THRU 8		RESTRICTED TO
CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 1	REV D