



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14	K	REV / 0720-0584-95	11APR95	MLE SB

<b>AMP</b> WIRE RANGE	E13288	LR7189 Certified
12-10 AWG SOLID OR STRANDED	12-10 AWG SOLID OR STRANDED	12-10 AWG SOLID OR STRANDED

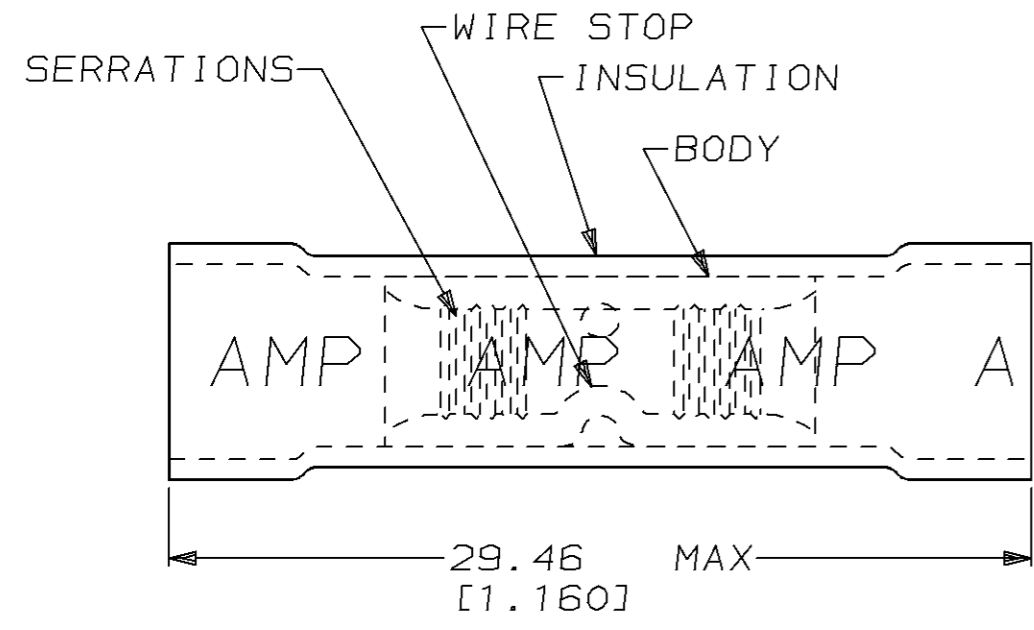

STYLE I

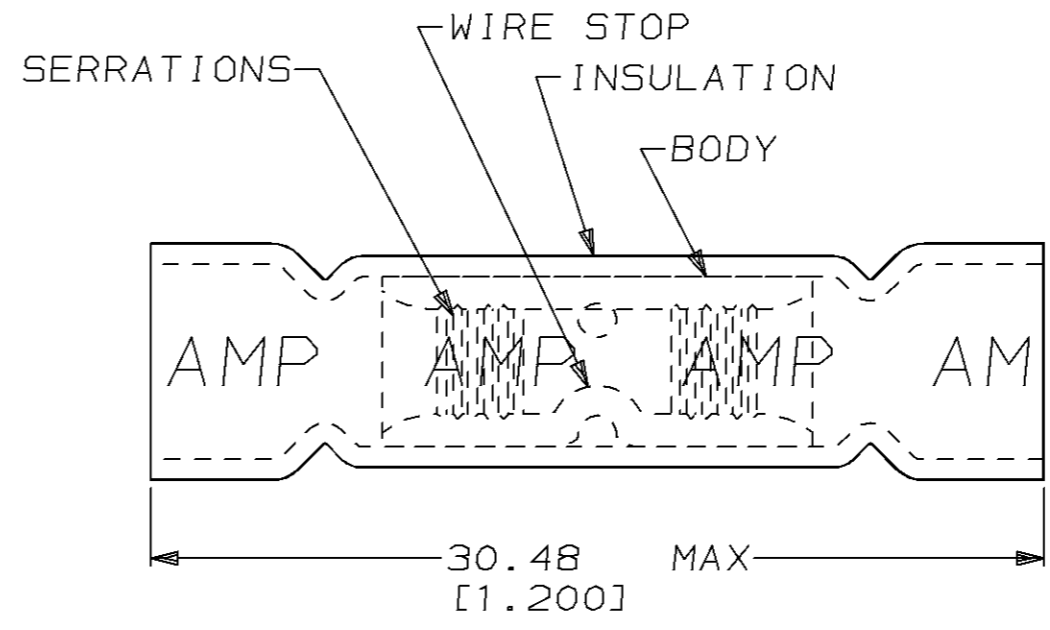

STYLE II

1. WIRE INSUL DIA,  
3.81-6.35 [.150-.250]

STYLE	QTY	PACKAGE TYPE	PART NO
I	50	LOOSE PIECE, BOX	8-34945-2
II	2000	ON TAPE, REEL	2-34945-2
II	500	LOOSE PIECE	2-34945-1
I	500	LOOSE PIECE	34945

AMP INCORPORATED CUSTOMER SERVICE SYSTEM		MAX RECOMMENDED OPERATING TEMPERATURE: 90°C [194°F]	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN M ELLIS 03APR95	<b>AMP</b> AMP Incorporated Harrisburg, PA 17105-3608
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752		DIMENSIONS: mm [in]	TOLERANCES UNLESS OTHERWISE SPECIFIED.	CHK C PRESNELL 03APR95	
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	VOLTAGE RATING: 600V MAX 1000V (FIXTURES OR SIGNS)		0 PLC ±-	APVD S BORTNER 03APR95	NAME SPLICE, BUTT, PLASTI-GRIP™, WIRE SIZE, 12-10 AWG
FOR ORDER ENTRY	1-800-526-5142	CIRCULAR MIL AREA: 2.62mm²-6.64mm² [5180-13100]		1 PLC ±-	PRODUCT SPEC UL486A	
			MATERIAL BODY, CU ASTM B 152 PVC, COLOR, YELLOW	2 PLC ±-	APPLICATION SPEC -	CAGE CODE 00779
				3 PLC ±-	WEIGHT -	DRAWING NO C-34945
				4 PLC ±-	CUSTOMER DRAWING	SCALE 4:1
				ANGLES ±-		SHEET 1 OF 1
				FINISH TIN PLATE PER MIL-T-10727		REV K