

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APV
	L4	REVISED PER ECR-25-244919	03JUL2025	AG	CK




1 OPERATING TEMPERATURE, 105°C MAX

2 RETENTION FORCE-16 OZ MIN INITIALLY,
6 OZ MIN AFTER 500 CYCLES.

 REFER TO MOUNTING HOLE PATTERN.


5 SINGLE LEG IS LIVE CIRCUIT

6 DOUBLE LEGS FOR MECHANICAL MOUNTING ONLY.

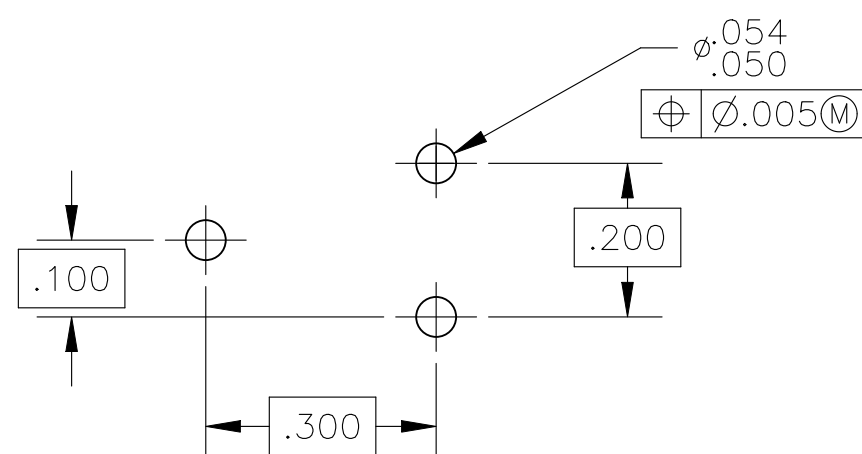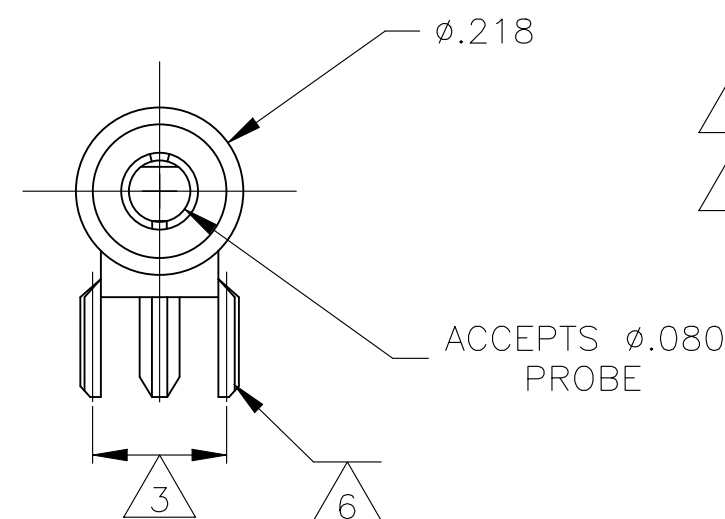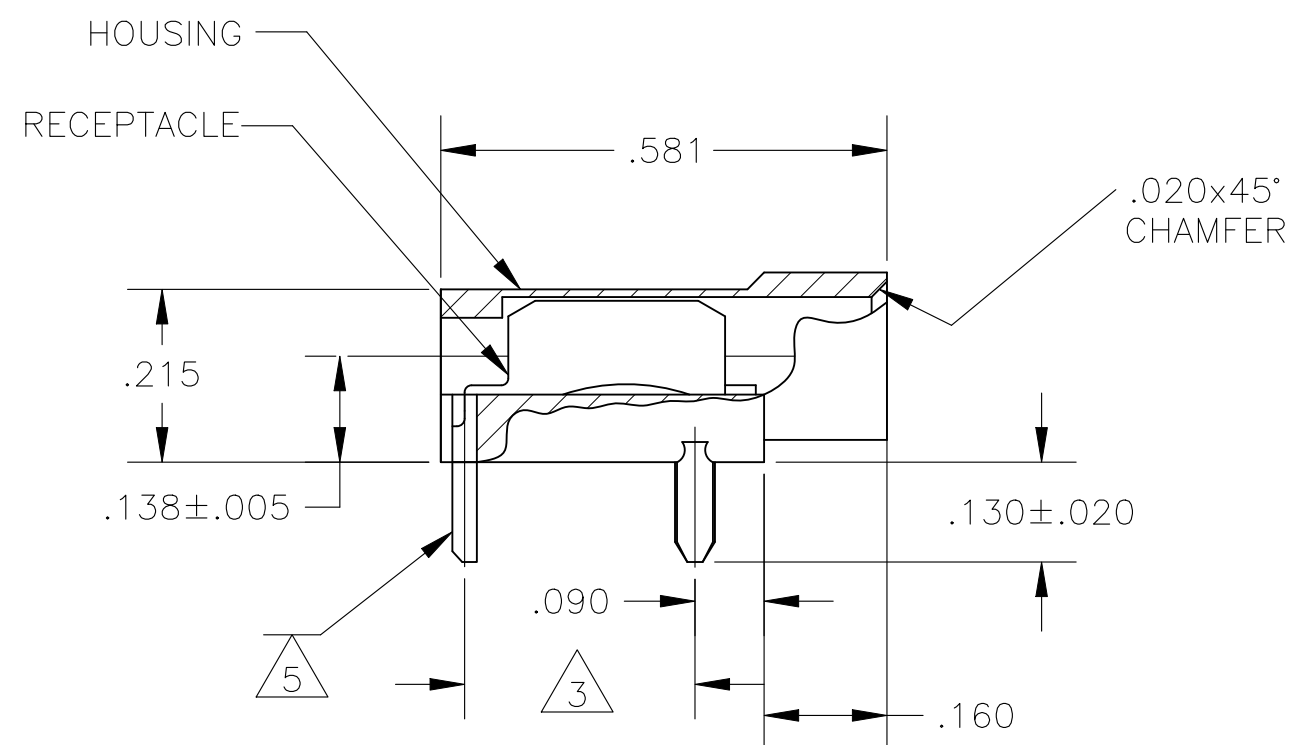

RECOMMENDED MOUNTING HOLE PATTERN

OBSOLETE	GOLD	WHITE	350180-9
OBSOLETE	GOLD	GRAY	350180-8
	GOLD	VIOLET	350180-7
OBSOLETE	GOLD	BLUE	350180-6
	GOLD	GREEN	350180-5
	GOLD	YELLOW	350180-4
	GOLD	ORANGE	350180-3
	GOLD	RED	350180-2
OBSOLETE	GOLD	BROWN	350180-1
	GOLD	BLACK	350180
	RECEPTACLE & LEGS FINISH	HOUSING COLOR	ASSY NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RAGHAVENDRA 11JUL2008		TE Connectivity							
DIMENSIONS: INCHES		CHK JEFF RUTH 11JUL2008									
		APVD ED HOWARD 11JUL2008		NAME							
		PRODUCT SPEC —		TEST PROBE ASSY							
MATERIAL HOUSING, NYLON TYPE 6/6 RECEPTACLE & LEGS, ASTM-B36 ALLOY6		APPLICATION SPEC —						SIZE			
		FINISH		WEIGHT 0.000000		CAGE CODE A300779		DRAWING NO C-350180		RESTRICTED T —	
CUSTOMER DRAWING				SCALE 4:1		SHEET 1 OF 1		REV 1		4	