

D

C

B

A




D

C

B

A

REVISIONS					
P	LTR	DESCRIPTION		DATE	DWN APVD
T		REVISED PER ECN-23-195747		27JAN2023	RK JO

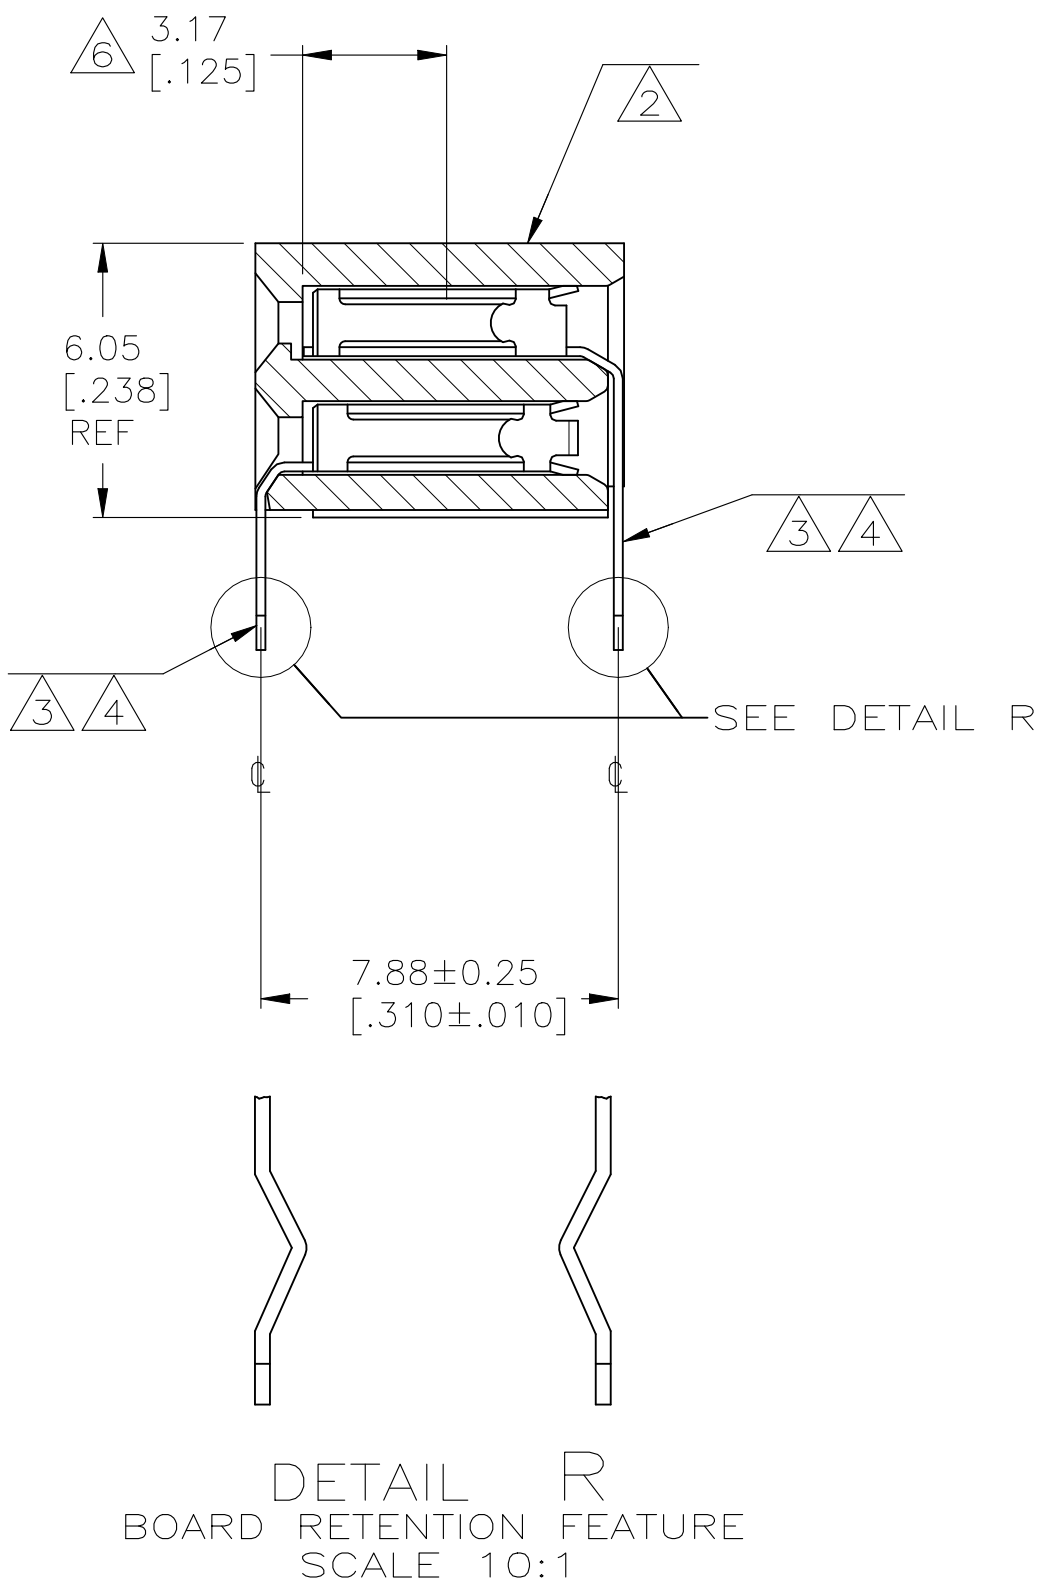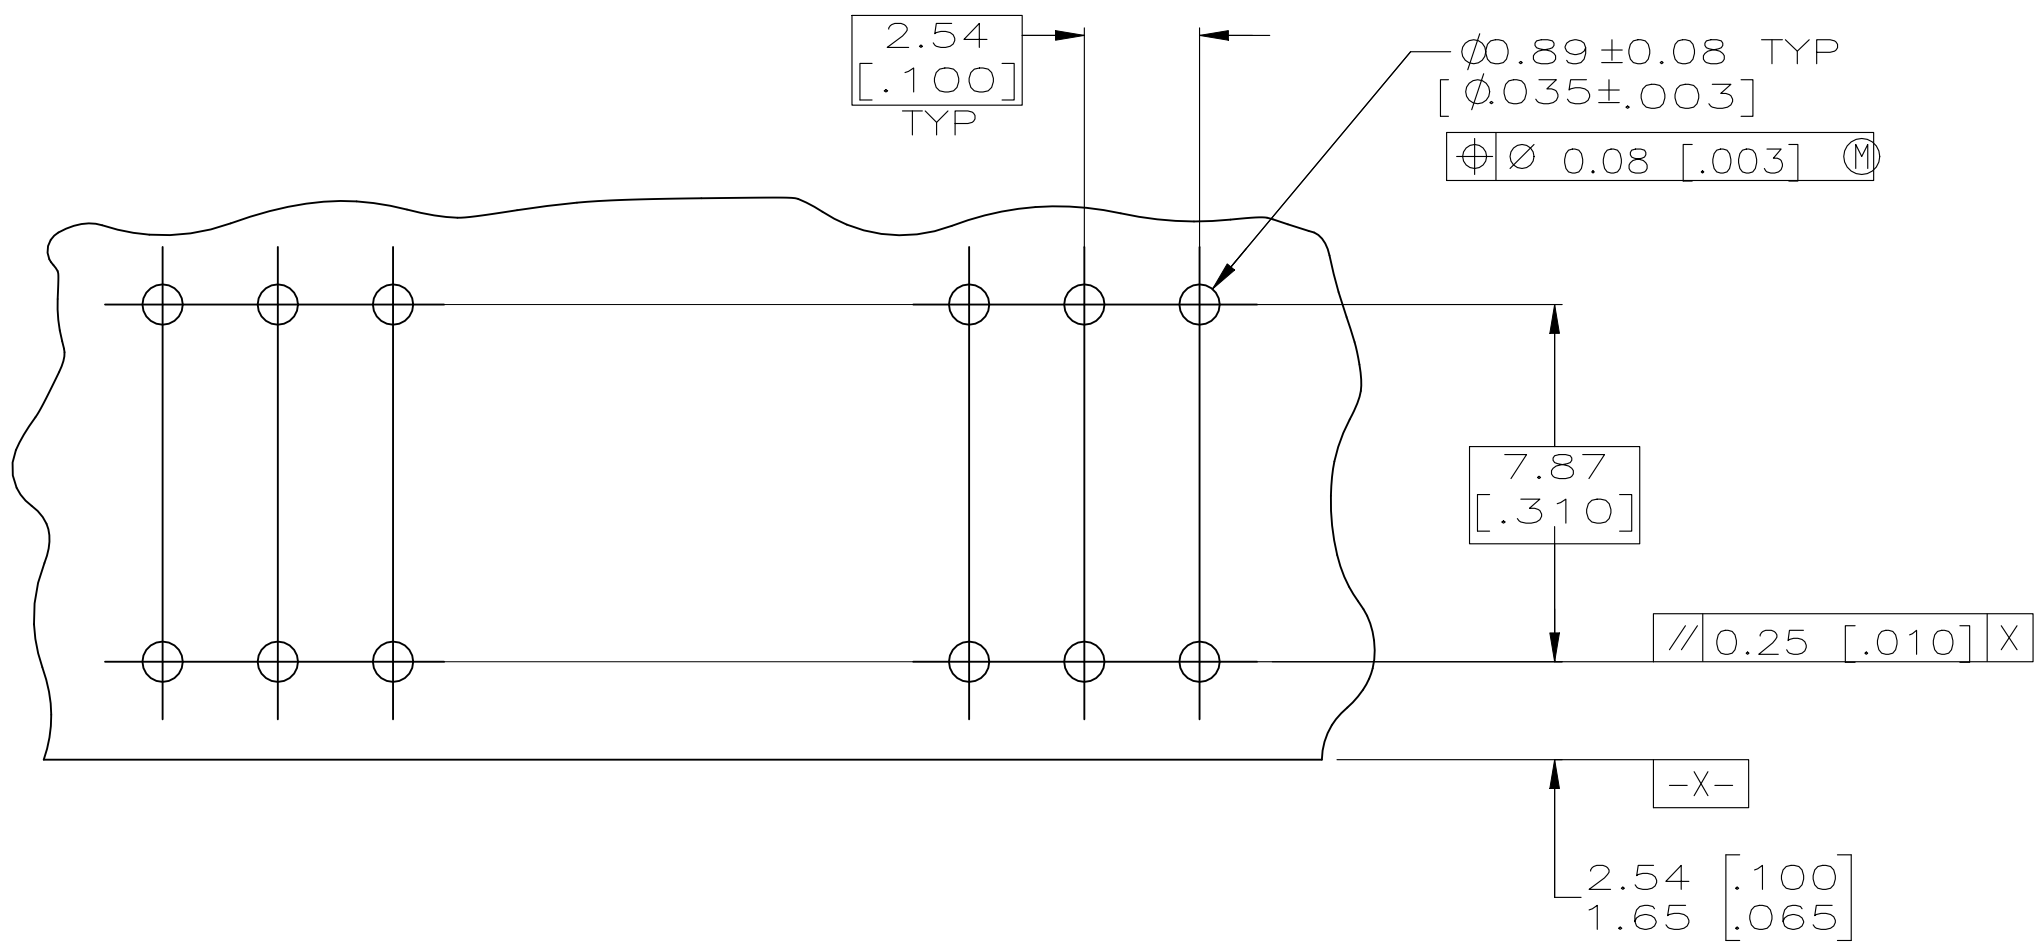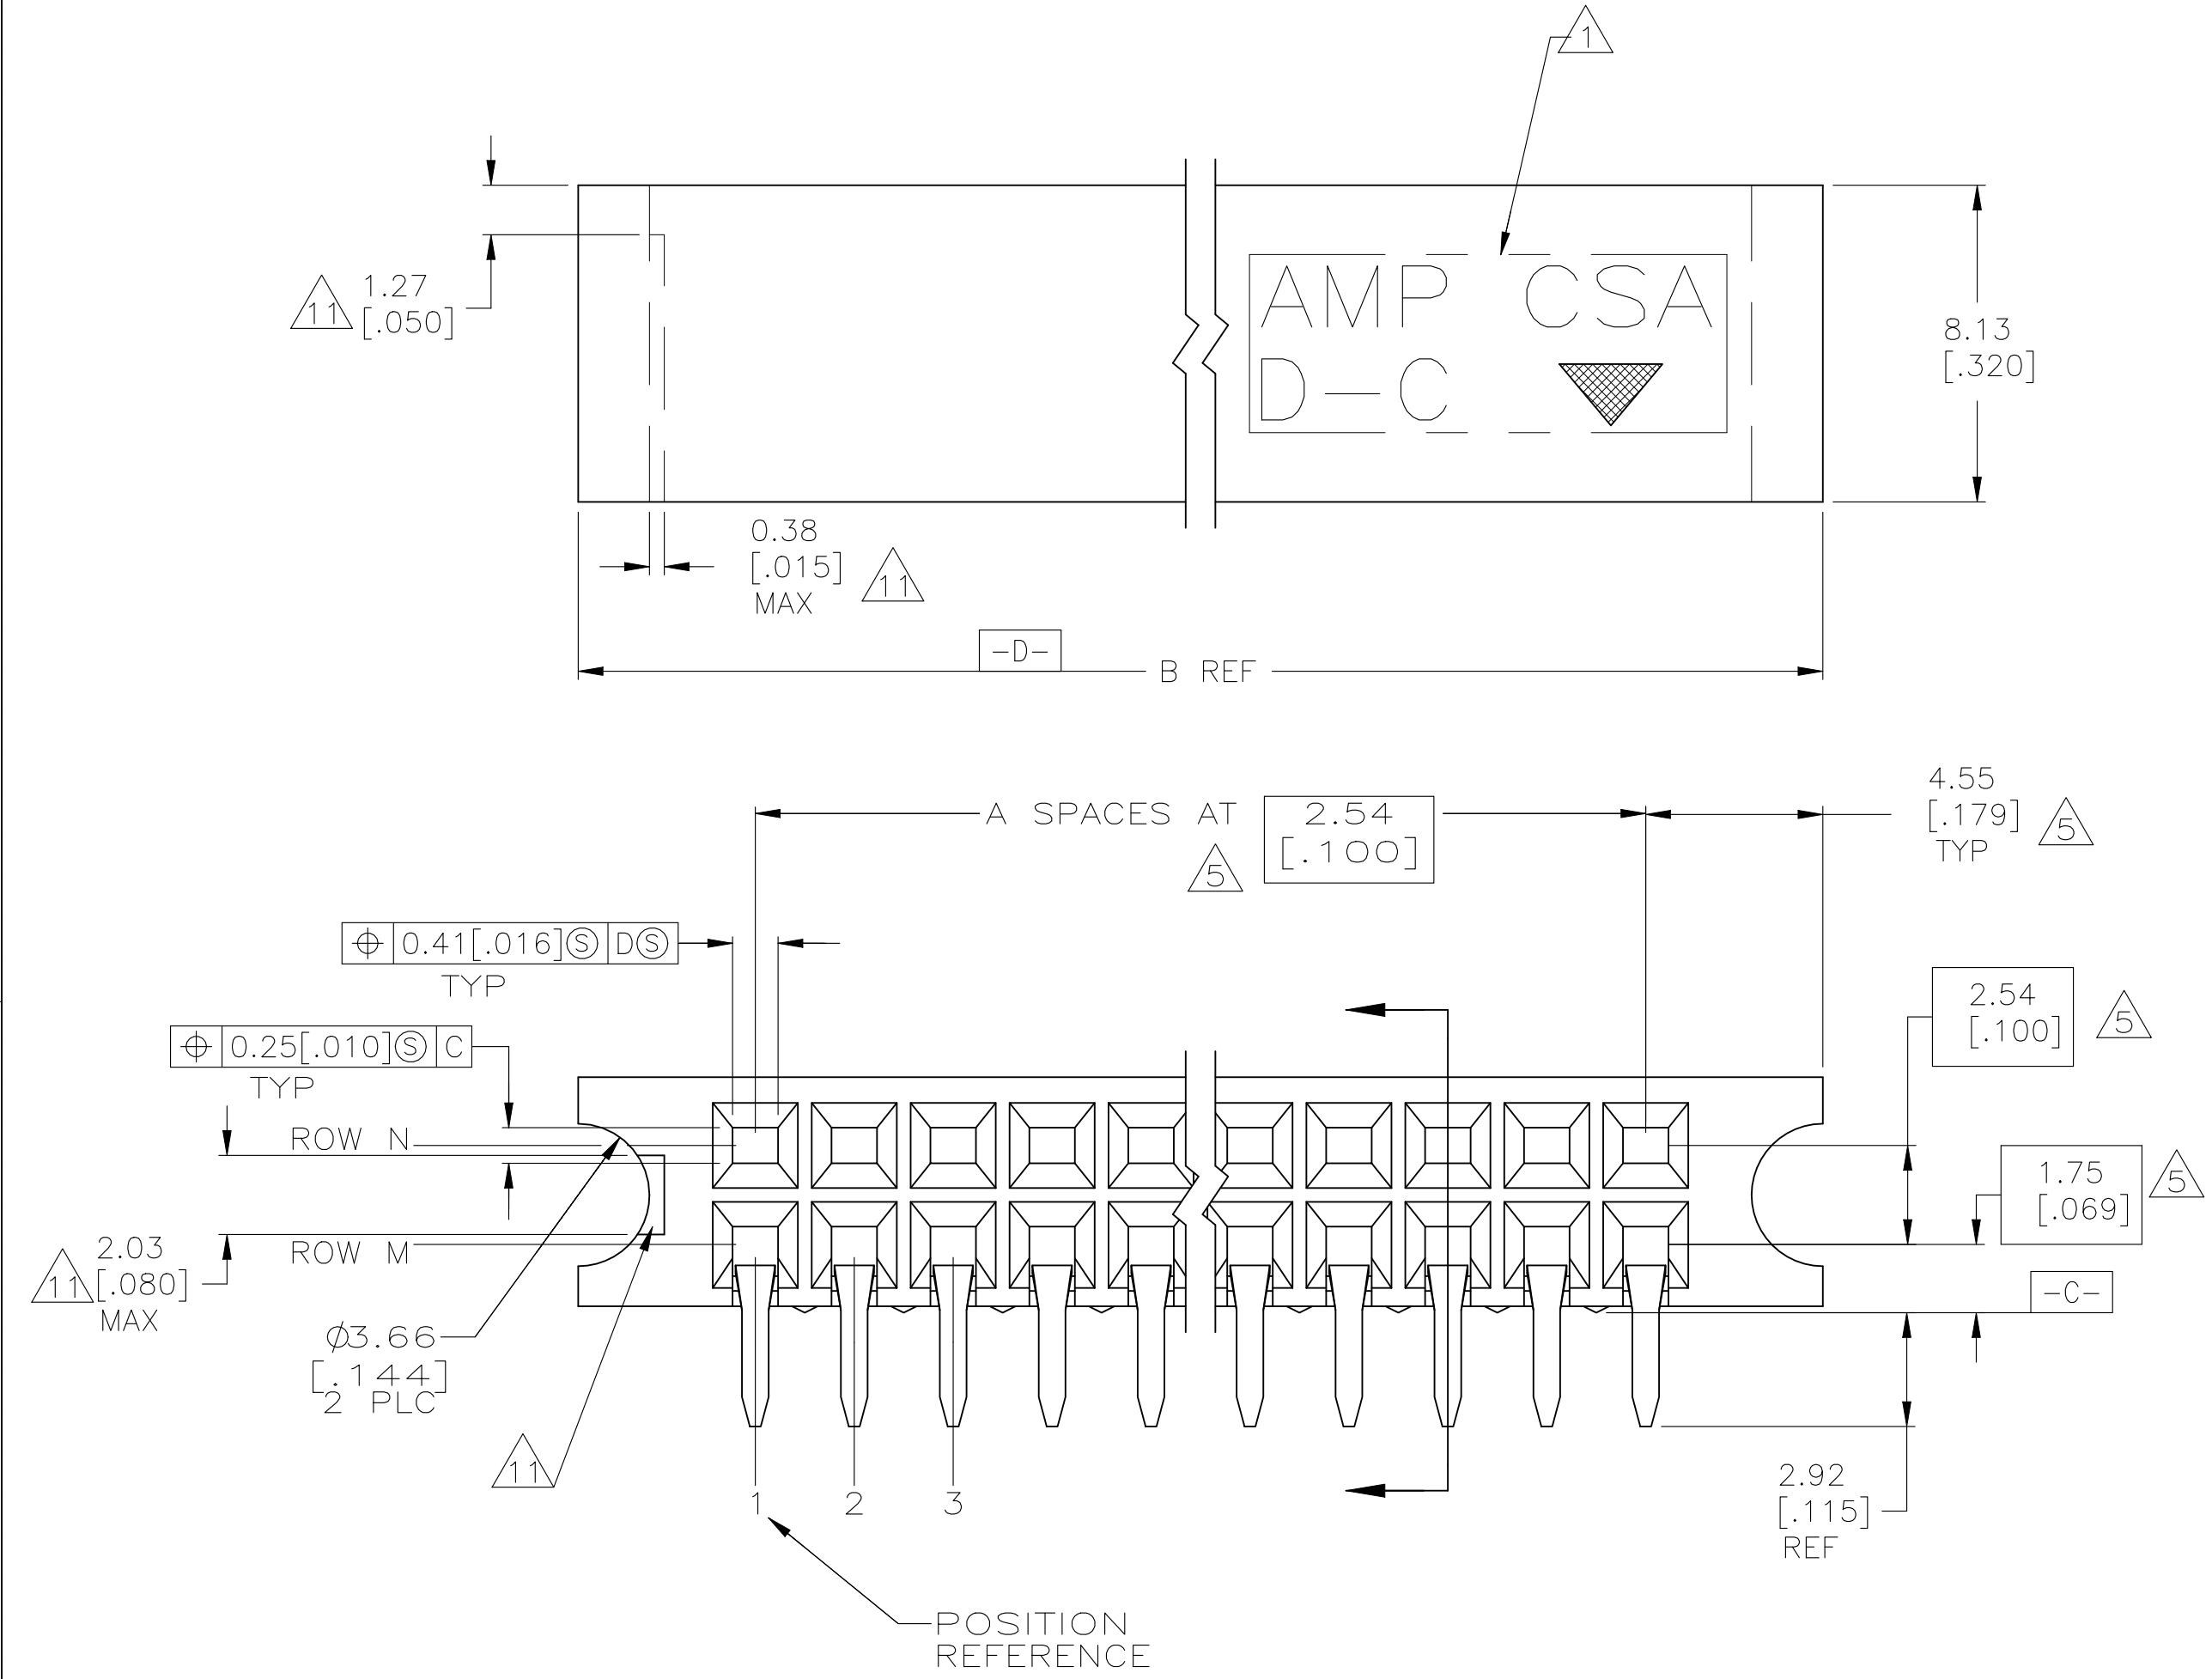

- 1 "AMP", "CSA", "▲" AND "DATE CODE" WITH .062 ±0.015 HIGH CHARACTERS WHERE SIZE PERMITS.

2 HOUSING: LCP MATERIAL.

3 CONTACT: PHOSPHOR BRONZE.

4 CONTACT FINISH: DUPLEX PLATED 0.00076 [0.00030] GOLD IN CONTACT AREA, 0.00127-0.00254 [0.00050-0.00100] BRIGHT TIN-LEAD ON SOLDER TAILS, ALL OVER 0.00127 [0.00050] NICKEL.

5 THESE DIMENSIONS PERTAIN TO CAVITY ⌀'S ONLY, NOT TO CONTACT LOCATIONS.

6 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE CONTACT BEAMS).

7. CSA LOGO INK STAMPED WHITE ON HOUSING.
- 8 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION

9 CONTACT FINISH: DUPLEX PLATED 0.00076 [0.00030] GOLD IN CONTACT AREA, 0.00127-0.00254 [0.00050-0.00100] MATTE TIN ON SOLDER TAILS, ALL OVER 0.00127 [0.00050] NICKEL.

10 ROHS 2002/95/EC COMPLIANT.

11 RECESSED AREA AROUND MOLD GATE IS OPTIONAL. THIS FEATURE IS ALLOWABLE ON EITHER SIDE OF HOUSING OR MAY NOT BE PRESENT AT ALL.

12 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

12	OBSOLETE	1, 4	1, 4	16.71 [0.658]	3	8	7-534204-2
12	OBSOLETE	1, 3	1, 3	14.17 [0.558]	2	6	7-534204-1
12	OBSOLETE	1, 2, 50, 51, 99, 100	1, 2, 50, 51, 99, 100	260.55 [10.258]	99	200	7-534204-0
12	OBSOLETE	1, 2, 40, 41, 79, 80	1, 2, 40, 41, 79, 80	209.75 [8.258]	79	160	6-534204-9
12	OBSOLETE	1, 2, 35, 36, 69, 70	1, 2, 35, 36, 69, 70	184.35 [7.258]	69	140	6-534204-8
12	OBSOLETE	1, 2, 32, 33, 64, 65	1, 2, 32, 33, 64, 65	171.65 [6.758]	64	130	6-534204-7
12	OBSOLETE	1, 2, 27, 28, 54, 55	1, 2, 27, 28, 54, 55	146.25 [5.758]	54	110	6-534204-6
12	OBSOLETE	1, 2, 47, 48	1, 2, 47, 48	128.47 [5.058]	47	96	6-534204-5
12	OBSOLETE	1, 2, 35, 36	1, 2, 35, 36	97.99 [3.858]	35	72	6-534204-4
12	OBSOLETE	1, 2, 34, 35	1, 2, 34, 35	95.45 [3.758]	34	70	6-534204-3
12	OBSOLETE	1, 2, 19, 20	1, 2, 19, 20	57.35 [2.258]	19	40	6-534204-2
12	OBSOLETE	1, 2, 11, 12	1, 2, 11, 12	37.03 [1.458]	11	24	6-534204-1
12	OBSOLETE	1, 2, 7, 8	1, 2, 7, 8	26.87 [1.058]	7	16	6-534204-0
12	OBSOLETE	1, 2, 9, 10	1, 2, 9, 10	31.95 [1.258]	9	20	5-534204-9
12	OBSOLETE	1, 2, 39, 40	1, 2, 39, 40	108.15 [4.258]	39	80	5-534204-8
12	OBSOLETE	1, 2, 30, 31, 59, 60	1, 2, 30, 31, 59, 60	158.95 [6.258]	59	120	5-534204-7
12	OBSOLETE	1, 2, 25, 26, 49, 50	1, 2, 25, 26, 49, 50	133.55 [5.258]	49	100	5-534204-6
12	OBSOLETE	1, 2, 29, 30	1, 2, 29, 30	82.75 [3.258]	29	60	5-534204-5
12	OBSOLETE	1, 2, 14, 15	1, 2, 14, 15	44.65 [1.758]	14	30	5-534204-4
12	OBSOLETE	1, 2, 17, 18	1, 2, 17, 18	52.27 [2.058]	17	36	5-534204-3
12	OBSOLETE	1, 2, 5, 6	1, 2, 5, 6	21.79 [0.858]	5	12	5-534204-2
12	OBSOLETE	1, 2, 24, 25	1, 2, 24, 25	70.05 [2.758]	24	50	5-534204-1
4		1, 4	1, 4	16.71 [0.658]	3	8	2-534204-2
4		1, 3	1, 3	14.17 [0.558]	2	6	2-534204-1
12	OBSOLETE	1, 2, 50, 51, 99, 100	1, 2, 50, 51, 99, 100	260.55 [10.258]	99	200	2-534204-0
12	OBSOLETE	1, 2, 40, 41, 79, 80	1, 2, 40, 41, 79, 80	209.75 [8.258]	79	160	1-534204-9
12	OBSOLETE	1, 2, 35, 36, 69, 70	1, 2, 35, 36, 69, 70	184.35 [7.258]	69	140	1-534204-8
12	OBSOLETE	1, 2, 32, 33, 64, 65	1, 2, 32, 33, 64, 65	171.65 [6.758]	64	130	1-534204-7
12	OBSOLETE	1, 2, 27, 28, 54, 55	1, 2, 27, 28, 54, 55	146.25 [5.758]	54	110	1-534204-6
12	OBSOLETE	1, 2, 47, 48	1, 2, 47, 48	128.47 [5.058]	47	96	1-534204-5
12	OBSOLETE	1, 2, 35, 36	1, 2, 35, 36	97.99 [3.858]	35	72	1-534204-4
12	OBSOLETE	1, 2, 34, 35	1, 2, 34, 35	95.45 [3.758]	34	70	1-534204-3
12	OBSOLETE	1, 2, 19, 20	1, 2, 19, 20	57.35 [2.258]	19	40	1-534204-2
12	OBSOLETE	1, 2, 11, 12	1, 2, 11, 12	37.03 [1.458]	11	24	1-534204-1
12	OBSOLETE	1, 2, 7, 8	1, 2, 7, 8	26.87 [1.058]	7	16	1-534204-0
12	OBSOLETE	1, 2, 9, 10	1, 2, 9, 10	31.95 [1.258]	9	20	534204-9
12	OBSOLETE	1, 2, 39, 40	1, 2, 39, 40	108.15 [4.258]	39	80	534204-8
12	OBSOLETE	1, 2, 30, 31, 59, 60	1, 2, 30, 31, 59, 60	158.95 [6.258]	59	120	534204-7
12	OBSOLETE	1, 2, 25, 26, 49, 50	1, 2, 25, 26, 49, 50	133.55 [5.258]	49	100	534204-6
12	OBSOLETE	1, 2, 29, 30	1, 2, 29, 30	82.75 [3.258]	29	60	534204-5
12	OBSOLETE	1, 2, 14, 15	1, 2, 14, 15	44.65 [1.758]	14	30	534204-4
12	OBSOLETE	1, 2, 17, 18	1, 2, 17, 18	52.27 [2.058]	17	36	534204-3
12	OBSOLETE	1, 2, 5, 6	1, 2, 5, 6	21.79 [0.858]	5	12	534204-2
12	OBSOLETE	1, 2, 24, 25	1, 2, 24, 25	70.05 [2.758]	24	50	534204-1
FINISH		ROW M	ROW N	B	A	NO OF POSN	PART NUMBER
		POSITION WITH BOARD RETENTION					

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± 0.13 [0.005]

3 PLC ± -

4 PLC ± -

ANGLES ± -

MATERIAL

23

SEE TABLE

DWN T. HOFFMAN 4/29/96

CHK A. GABANY 5/7/96

APVD -

NAME

PRODUCT SPEC

APPLICATION SPEC

WEIGHT -

CUSTOMER DRAWING

TE Connectivity

RCPT ASSY, MOD II, DBL ROW, 2.54 X 2.54 [0.100 X .100] CL, GUIDE PIN EARS

SIZE CAGE CODE DRAWING NO

A100779534204

RESTRICTED TO

SCALE 6:1

SHEET 1 OF 1

REV T

4805 (1/15)