

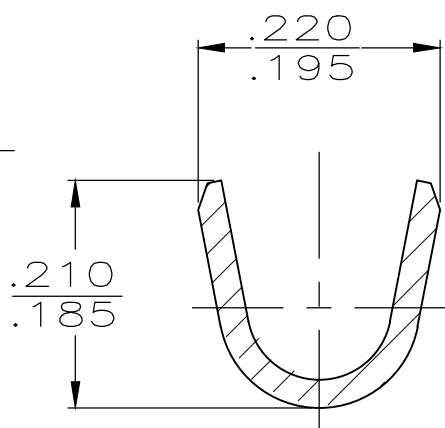


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50	P6	REVISED PER ECR-19-008121	27MAY2019	BDA GG

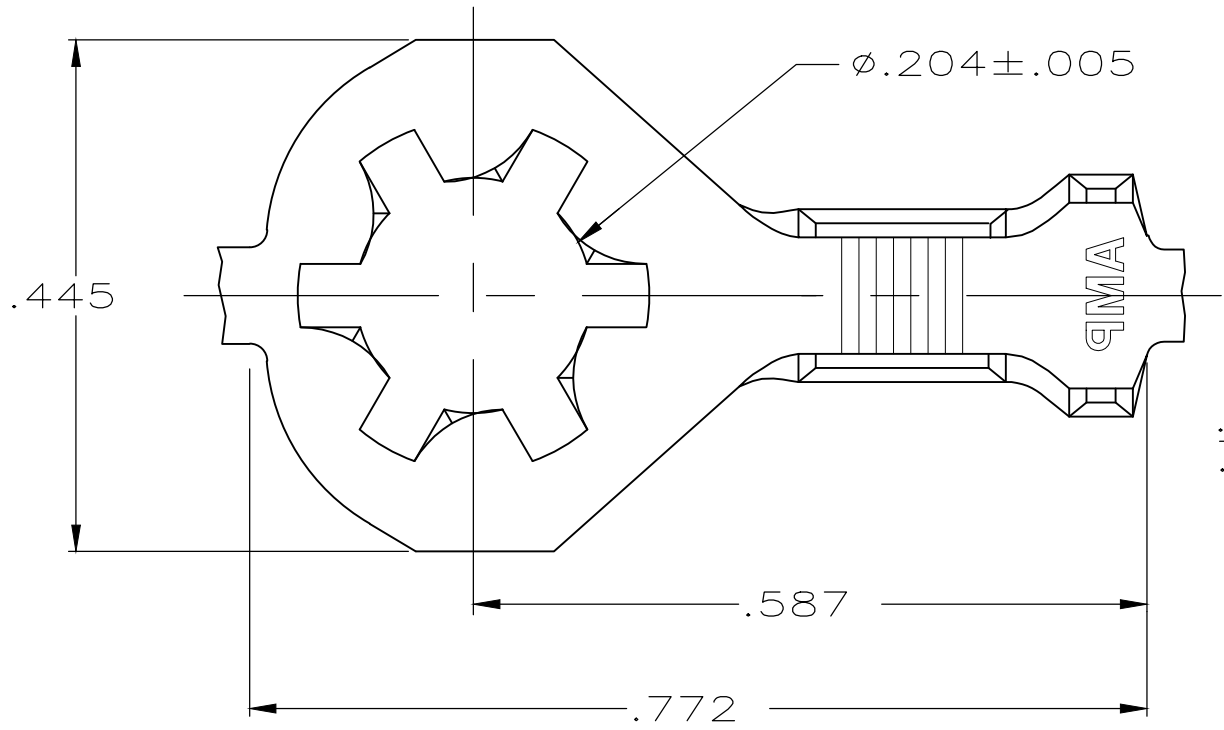

SECTION C-C

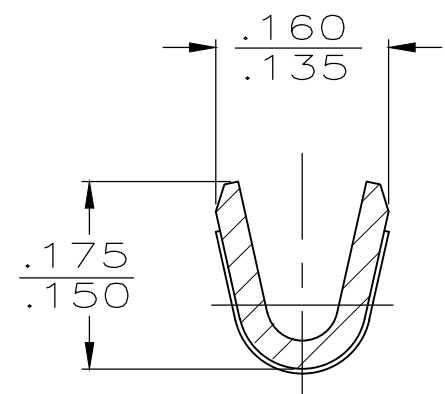

SECTION B-B

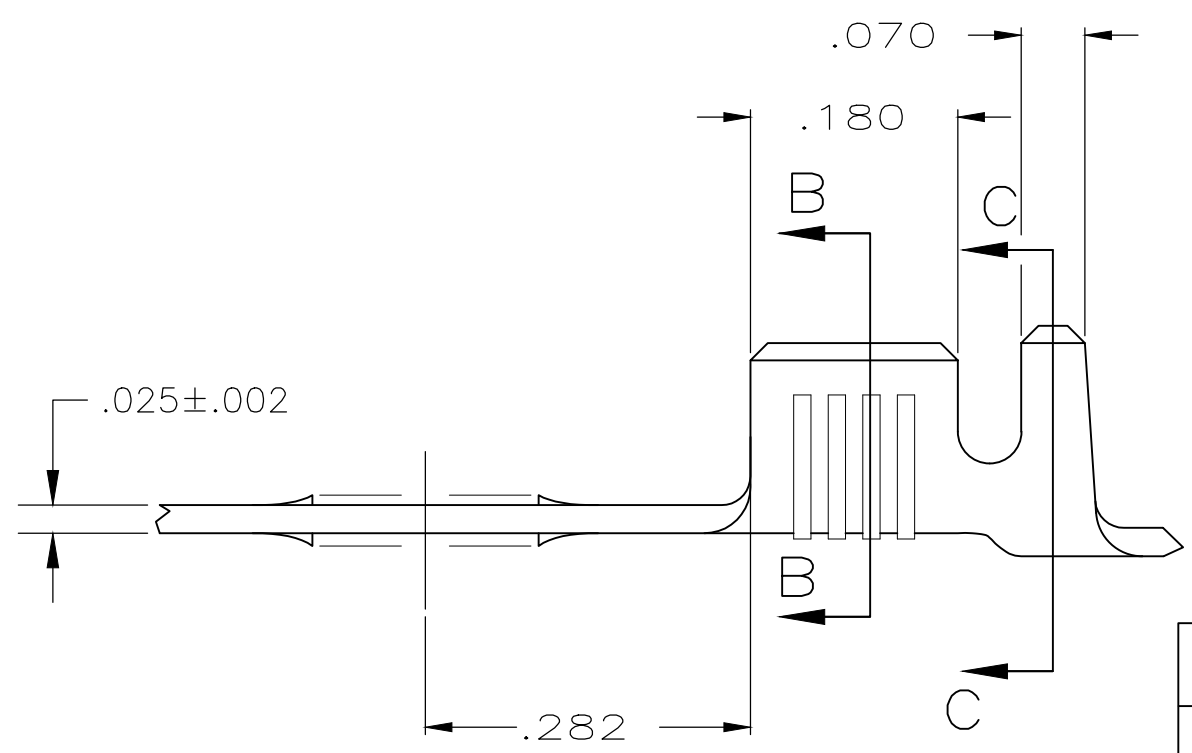

- 1 CONTINUOUS STRIP ON REELS
- 2 TIN PLATING.
- 3 WIRE SIZE IS #18-#14 AWG
- 4 INSULATION RANGE IS .105-.145 DIA
- 5 INTERLEAVING PAPER
- 6 OBSOLETE PARTS
- 7 50μin OF NICKEL UNDERPLATING AND 150 TO 300μin OF TIN PLATING

FINISH	MATERIAL	PART NO.
7 2	H04 BRASS	1-61795-1
5	MADE FROM 61795-3	1-61795-0
5	MADE FROM 61795-1	61795-9
6 5	T2 STEEL	61795-7
2	H04 BRASS	61795-6
2	H04 BRASS	61795-3
6		61795-2
2	T2 STEEL	61795-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 5/15/87 D HOLLINGSWORTH	STE TE Connectivity	
		CHK 11/23/87 G YETTER		
		APVD 12/2/87 R FRANTZ	NAME	
DIMENSIONS: INCHES		PRODUCT SPEC		RING
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC		
MATERIAL SEE TABLE		WEIGHT -		RESTRICTED TO -
FINISH SEE TABLE		CUSTOMER DRAWING		SCALE 6:1
		SIZE A3	CAGE CODE 00779	DRAWING NO C-61795
				SHEET 1 OF 1
				REV P6