


POS.	L <sup>+0.3</sup> <sub>-0.5</sub>	PART-NO.
-	-	-
2	5.08	825437-2
3	7.62	825437-3
4	10.16	825437-4
5	12.70	825437-5
6	15.24	825437-6
7	17.78	825437-7
8	20.32	825437-8
9	22.86	<del>825437-9</del>
10	25.40	1-825437-0
11	27.94	1-825437-1
12	30.48	1-825437-2
13	33.02	1-825437-3
14	35.56	1-825437-4
15	38.10	1-825437-5
16	40.64	1-825437-6
17	43.18	1-825437-7
18	45.72	1-825437-8
19	48.26	1-825437-9
20	50.80	2-825437-0
21	53.34	<del>2-825437-1</del>
22	55.88	<del>2-825437-2</del>
23	58.42	<del>2-825437-3</del>
24	60.96	2-825437-4
25	63.50	2-825437-5
26	66.04	2-825437-6
27	68.58	<del>2-825437-7</del>
28	71.12	2-825437-8
29	73.66	<del>2-825437-9</del>
30	76.20	3-825437-0
31	78.74	3-825437-1
32	81.28	<del>3-825437-2</del>
33	83.82	<del>3-825437-3</del>
34	86.36	<del>3-825437-4</del>
35	88.90	<del>3-825437-5</del>
36	91.44	3-825437-6
37	93.98	<del>3-825437-7</del>
38	96.52	<del>3-825437-8</del>
39	99.06	<del>3-825437-9</del>
40	101.60	4-825437-0
41	104.14	<del>4-825437-1</del>
42	106.68	<del>4-825437-2</del>
43	109.22	<del>4-825437-3</del>
44	111.76	<del>4-825437-4</del>
45	114.30	<del>4-825437-5</del>
46	116.84	<del>4-825437-6</del>
47	119.38	<del>4-825437-7</del>
48	121.92	<del>4-825437-8</del>
49	124.46	<del>4-825437-9</del>
50	127.00	5-825437-0

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	V	BASE MATERIAL CHANGE AND PLATING THICKNESS CHANGE	24 JUN 2014	TJ	JK
	V1	NOTE 1 0.76 µm PLATING UPDATE (PdNi+AuFLASH)	18 JUL 2023	BGC	PS

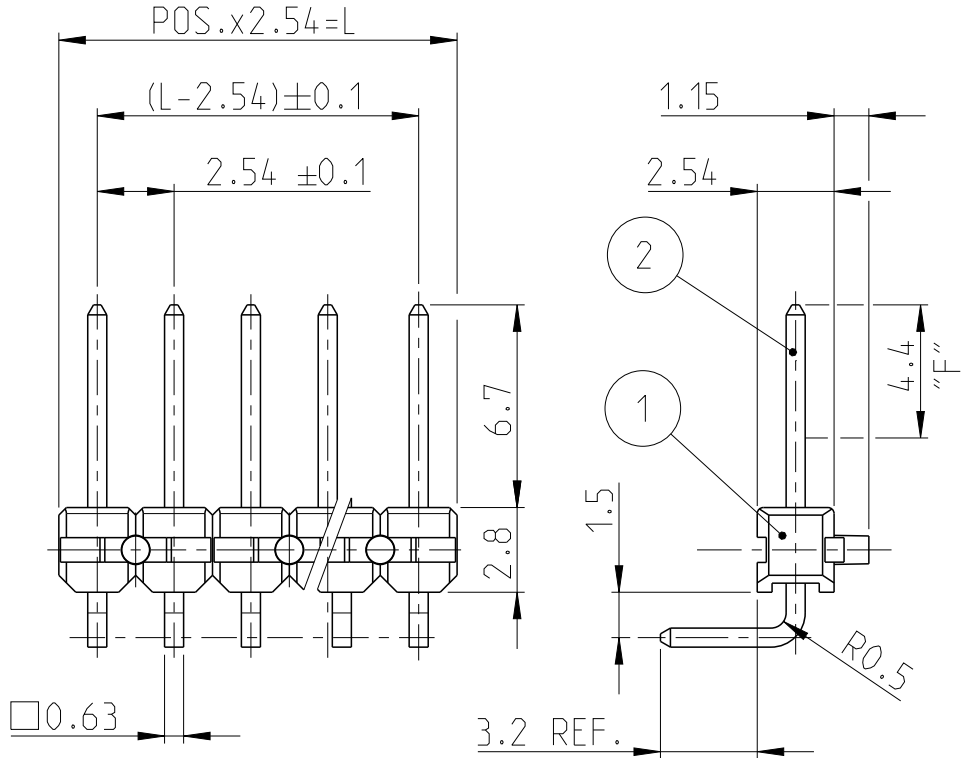

- 1 MATING SIDE: Min 0.76 µm(PdNi + Au FLASH) IN ZONE "F" OVER Min 1.27 µm Ni  
(Alternative plating - Min 0.76 µm Au plating OVER Min 1.27 µm Ni)
- 2 SOLDER SIDE: Min 2.5 µm TIN OVER Min 1.27 µm NICKEL.
- 3 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 3 OBSOLETE

© 2023 TE Connectivity. All Rights Reserved.

-	-	-	-	CuZn	1	CONTACT PIN	2
-	-	-	-	PBT GV	GREEN	PIN HOUSING	1
CUSTOMER PART NO	TE PART NO	REV.	PCS.	MATERIAL	SURFACE COLOUR	DESCRIPTION	ITEM NO

DIMENSIONS: mm		DWN DAHLHEIMER 05DEC 1975	MATERIAL -	FINISH -		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK BOCK 17DEC 1975				
0 PLC ±0.2	1 PLC ±0.2	APVD -				
2 PLC ±0.2	3 PLC ±	PRODUCT SPEC 108-18012	NAME AMPMODU II PIN HEADER, 90DEGREE, SINGLE ROW			
4 PLC ±	ANGLES ±1°	APPLICATION SPEC -	SIZE A 4	CAGE CODE 00779	DRAWING NO C=825437	RESTRICTED TO -
WEIGHT -		CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 1	REV V1