

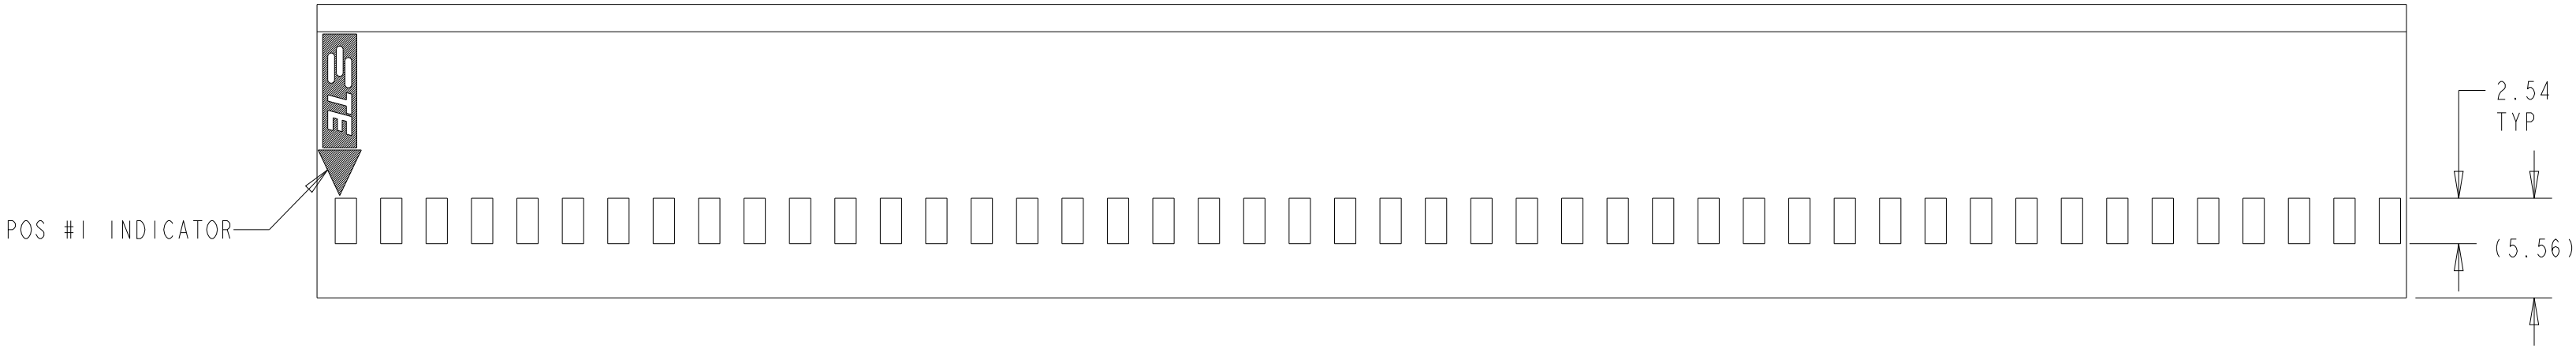
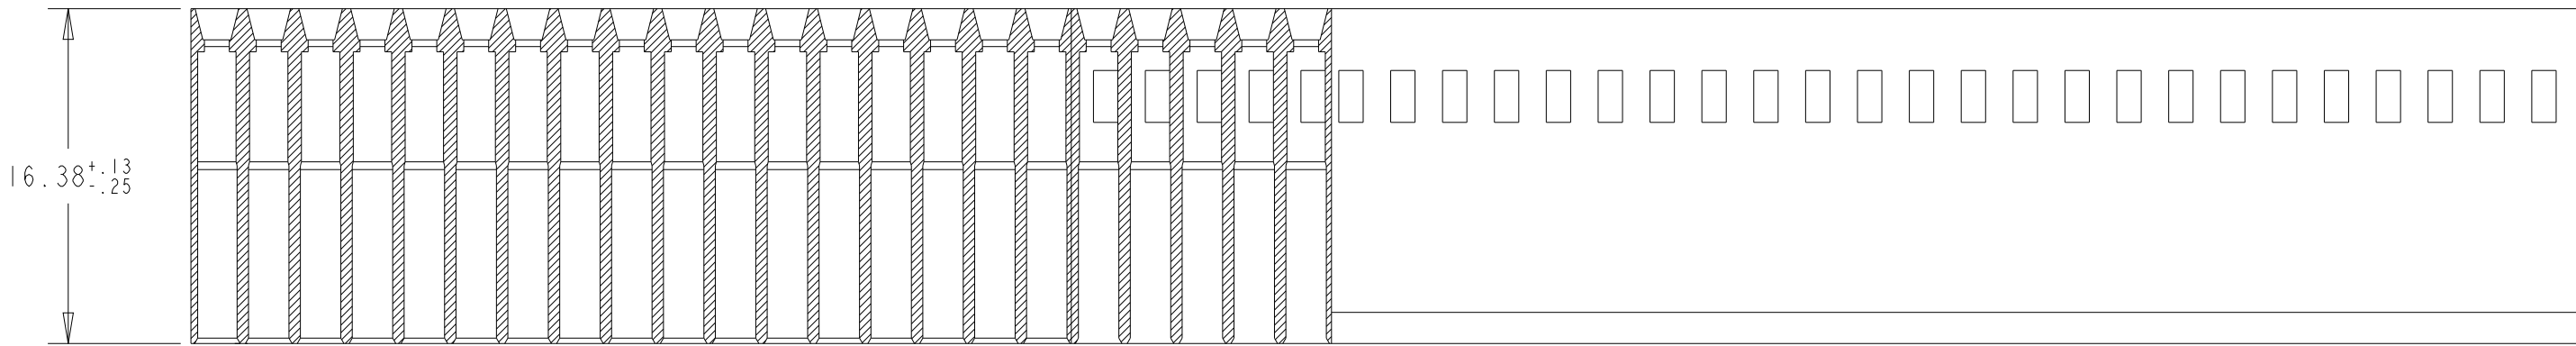


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	R	REVISED PER ECR-22-132152	15JUN2022	RK	SD
	R1	REVISED PER ECN-23-211206	24JUN2023	RK	MF
	R2	NOTE 5 AND 6 REMOVED	22FEB2025	VP	PS
	R3	NOTE UPDATION,PRODUCT AND APPLICATION SPEC ADDED	14APR2025	RS	GVP

- 1 CAVITY LOCATION DIMENSIONS INCREASE IN INCREMENTS OF 2.54 TOLERANCE NON-CUMULATIVE
- 2 USE EXTRACTION TOOL 843996-3 TO REMOVE RECEPTICAL CONTACTS.
- 3 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D. RENAUD/D. SINISI
- 4 MATERIAL:GLASS FILLED THERMOPLASTIC, UL 94-V0 RATED, COLOR: BLACK

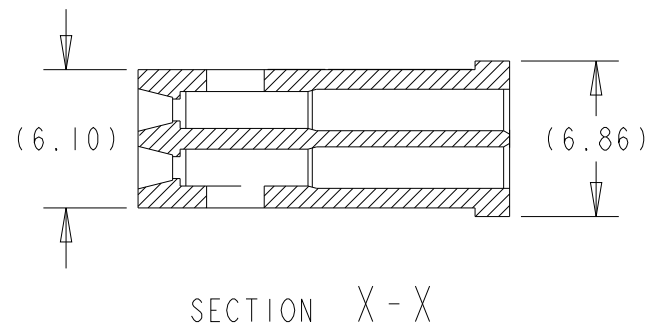


LONGEST POSITION SHOWN

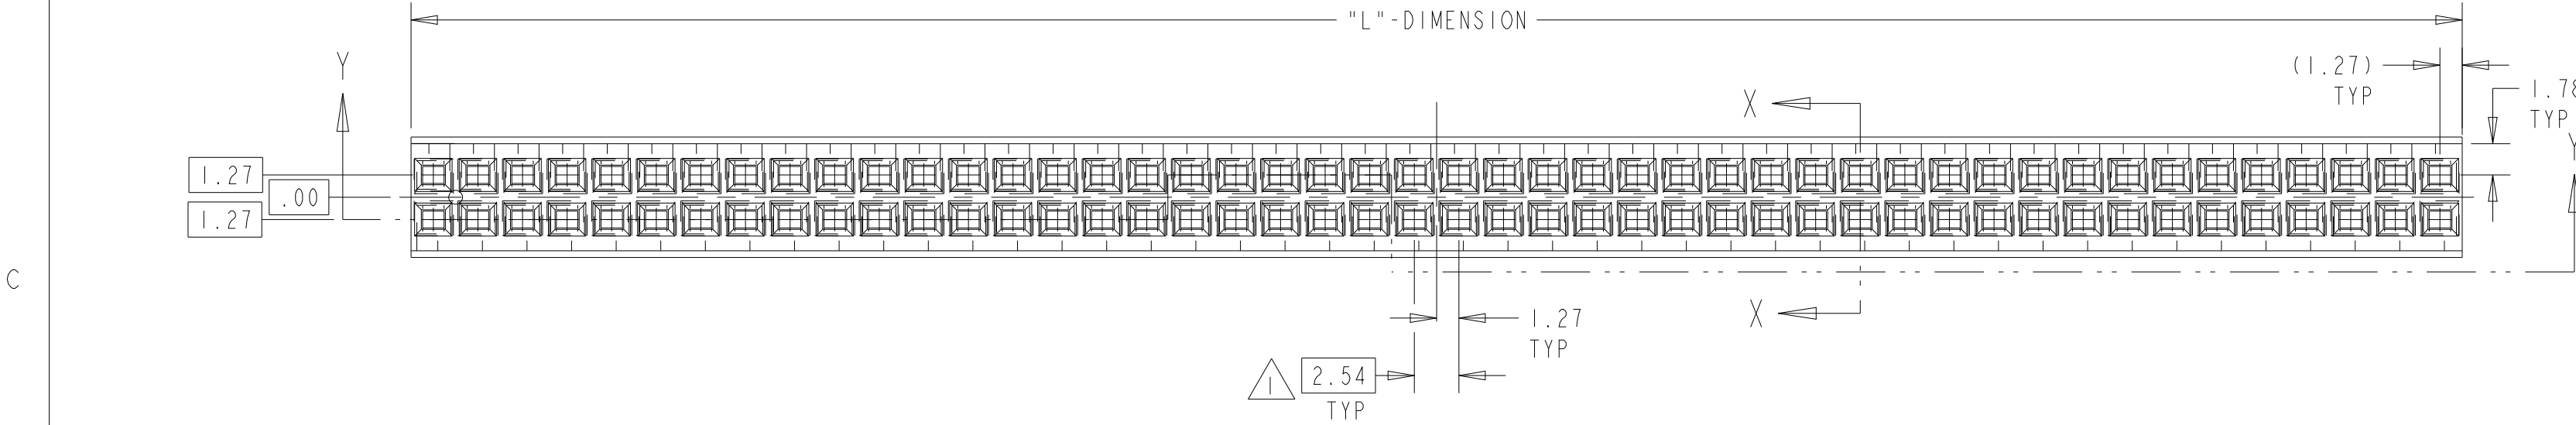


SECTION Y - Y

ISOMETRIC VIEW

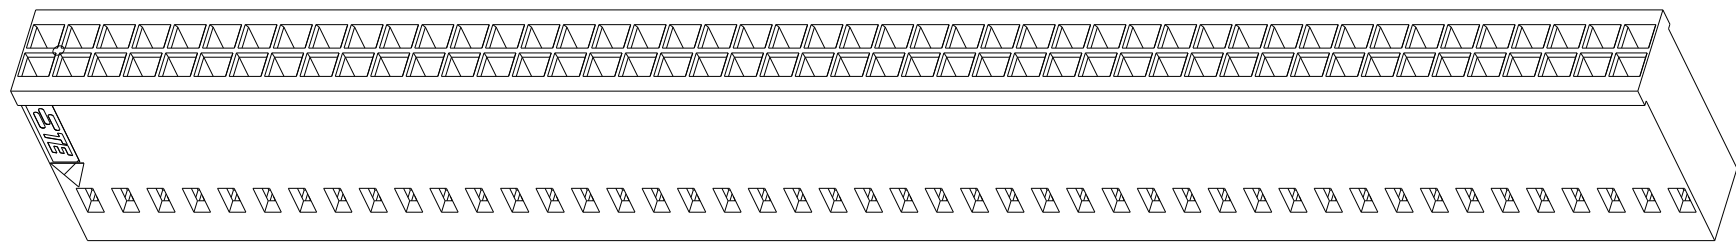

SCALE 2:1

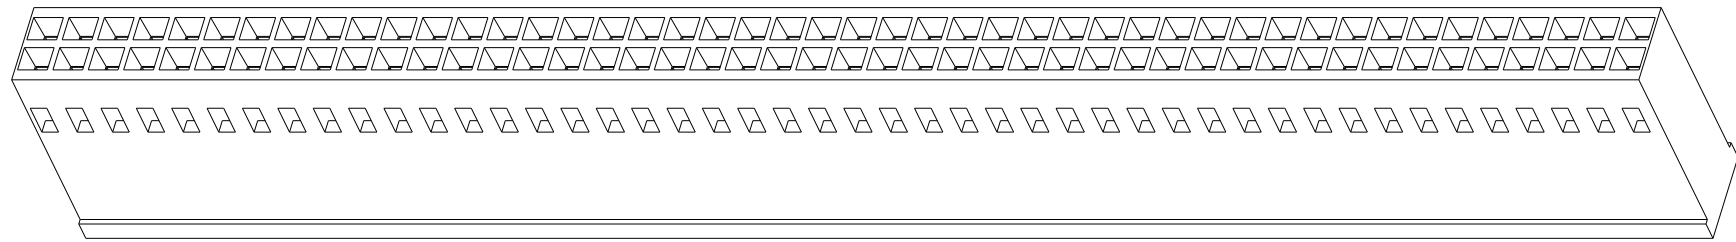

SCALE 2:1

OBSOLETE	5.21	1	4	2-86177-5	
	89.03	34	70	2-86177-4	
	61.09	23	48	2-86177-3	
	116.97	45	92	2-86177-2	
3	63.63	24	50	2-86177-1	
	10.29	3	8	2-86177-0	
OBSOLETE	66.17	25	52	1-86177-9	
	7.75	2	6	1-86177-8	
	56.01	21	44	1-86177-7	
	22.99	8	18	1-86177-6	
	20.45	7	16	1-86177-5	
	17.91	6	14	1-86177-4	
	15.37	5	12	1-86177-3	
	12.83	4	10	1-86177-2	
	50.93	19	40	1-86177-1	
	48.46	18	38	1-86177-0	
	45.85	17	36	86177-9	
	43.31	16	34	86177-8	
	40.77	15	32	86177-7	
	38.23	14	30	86177-6	
	35.69	13	28	86177-5	
	33.15	12	26	86177-4	
	30.61	11	24	86177-3	
	28.07	10	22	86177-2	
	25.53	9	20	86177-1	
		"L" DIMENSION	NUMBER OF SPACES	NUMBER OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN BOB BOLES B6 CHK J. GESEFORD APVD J. GESEFORD	07SEP89 23OCT89 23OCT89	TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±" 1 PLC ±" 2 PLC ±0.5 3 PLC ±0.13 4 PLC ±" ANGLES ±0° 30'		NAME MOD IV CRIMP SNAP-IN CONNECTOR, DOUBLE ROW, 2.54 CENTERS	
MATERIAL 4		PRODUCT SPEC 108-25020 APPLICATION SPEC 114-25003, 114-25016		SIZE A	
CUSTOMER DRAWING		WEIGHT -		RESTRICTED TO -	
SCALE 3:1		SHEET 1		REV R3	