


P	LTR	DESCRIPTION	DATE	DWN	APVD
	C4	REVISED PER ECR-23-166943	01MAR2023	BB	DSC


PART NO BESTELL-NR.	SIZE		RECOMMENDED STRIP LENGTH ABISOLIER-LÄNGE	MINIMUM PULL-OUT STRENGTH SLEEVE STRAND CONDUCTOR MINDEST-AUSZUGSKRAFT HULSE LITZENLEITER /N	COLOUR FARBE	$d_1$ /mm	$d_2$ /mm	$L_1$ /mm	$L_2$ /mm	$s_1$ /mm	$s_2$ /mm	COLOUR TYPE FARBREIHE	PACKAGE QTY VERPACKUNGSEINHEIT PARTS/STÜCK REEL/SPULE
	mm <sup>2</sup>	AWG	/mm		$\triangle 4$								$\triangle 7$
966 904-2	2.50	14	10.5+0.2	50	BLUE BLAU	2.2 <sup>+0.25</sup>	4.2 ±0.2	14 ±1.5	8 ±0.4	0.15 ±0.05	0.30 ±0.10	DIN/2	5000



NOMINAL SIZE NENNGRÖÖE /mm	R /mm
0.5 - 0.75	3.6
1 - 1.5	4.2
2.5	5.0

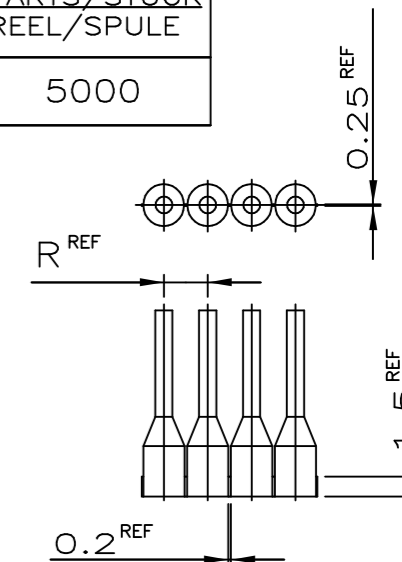

- $\triangle 1$  THE AWG CROSS-SECTION CAN DIFFER SLIGHTLY FROM THE DIN-STANDARD CROSS-SECTION VALUES
- 2 NOTE DELETED
- $\triangle 3$  MAX. INSULATION-DIA. OF WIRE:  $d_2$  MIN.- 0.1
- $\triangle 4$  COLOUR TYPE 1: COLOUR PER FRENCH STANDARD  
DIN COLOUR TYPE: COLOUR PER DIN 46228 PART 4
- 5 NOTE DELETED
- $\triangle 6$  0.6MM ALLOWABLE MOLDING FLASH PRESENT IN THIS ZONE
- $\triangle 7$  STRIP FORM ON CARDBOARD REEL, DIA. ABOUT 450mm
- $\triangle 8$  MATERIAL:  
METAL SLEEVE - COPPER  
PLASTIC SLEEVE - POLYPROPYLENE
- $\triangle 9$  FINISH:  
METAL SLEEVE - TIN PLATE 3 $\mu$ m MIN THICKNESS  
PLATE SLEEVE COLOR - SEE TABLE
- 10 MAXIMUM RECOMMENDED TEMPERATURE 105°C
- $\triangle 11$  PARTS PER DIN 46228 PART 4 EXCEPT FOR S2 DIMENSION WHICH INCLUDES PLASTIC CARRIER STRIP CUTOFF BURR

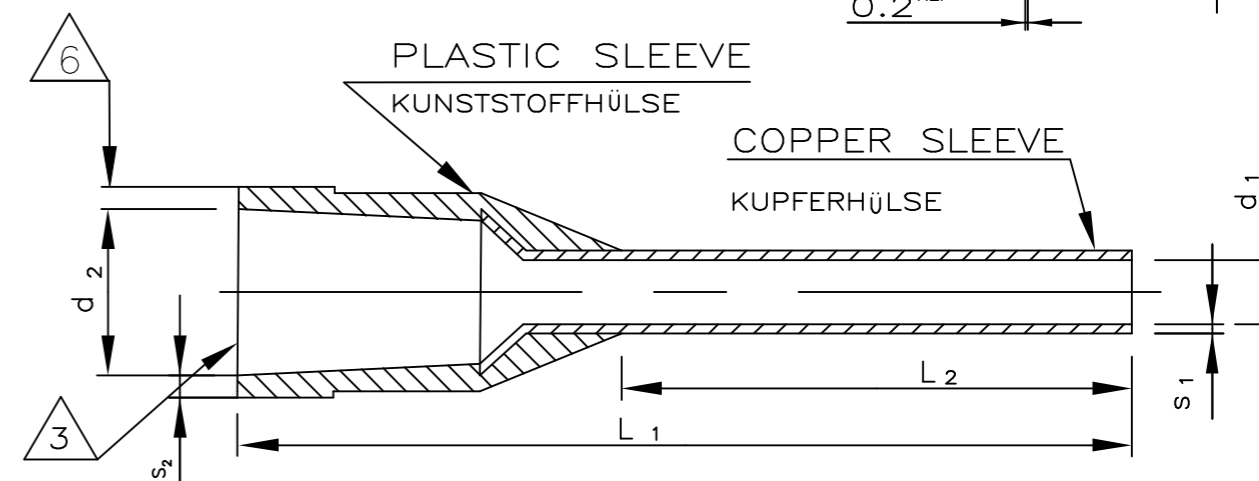

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN E. WERNER 29-APR-96	<b>STE</b> TE Connectivity	
		CHK R.SCHMIDT 29-APR-96		
		APVD G.FELDMEIER 12-SEP-00	NAME	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		WIRE FERRULE WITH PLASTIC SLEEVE, SINGLE CONDUCTOR, DIN 46228 PART 4, STRIP & REEL FORM DIN-& FRENCH COLOR CODING
		0 PLC ± -	SIZE	
		1 PLC ± -	CAGE CODE	
		2 PLC ± -	DRAWING NO	
		3 PLC ± -	RESTRICTED TO	
		4 PLC ± -	A3 00779 C-966904	
		ANGLES ± -	CUSTOMER DRAWING	
MATERIAL $\triangle 8$		FINISH $\triangle 9$	SCALE - SHEET 1 OF 1 REV C4	