

REV. C  
DCO 300855


TOLERANCES  $\pm .010$ " - UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C  
 RESISTANCE \_\_\_\_\_ CURRENT: 30mA MAX.  
 NOMINAL VOLTAGE \_\_\_\_\_ 115 VAC - 50/400Hz  
 MUST OPERATE \_\_\_\_\_ 70.0 VAC MAX., 50/400Hz  
 \_\_\_\_\_  
 MUST RELEASE \_\_\_\_\_ 25.0 VAC MAX., 8.0 VAC MIN., 50/400 Hz

ENVIRONMENT:  
 VIBRATION \_\_\_\_\_ 33 \_\_\_\_\_ Hz TO \_\_\_\_\_ 3000 \_\_\_\_\_ Hz @ \_\_\_\_\_ 30 \_\_\_\_\_ g's  
 SHOCK \_\_\_\_\_ 200 \_\_\_\_\_ g's \_\_\_\_\_ 6 \_\_\_\_\_ MS. DURATION  
 TEMPERATURE \_\_\_\_\_ -70 \_\_\_\_\_ °C TO \_\_\_\_\_ +125 \_\_\_\_\_ °C

NOTES: OPERATE TIME 15 mS MAX.  
 RELEASE TIME 50 mS MAX.  
 CONTACT BOUNCE 1 mS MAX.

CUSTOMER DATA SHEET

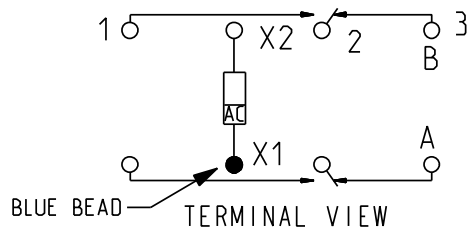

CONTACT RATING: \_\_\_\_\_  
 10 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE.  
 100,000 OPERATIONS

DR. B.D. 07MAR2008 | CK. J.M.B. 5/14/08

**Tyco Electronics** ©COPYRIGHT 2005  
 TYCO ELECTRONICS CORPORATION  
 ALL INTERNATIONAL RIGHTS RESERVED

CUST. \_\_\_\_\_ CATALOG ITEM \_\_\_\_\_  
 CUST. NO. \_\_\_\_\_ REV. \_\_\_\_\_

TE NUMBER  
1617752-2

CII PART NUMBER  
FCA-210-CX9