

REV. C
DCO 300853


TOLERANCES ±.010" - UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C
RESISTANCE _____ CURRENT: 30mA MAX.
NOMINAL VOLTAGE _____ 115 VAC - 50/400Hz
MUST OPERATE _____ 70.0 VAC MAX., 50/400Hz
MUST RELEASE _____ 25.0 VAC MAX., 8.0 VAC MIN., 50/400 Hz

ENVIRONMENT:
VIBRATION _____ 33 Hz TO _____ 3000 Hz @ _____ 20 g's
SHOCK _____ 100 g's _____ 6 MS. DURATION
TEMPERATURE _____ -70 °C TO _____ +125 °C

NOTES: OPERATE TIME 20 MS MAX.
RELEASE TIME 50 MS MAX.
CONTACT BOUNCE 1 MS MAX.

CUSTOMER DATA SHEET

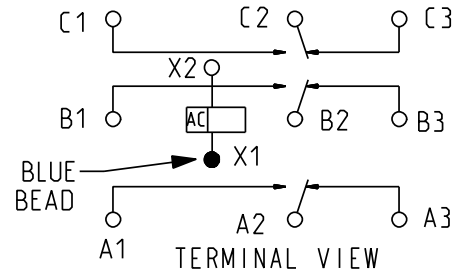

CONTACT RATING: _____
25 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE
50,000 OPERATIONS

DR. B.D. 10APR2008 CK. J.M.B. 5/14/08

Tyco Electronics ©COPYRIGHT 2005
TYCO ELECTRONICS CORPORATION
ALL INTERNATIONAL RIGHTS RESERVED

CUST. _____ CATALOG _____
CUST. NO. _____ REV. N/A

TE NUMBER
5-1617753-7

CII PART NUMBER
FCA-325-CW9