

REV. 0


DCO 16432

COIL: @ 25°C	
RESISTANCE	160 OHMS ±20%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	7.2 VDC
MUST RELEASE	

ENVIRONMENT:	
VIBRATION	10 CPS TO 500 CPS @ 10 g's
SHOCK	30 g's 6±1 MS. DURATION
TEMPERATURE	-55 °C TO +85 °C

NOTES: OPERATE & RELEASE 6 MS MAX.

CUSTOMER DATA SHEET

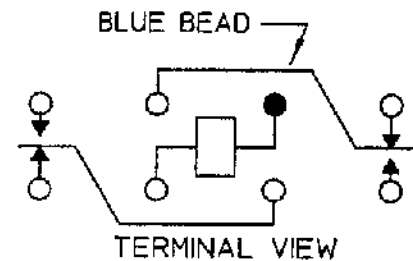

CONTACT RATING: LOW LEVEL TO 5A  
RESISTIVE 100,000 OPERATIONS

DR. PBB 8/9/00 CK. TLG 8-9-00



CUST. C.I.I. STD. HFC5A RELAY  
CUST. NO. REV.

HFC5A1230G00