

REV. 1

DCO 144002


COIL: @ 25°C	700 OHMS ±10%
RESISTANCE	_____
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
_____	_____
MUST RELEASE	1.5 VDC

ENVIRONMENT:

VIBRATION	10 Hz	TO	2000 Hz	@	20 g's
SHOCK	100 g's		6 ±1 MS.	DURATION	
TEMPERATURE	-65 °C	TO	+125 °C		

NOTES: OPERATE & RELEASE 4 MS MAX.  
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

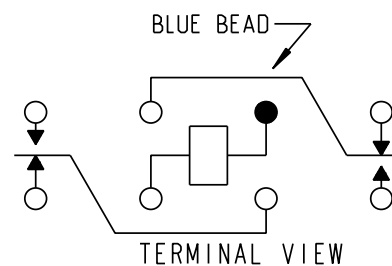

CONTACT RATING: LOW LEVEL TO 5A  
28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 06DEC2004

CK. JMB 2/10/05

**CII Technologies™**  
advanced control electronic solutions

CUST. C.I.I. STD.  
CUST. NO. \_\_\_\_\_ REV. \_\_\_\_\_

"HFW 5A" RELAY

HFW 5A1301K00