


COIL: @ 25°C	
RESISTANCE	1500 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	1.5 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

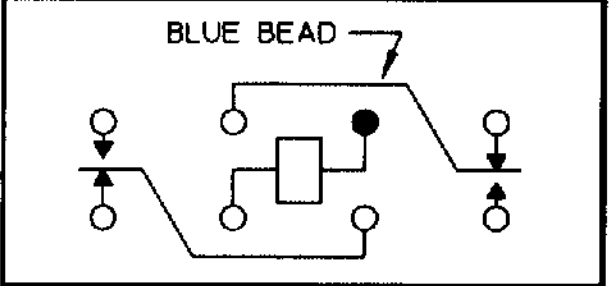

CONTACT RATING: 1 AMP 28 VDC
RESISTIVE 100,000 OPERATIONS

DR. R.B. 6/3/93 CK. 6/3/93 *YMS*



CUST. C. I. I. STD.
CUST. NO.

TYPE 'MFW' RELAY

MFW1105N00