




## Dimensions

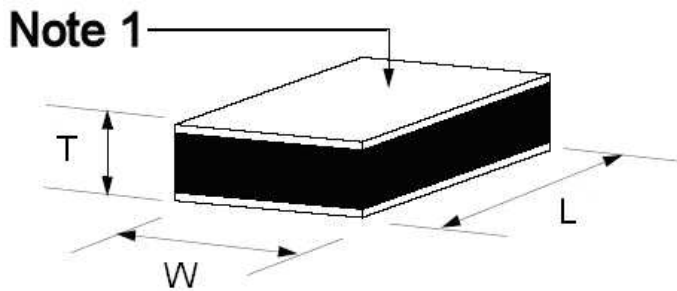

Note 1. Silver Metalisation

## SILVER LEADLESS CHIP

### SPECIFICATIONS

- 0.1K to 1M Ohms Resistance @25°C
- $\pm 5$  and  $\pm 10\%$  Tolerance
- Rapid Time Response
- Surface Mount Capability
- Supplied in “gel” or “waffle” packs

### SILVER LEADLESS CHIP

Silver terminated leadless NTC thermistors

### FEATURES

- 0.1K to 1M Ohms Resistance @25°C
- Supplied with  $\pm 5\%$  and  $\pm 10\%$  tolerance
- Higher precision tolerance available
- Surface mount capability
- Supplied in “gel” or “waffle” packs
- Square or rectangular configurations
- Temperature range -40°C to +125°C
- RoHS Compliant

### APPLICATIONS

- Automotive temperature controls
- Surface mounting on hybrid circuits
- Temperature compensation of crystal oscillators
- Localized temperature sensing

## PRODUCT DEFINITION

Part Number ±5% @ 25°C	Part Number ±10% @ 25°C	Resistance @ 25°C (Ohms)	0/50°C Beta Value	Operating Temperature	Nominal Chip Dimensions (mm)			Nominal Chip Dimensions (inches)		
					L	W	T	L	W	T
0.1K1C3	0.1K1C2	100	3108	-40° to +100°C	1.397	1.397	0.305	0.055	0.055	0.012
0.3K1C3	0.3K1C2	300	3108	-40° to +100°C	0.914	0.914	0.381	0.036	0.036	0.015
1K2C3	1K2C2	1000	3263	-40° to +100°C	0.762	0.762	0.381	0.03	0.03	0.015
1K7C3	1K7C2	1000	3422	-40° to +100°C	1.067	1.067	0.381	0.042	0.042	0.015
2.2K3C3	2.2K3C2	2252	3892	-40° to +125°C	1.905	1.905	0.254	0.075	0.075	0.01
3K3C3	3K3C2	3000	3892	-40° to +125°C	1.651	1.651	0.254	0.065	0.065	0.01
5K3C3	5K3C2	5000	3892	-40° to +125°C	1.397	1.397	0.305	0.055	0.055	0.012
10K3C3	10K3C2	10000	3892	-40° to +125°C	1.016	1.016	0.305	0.04	0.04	0.012
10K4C3	10K4C2	10000	3575	-40° to +125°C	1.143	1.143	0.254	0.045	0.045	0.01
30K5C3	30K5C2	30000	3811	-40° to +125°C	0.889	0.889	0.381	0.035	0.035	0.015
30K6C3	30K6C2	30000	4143	-40° to +125°C	1.397	1.397	0.305	0.055	0.055	0.012
50K6C3	50K6C2	50000	4143	-40° to +125°C	1.143	1.143	0.381	0.045	0.045	0.015
100K6C3	100K6C2	100000	4143	-40° to +125°C	0.889	0.889	0.381	0.035	0.035	0.015
1M9C3	1M9C2	1000000	4582	-40° to +125°C	0.889	0.889	0.254	0.035	0.035	0.01

## NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity Company  
1711 139th Lane NW  
Andover, MN 55304  
Tel: +1 763 689 4870  
Fax: +1 763 689 5033  
customer care.ando@te.com

## EUROPE

Measurement Specialties (Europe), Ltd.,  
a TE Connectivity Company  
Ballybrit Business Park  
Galway Ireland  
Tel : +353-91-753238  
Fax : +353-91-770789  
Email: customer care.glwy@te.com

## ASIA

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
No. 368 Wulian 1st Road  
Gongxing Town  
Shuangliu, Chengdu  
Sichuan, 610200  
China  
Tel: +86 (0) 28 8573 9088  
Fax: +86 (0) 28 8573 9070  
Email: customer care.chdu@te.com

## te.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties (MEAS), American Sensor Technologies (AST), TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2016 TE Connectivity Ltd. family of companies All Rights Reserved.