


PROPERTY OF DEUTSCH E.C.D.

This drawing contains proprietary information that shall not be disclosed, duplicated, nor used in whole or in part for any purpose other than to evaluate this drawing.

C 0641-0-0233

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
C	REVISED AND REDRAWN PER E.O. C3728	01-79	mk

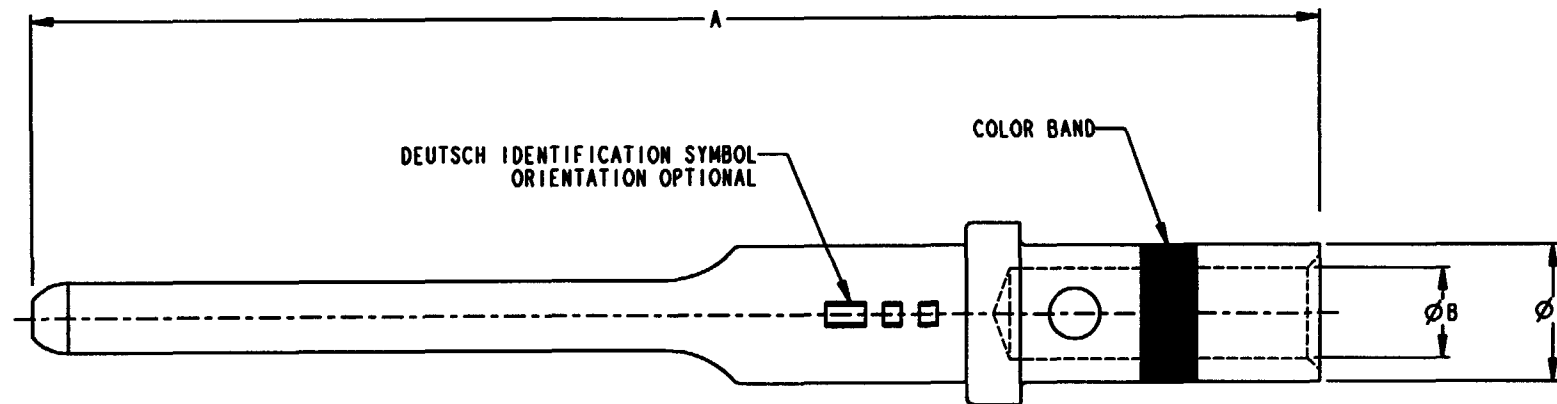

PART NO. ***	COLOR BAND	SIZE	WIRE GAGE RANGE	RECOMMENDED STRIP LENGTH	CRIMP TOOL	POSITIONER	A MAX.	B MIN.	C MAX.
0641-1-20233	RED	20	20, 22, 24	.156 TO .219	M22520/1-01	M22520/1-02 RED	.720	.048	.078
0641-2-16233	BLUE	16	16, 18, 20	.250 TO .313	M22520/1-01	M22520/1-02 BLUE	.821	.066	.103

5. CONTACTS PASS ALL REQUIREMENTS OF MIL-C-39029 AFTER 1500 MATING CYCLES.
4. FOR THE MATING SOCKET CONTACT P/N, SEE DRAWING 10050*-233.
3. MATERIAL: COPPER ALLOY PER MIL-C-39029, TYPE A.
2. FINISH: DEUTSCH ALLOY OVER NICKEL PER QQ-N-290.
1. DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

NOTES:

SIGNATURE & DATE		CONTACT, PIN	CP ---	MIL CODE
DR	J. FRIEDHOF 1-28-99	CRIMP TYPE	DEUTSCH	
CHK	mk2-1-99	MIL-C-39029/4 TYPE CONTACTS WITH DEUTSCHCOAT V	ENGINEERED CONNECTING DEVICES	
PE	J. FRIEDHOF 1-28-99	ENVELOPE	5733 W. Millier Ave. Hemet, California	
APPD	mk		A 0641-0-0233	
SCALE	BY NONE		SHEET 1 OF 1	