



## MICRO-BETACHIP THERMISTOR PROBE (MCD)

- NTC Temperature Sensor
- Fast time response
- Small tip diameter (Ø0.5mm Max.)
- Various lead lengths available

### DESCRIPTION

NTC Thermistor soldered to 38 AWG Solid Nickel Bifilar with Polyester Type Insulation. Unit potted in polyimide tube using Epoxy Resin.

### FEATURES

- Rapid Time Constant (200 milliseconds in liquids).
- Custom tolerances available on request
- 0.3 mW/°C typ. Dissipation Constant in air at 25°C.
- Smaller than Mini-Beta CURVE (MCD) device.
- Temperature range -40°C to +125°C

### APPLICATIONS

- Low volume flow sensors (liquids or gases)
- Laboratory animal research.
- Peltier (thermal cooler) temperature tracking sensors.
- Temperature control for bath showers.
- DNA research sensors.
- Medical catheters.

# MICRO-BETACHIP THERMISTOR PROBE (MCD)

## PERFORMANCE SPECS

Parameters	Units	Value
Nominal Resistance at +25°C	Ohms	100000
Resistance tolerance at +25°C	°C	± 0.2
Alpha Value at +25°C	%/°C	-4.68
Beta Value 25/85	K	4261
Tolerance on Beta Value 25/85	%	± 0.5
Time response in Liquids	milliseconds	200
Dissipation Constant in still air	mW/°C	0.3

## MECHANICAL DETAILS

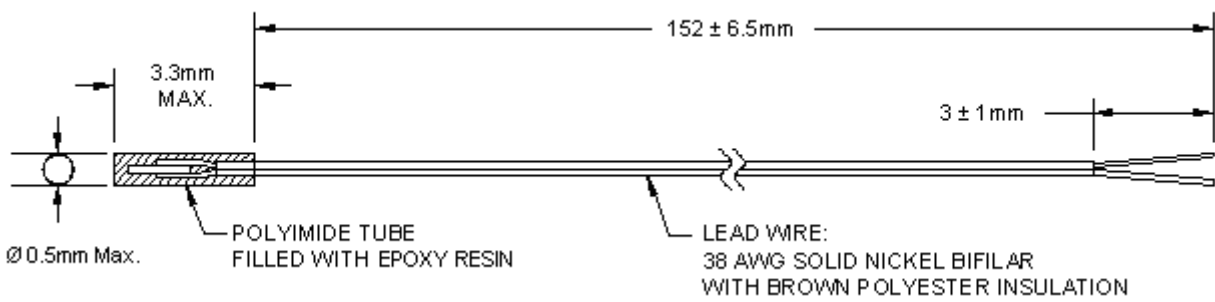


Figure 1: Micro-BetaCHIP Thermistor Probe (MCD)

# MICRO-BETACHIP THERMISTOR PROBE (MCD)

## RESISTANCE V TEMPERATURE TABLE

Temp. °C	Ohms
-40	4,071,370.1
-39	3,799,004.1
-38	3,546,480.7
-37	3,312,243.5
-36	3,094,866.1
-35	2,893,041.2
-34	2,705,569.5
-33	2,531,350.9
-32	2,369,375.1
-31	2,218,714.2
-30	2,078,515.5
-29	1,947,995.0
-28	1,826,431.7
-27	1,713,161.8
-26	1,607,574.3
-25	1,509,106.3
-24	1,417,239.1
-23	1,331,494.6
-22	1,251,431.4
-21	1,176,642.6
-20	1,106,752.3
-19	1,041,413.3
-18	980,305.0
-17	923,130.6
-16	869,616.1
-15	819,507.6
-14	772,570.3
-13	728,586.8
-12	687,355.4
-11	648,689.5
-10	612,415.9
-9	578,374.1
-8	546,415.1
-7	516,400.5
-6	488,202.0
-5	461,700.0
-4	436,783.9
-3	413,350.5
-2	391,303.8
-1	370,554.6
0	351,020.0
1	332,622.5

Temp. °C	Ohms
2	315,290.2
3	298,956.0
4	283,557.2
5	269,035.5
6	255,336.6
7	242,409.5
8	230,207.0
9	218,684.8
10	207,801.5
11	197,518.4
12	187,799.5
13	178,611.0
14	169,921.3
15	161,700.8
16	153,921.8
17	146,558.5
18	139,586.6
19	132,983.3
20	126,727.3
21	120,798.7
22	115,178.7
23	109,849.8
24	104,795.4
25	100,000.0
26	95,449.2
27	91,129.2
28	87,027.3
29	83,131.3
30	79,430.0
31	75,912.6
32	72,569.2
33	69,390.3
34	66,367.1
35	63,491.1
36	60,754.5
37	58,149.8
38	55,670.2
39	53,308.9
40	51,059.8
41	48,917.1
42	46,875.1
43	44,928.7

Temp. °C	Ohms
44	43,072.9
45	41,303.2
46	39,615.1
47	38,004.5
48	36,467.4
49	35,000.2
50	33,599.3
51	32,261.5
52	30,983.7
53	29,762.8
54	28,596.0
55	27,480.8
56	26,414.6
57	25,395.0
58	24,419.7
59	23,486.7
60	22,594.0
61	21,739.5
62	20,921.5
63	20,138.3
64	19,388.2
65	18,669.7
66	17,981.4
67	17,321.7
68	16,689.4
69	16,083.2
70	15,502.0
71	14,944.6
72	14,409.9
73	13,896.8
74	13,404.5
75	12,932.0
76	12,478.4
77	12,042.8
78	11,624.5
79	11,222.8
80	10,836.8
81	10,465.9
82	10,109.4
83	9,766.8
84	9,437.3
85	9,120.6

Temp. °C	Ohms
86	8,815.9
87	8,522.9
88	8,240.9
89	7,969.6
90	7,708.5
91	7,457.1
92	7,215.1
93	6,982.0
94	6,757.6
95	6,541.4
96	6,333.1
97	6,132.4
98	5,939.0
99	5,752.6
100	5,572.8
101	5,399.5
102	5,232.4
103	5,071.2
104	4,915.7
105	4,765.7
106	4,620.9
107	4,481.2
108	4,346.3
109	4,216.1
110	4,090.4
111	3,968.9
112	3,851.7
113	3,738.4
114	3,628.9
115	3,523.2
116	3,420.9
117	3,322.1
118	3,226.6
119	3,134.3
120	3,045.0
121	2,958.6
122	2,875.1
123	2,794.3
124	2,716.1
125	2,640.5

## MICRO-BETACHIP THERMISTOR PROBE (MCD)

### ORDERING INFORMATION

Part Number	Description	$\Omega$ @25°C	MOQ
100K6MCD1	Micro-BetaCHIP Thermistor Probe (MCD)	100000	1000 *

\* For quantities less than Minimum Order Quantity – Contact Distribution

#### NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity Company  
1711 139th Lane NW  
Andover, MN 55304  
Tel: +1 763 689 4870  
Fax: +1 763 689 5033  
customer care.ando@te.com

#### EUROPE

Measurement Specialties (Europe), Ltd.,  
a TE Connectivity Company  
Ballybrit Business Park  
Galway Ireland  
Tel : +353-91-753238  
Fax : +353-91-770789  
Email: customer care.glwy@te.com

#### ASIA

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
No. 368 Wulian 1st Road  
Gongxing Town  
Shuangliu, Chengdu  
Sichuan, 610200  
China  
Tel: +86 (0) 28 8573 9088  
Fax: +86 (0) 28 8573 9070  
Email: customer care.chdu@te.com

#### te.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties (MEAS), American Sensor Technologies (AST), TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2016 TE Connectivity Ltd. family of companies All Rights Reserved.