

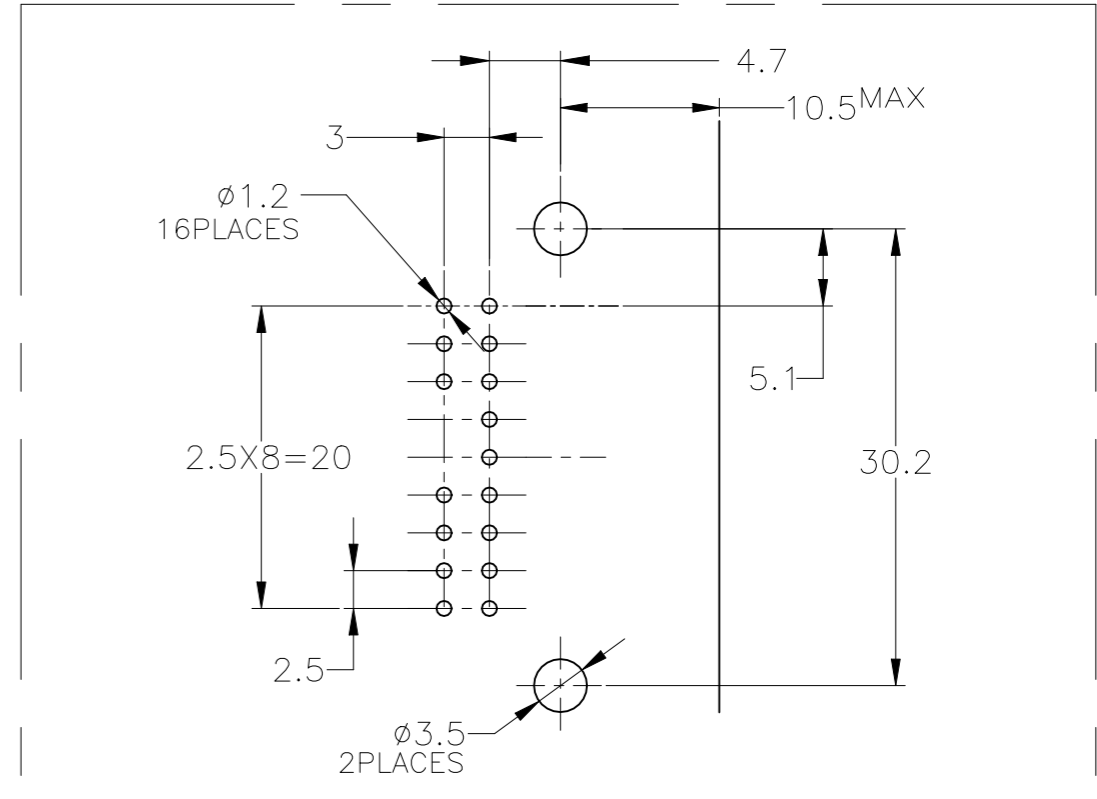
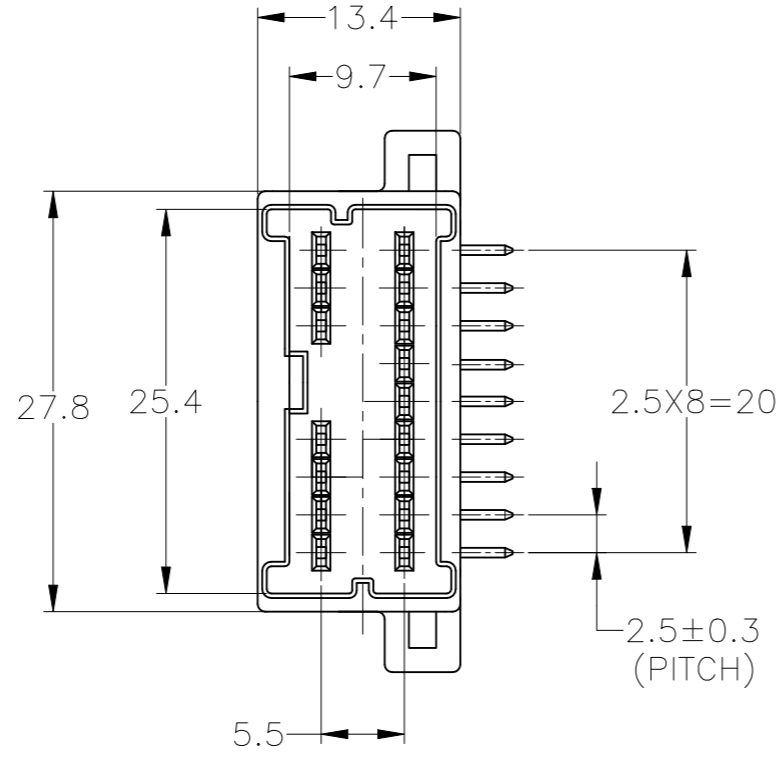


REVISIONS 変更					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A5	ECR-23-185274	04SEP2023	AG	RK

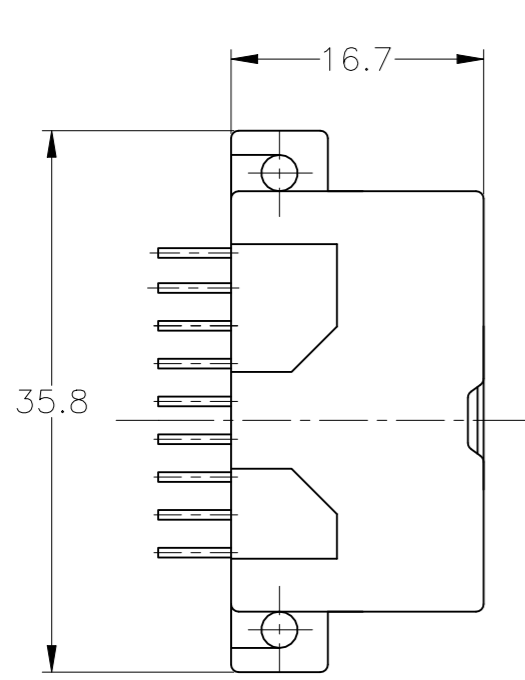

MOUNTING DIMENSIONS FOR P.C.BOARD
プリント基板取付け穴寸法
(TOLERANCES: ±0.1
PITCH TOLERANCES MUST NOT ACCUMULATE.)
(公差: ±0.1 ピッチ公差は累積されないこと)
P.C.BOARD THICKNESS
基板厚: 1.6mm

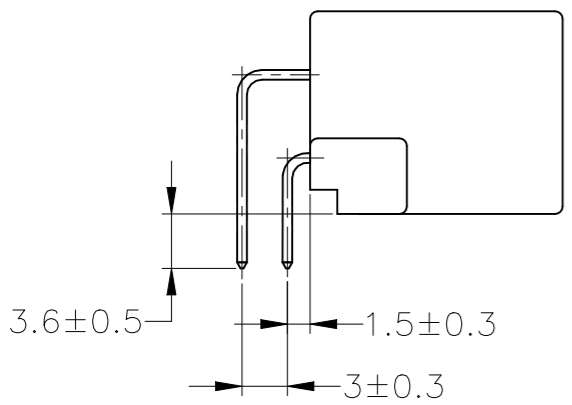

OBSELETE	1123371-1	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN (BRIGHT)	NATURAL	1123419-3
OBSELETE	SEE DRAWING 1123419-2				1123419-2
	1123371-1	PRE-TIN	NATURAL		1123419-1
	MATING HOUSING PART NUMBER 嵌合相手型番	SOLDERING SIDE 半田付け部	CONTACT SUDE 嵌合部側	COLOR 色	PART NUMBER 型番
		CONTACT FINISH コンタクト仕上			

- 1 RECOMMENDED MOUNTING SCREW: PAN-HEADED, TYPE 2 TAPPING SCREW OF 3DIA X 6LENGTH (JIS B1115,B1122), TIGHTENING TORQUE: 39.2N-cmMAX
- 1 推奨取付ネジ: JIS B1115, B1122 タッピングねじ, なべ2種, 呼び径3, 長さ6, 締付トルク: 39.2N-cm以下

TOLERANCE UNLESS OTHERWISE SPECIFIED: 一般公差	
0 < x ≤ 10	: ±0.2
10 < x ≤ 30	: ±0.25
30 < x ≤ 100	: ±0.3
ANGLE ; 角度	: ±3°

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位: 耗 mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	DWN A.YAMAGUCHI 25JUL03	TE Connectivity 040III MULTILOCK CONNECTOR 16POS CAP HOUSING ASSEMBLY WIRE TO BOARD H-TYPE
	0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-	CHK K.BETSUI 25JUL03	
		APVD K.BETSUI 25JUL03	
MATERIAL 材料 PBT	FINISH 仕上 COLOR: SEE TABLE	PRODUCT SPEC 製品規格 108-5603 APPLICATION SPEC 取付適用規格	

WEIGHT 0.000000	SIZE A3	CAGE CODE 00779	DRAWING NO 番号 C-1123419	RESTRICTED TO -
CUSTOMER DRAWING			SCALE 尺度 2:1	SHEET 1 OF 1