
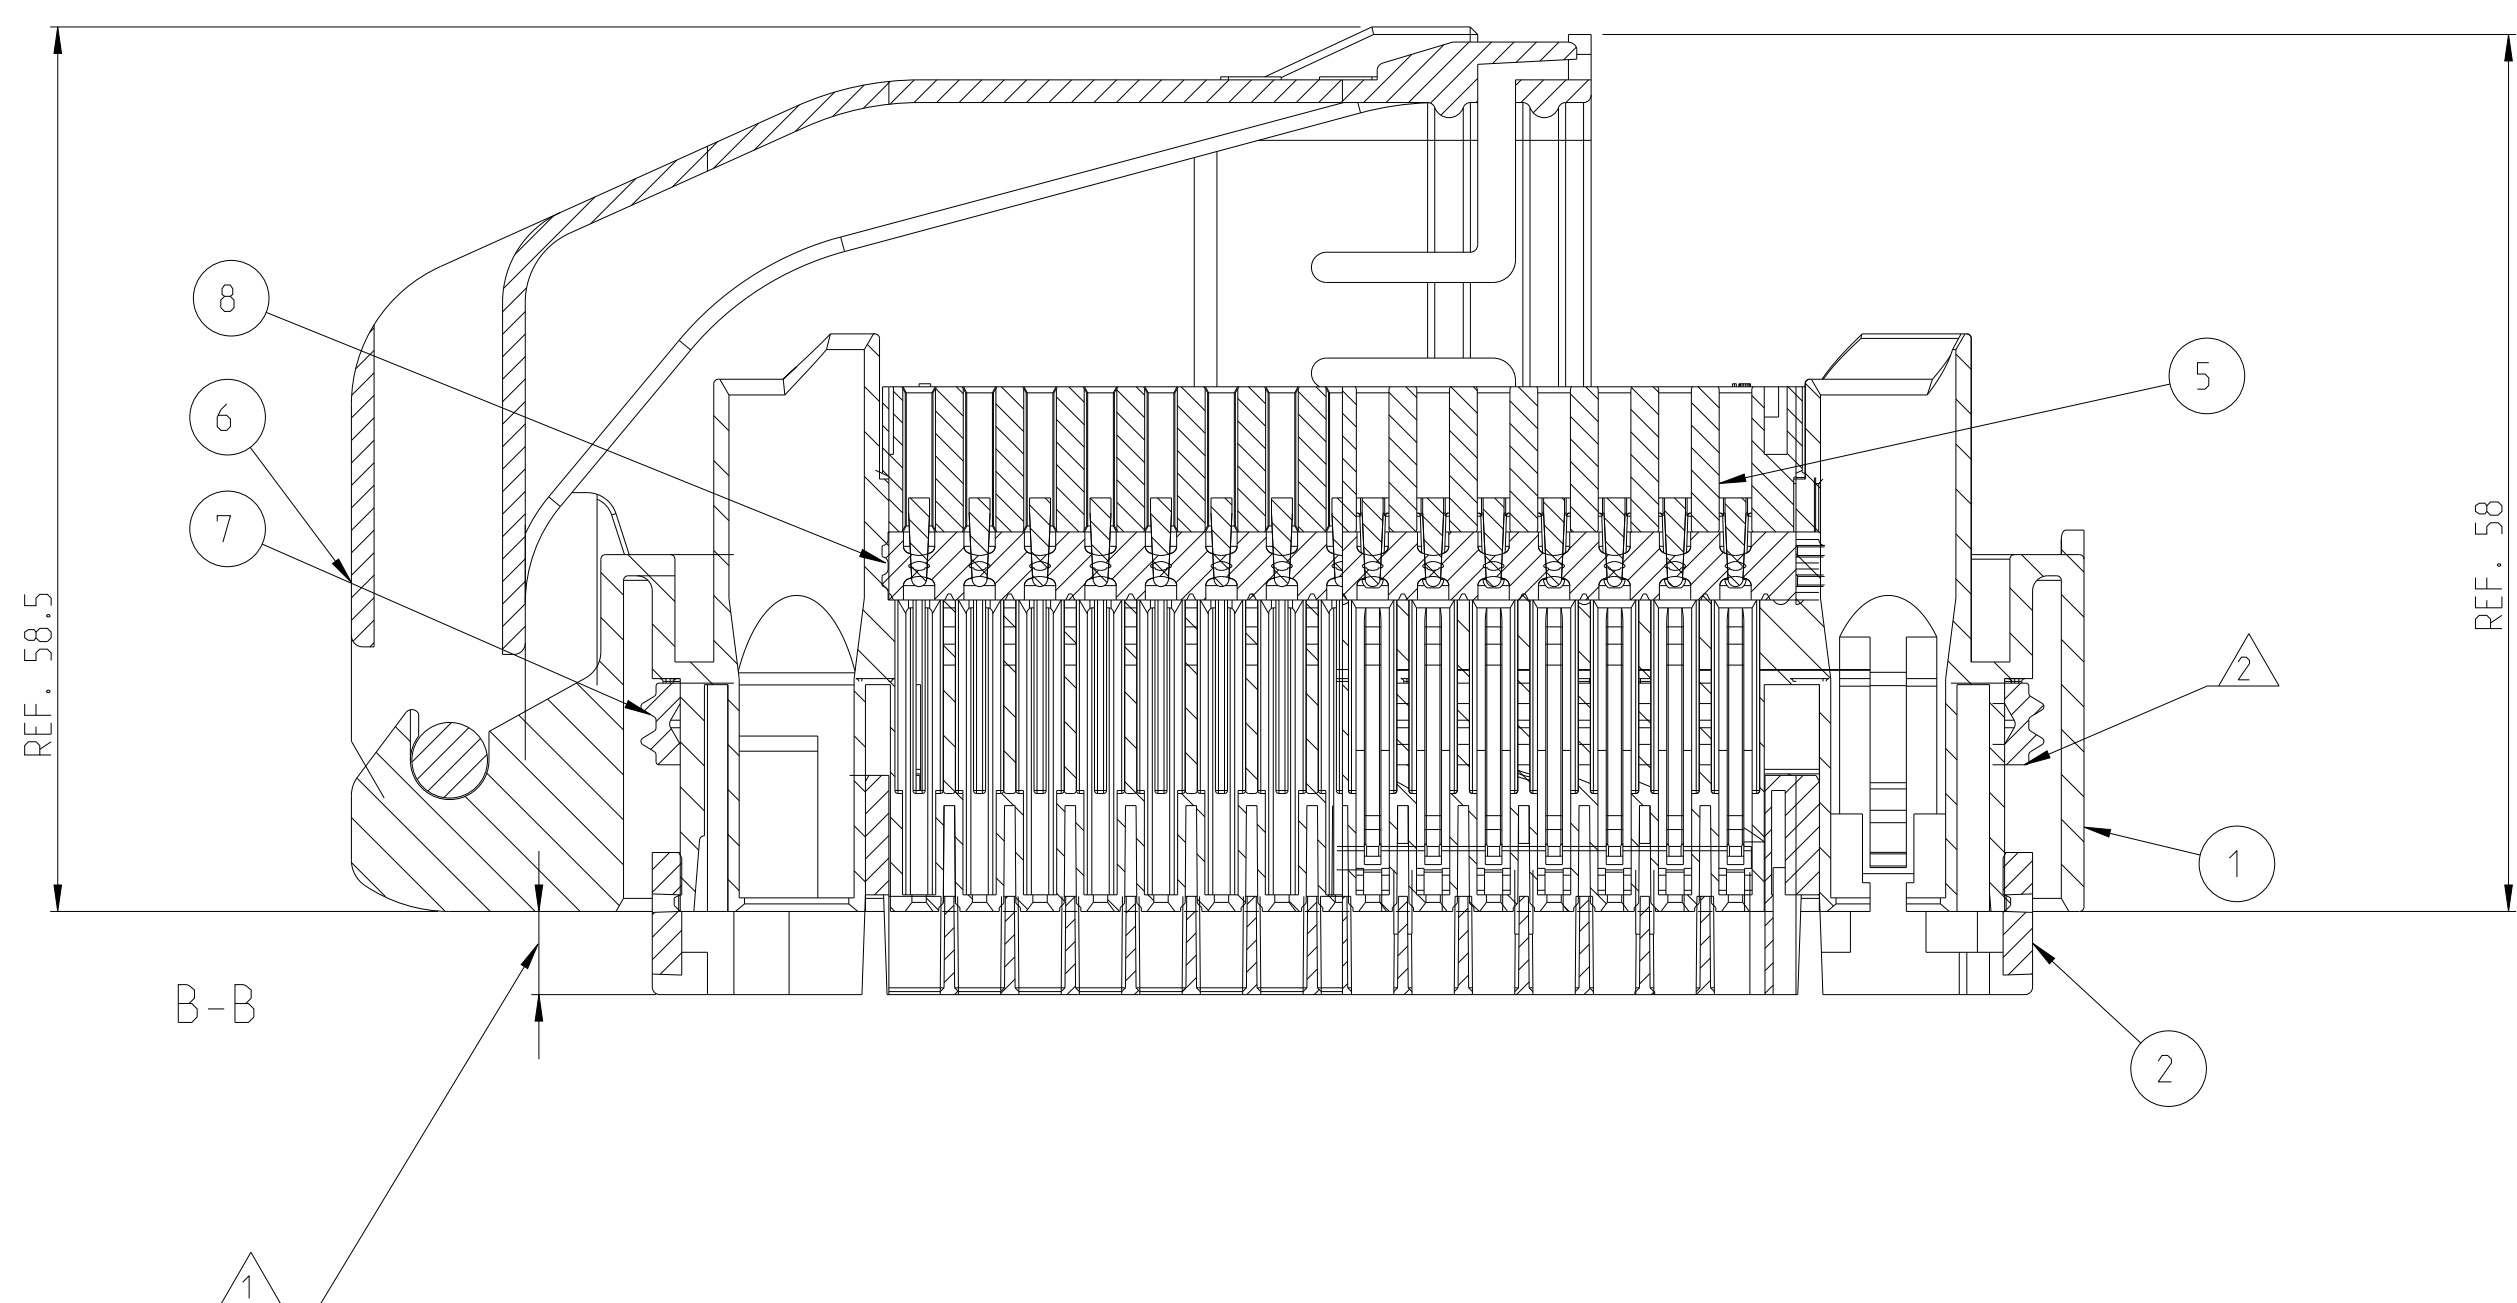


LOC	DISP	REV	DESCRIPTION	DATE	BY	APPD
A1	-	P	PCN-E-12-017366	080CT2002	MT	HR
		P1	PCN-E-14-012222	14AUG2004	JR	HR
		P2	E-20-009464	13JUL2020	JH	PT
		P3	PCN-22-142825	20AUG2022	WKS	PT


SHOWN VIEW:  
 - COVER IN END-LOCK POSITION  
 - SPACER IN PRE-LOCK POSITION

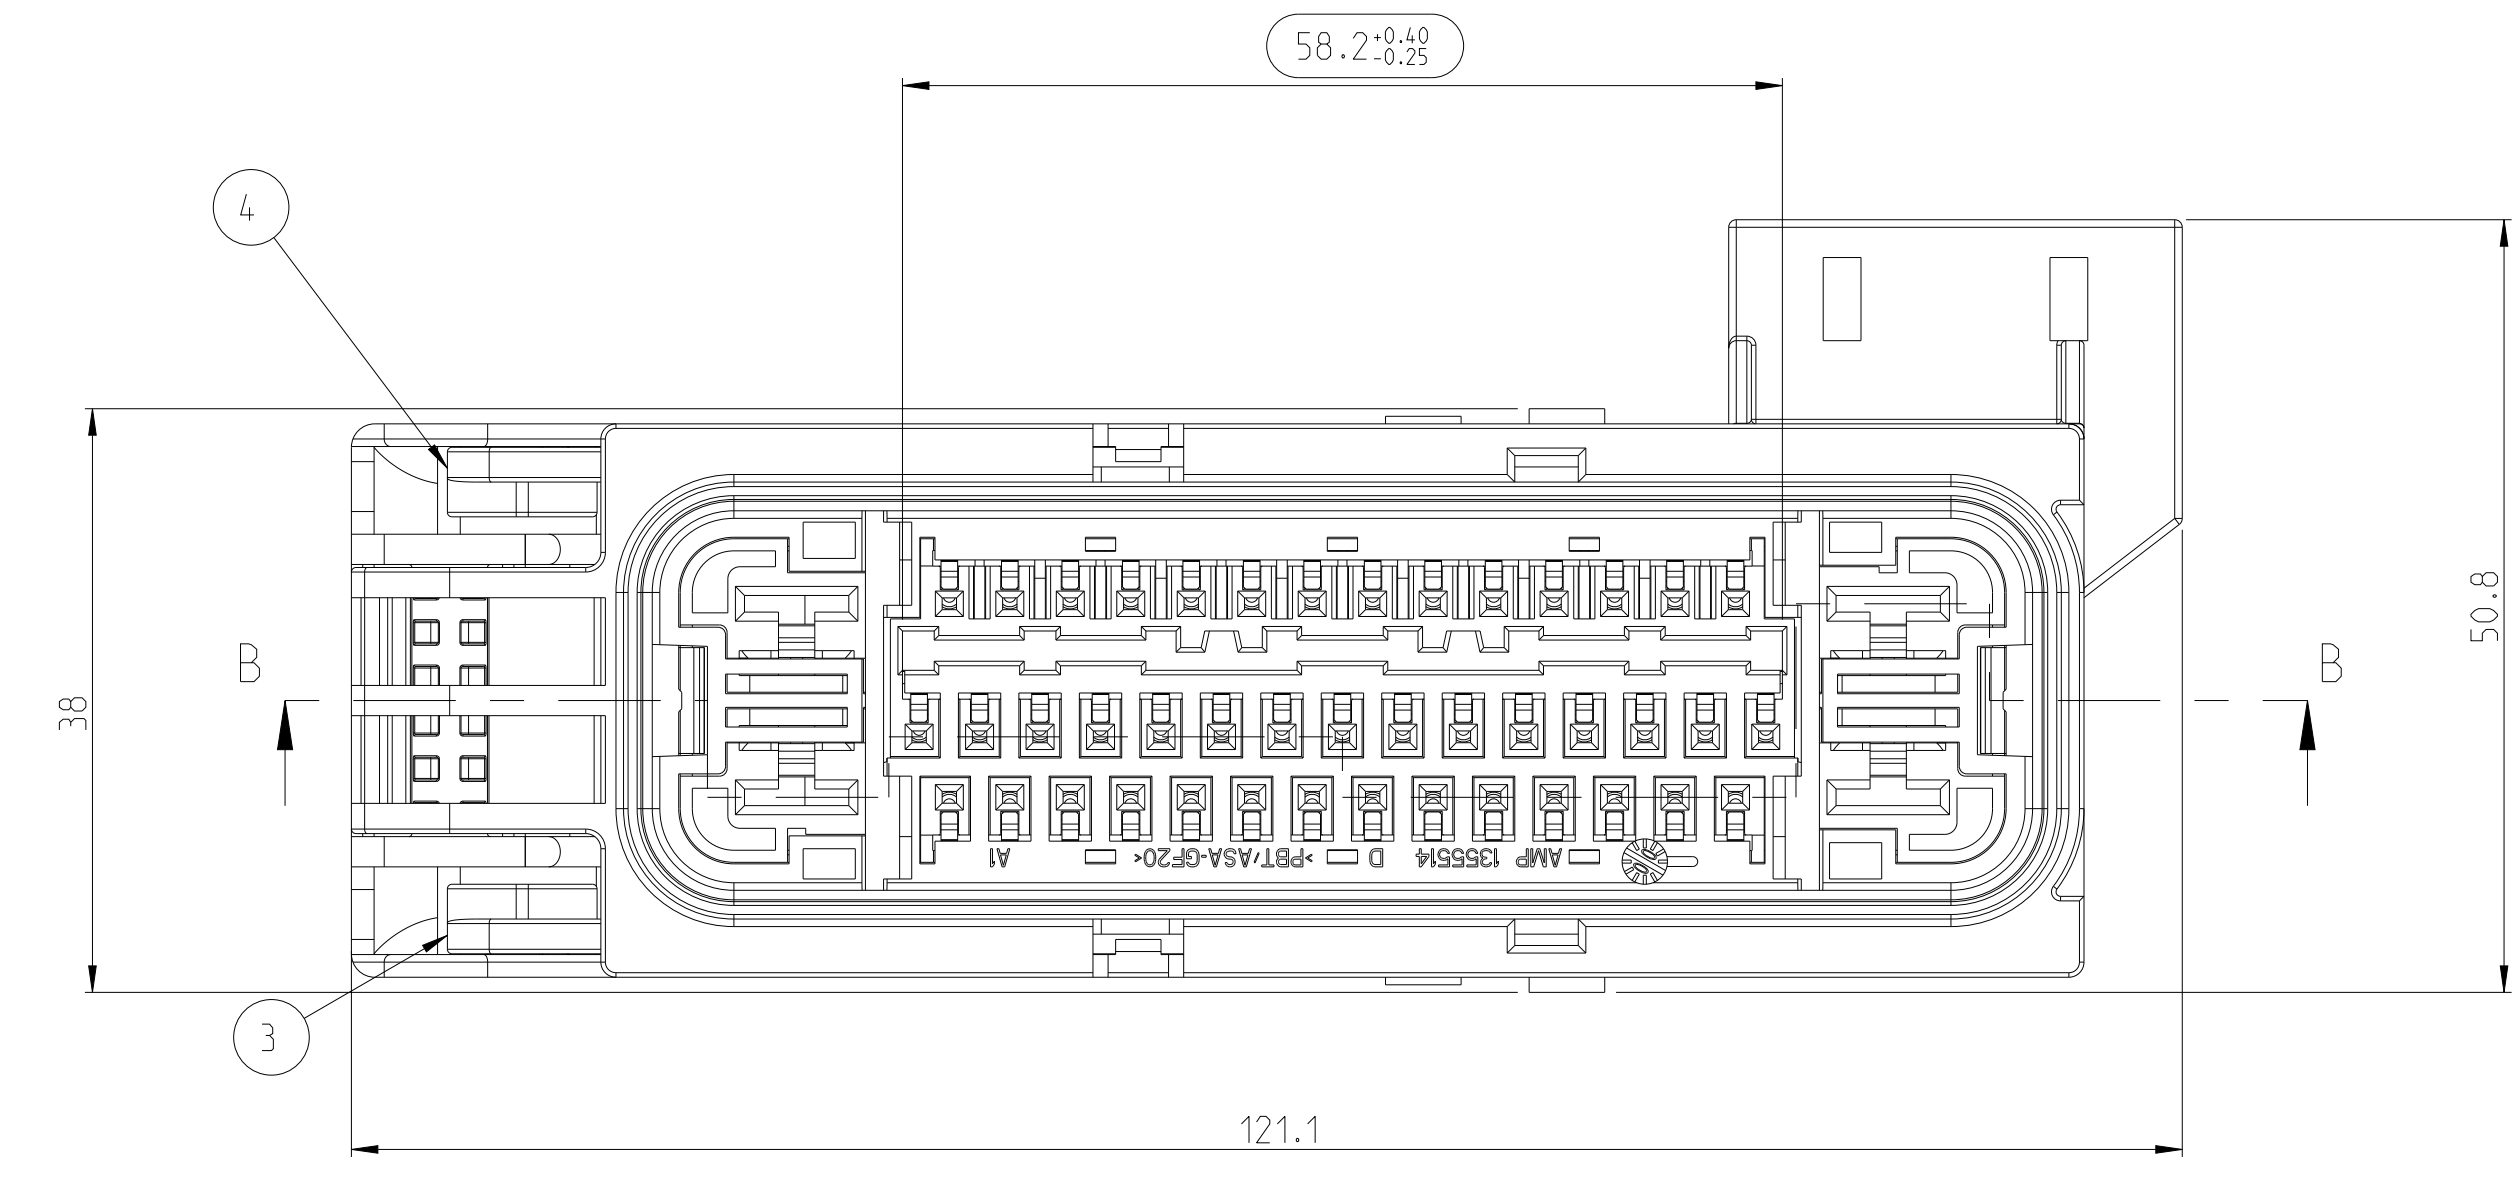

Bemerkungen  
 NOTES

- ⚠ Spacer in Vorraststellung  
 SPACER IN PRE-LOCK POSITION
- ⚠ Die Dichtung ist bei der Assemblage vollständig einzusetzen, so dass alle Rippen des Buchsengehäuses in den entsprechenden Taschen der Dichtung sind.  
 THE SEALING SHOULD BE FULLY INSERTED AND ALL RIBS OF THE SOCKET HOUSING SHOULD BE INSIDE OF THE CORRESPONDING POCKETS OF THE PERIPHERAL SEAL
- ⚠ Farbpunkt und eine dreistellige Nummer zur Markierung der Variante gemäss der Tabelle. Die dreistellige Nummer ist plziert auf dieser oder auf der anderen Seite der Kappe fuer die Familiendichtung, der Farbpunkt ist plziert auf dem Buchsengehäuse unterhalb des Kabelabganges.  
 COLOR DOT AND A THREE DIGIT NUMBER TO IDENTIFY THE CONFIGURATION ACCORDING TABLE. THE THREE DIGIT NUMBER IS LOCATED EITHER ON THIS SIDE OR ON THE OTHER SIDE OF THE COVER FOR FAMILY SEAL. THE COLOUR DOT IS LOCATED ON THE SOCKET HOUSING BELOW THE CABLE EXIT
- ⚠ Signal Kontakte sind ausgelegt fuer Kabelgroessen AWG 18-20, Leiterquerschnitt 0.5 - 0.75mm<sup>2</sup>. Fuer die Dichtigkeit der Steckverbinder ist notwendig, dass der Isolationsdurchmesser 1.4 - 1.9mm<sup>2</sup> betraegt.  
 SIGNAL CONTACTS ARE SUITABLE FOR WIRE SIZE AWG 18-20, CONDUCTOR CROSS SECTION 0.5 - 0.75mm<sup>2</sup>. FOR THE SEALING OF THE CONNECTOR IS NECESSARY A CABLE ISOLATION DIAMETER OF 1.4 - 1.9mm<sup>2</sup>.
- ⚠ Lagerverpackung zur Sicherung des Spacers  
 TRAY PACKAGE TO PROTECT THE SPACER

SHOWN VIEW:  
 - COVER IN PRE-LOCK POSITION  
 - SPACER IN END-LOCK POSITION

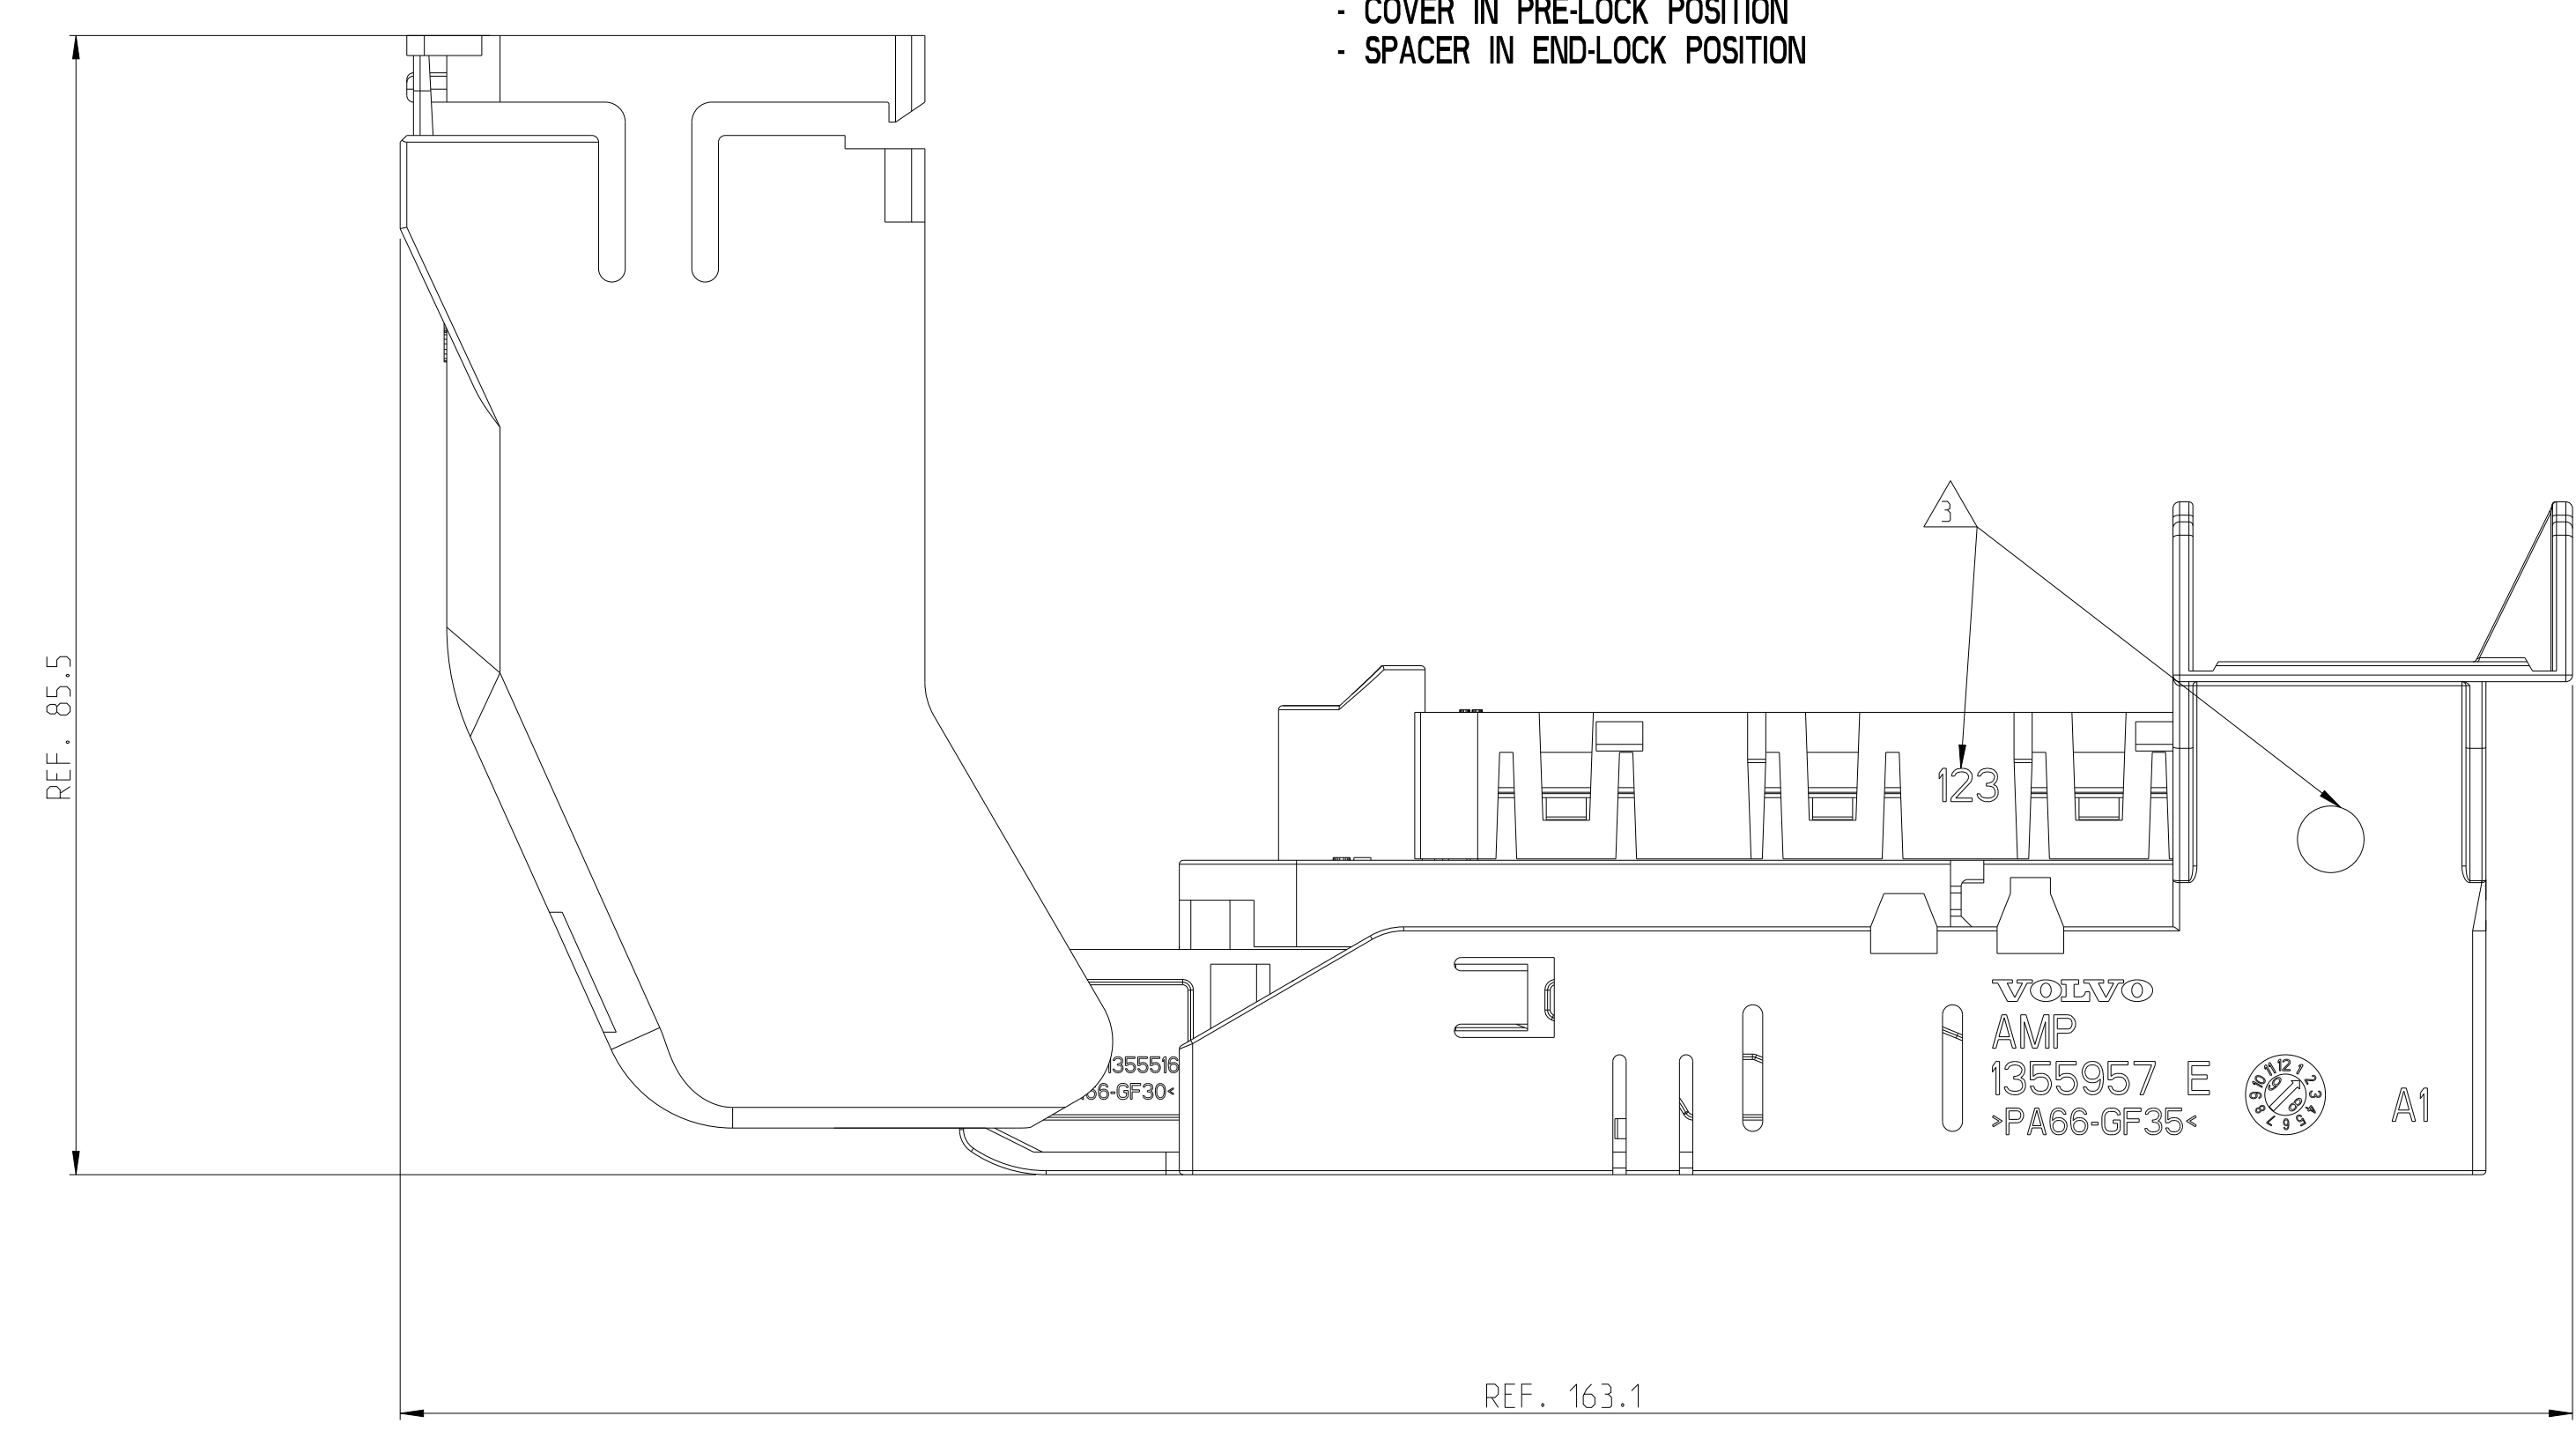

DESCRIPTION	COLOUR/ PLATING	YAZAKI PART NO	TE- PART NO	MATERIAL/ SPEC NO
0.64 FEMALE TERMINAL	TIN	-	638551-3	SEE TERMINAL DRAWING
PLUG	GREEN	7158-3080-60	-	SEE DRAWING
WIRE SEAL (LARGE)	BLACK	7158-3083	-	SEE DRAWING
WIRE SEAL (MEDIUM)	BLUE	7158-3082-90	-	SEE DRAWING
WIRE SEAL (SMALL)	RED	7158-3081-50	-	SEE DRAWING
6.3 SEALED FEMALE TERMINAL	TIN	7116-4142-02	-	SEE TERMINAL DRAWING
6.3 SEALED FEMALE TERMINAL	TIN	7116-4141-02	-	SEE TERMINAL DRAWING
6.3 SEALED FEMALE TERMINAL	TIN	7116-4140-02	-	SEE TERMINAL DRAWING
APPLICABLE COMPONENTS				

11 Siehe Tabelle Seite 2  
 SEE TABLE SHEET 2

CUSTOMER PN	TE- PN	REV.	QTY.	DESCRIPTION	MATERIAL	COLOUR	ITEM
86884XX	X-1355956-X	P	1	FAMILY SEALING	SILICONE	REDDISH BROWN	8
			1	PERIPHERAL SEAL	SILICONE	GREEN	7
			1	WIRE DRESS COVER	PA6/GB20-GF10	BLACK	6
			1	COVER FAM.-SEAL	PBT/ASA-GF20	BLACK	5
			1	RIGHT SLIDE	PA66-GF30	BLACK	4
			1	LEFT SLIDE	PA66-GF30	BLACK	3
			1	SPACER	PBT/ASA-GF20	RED	2
		1	HOUSING	PA66-GF35	BLACK	1	

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 20 JAN 2007  
 DIMENSIONS: MILLIMETERS UNLESS OTHERWISE SPECIFIED. DATE: 20 JAN 2007  
 STE Connectivity  
 ASSY 47WAY MK25/60  
 VOLVO VERSION  
 SIZE: A0 CASE CODE: 00779 DRAWING NO: C=1355956 RESTRICTED TO: 1 OF 2 REV: P3  
 SCALE: 2:1

