


REVISIONS					
P	LTR	DESCRIPTION	DATE	OWN	APPRO
E		LC20-0031-16 / ECO-16-005675	14APR2016	DM	BJ
F		LC20-0085-16 / ECO-16-011010	21JUL2016	DM	BJ
G		LC20-0060-19 / ECO-19-010173	29JUN2019	DM	BJ

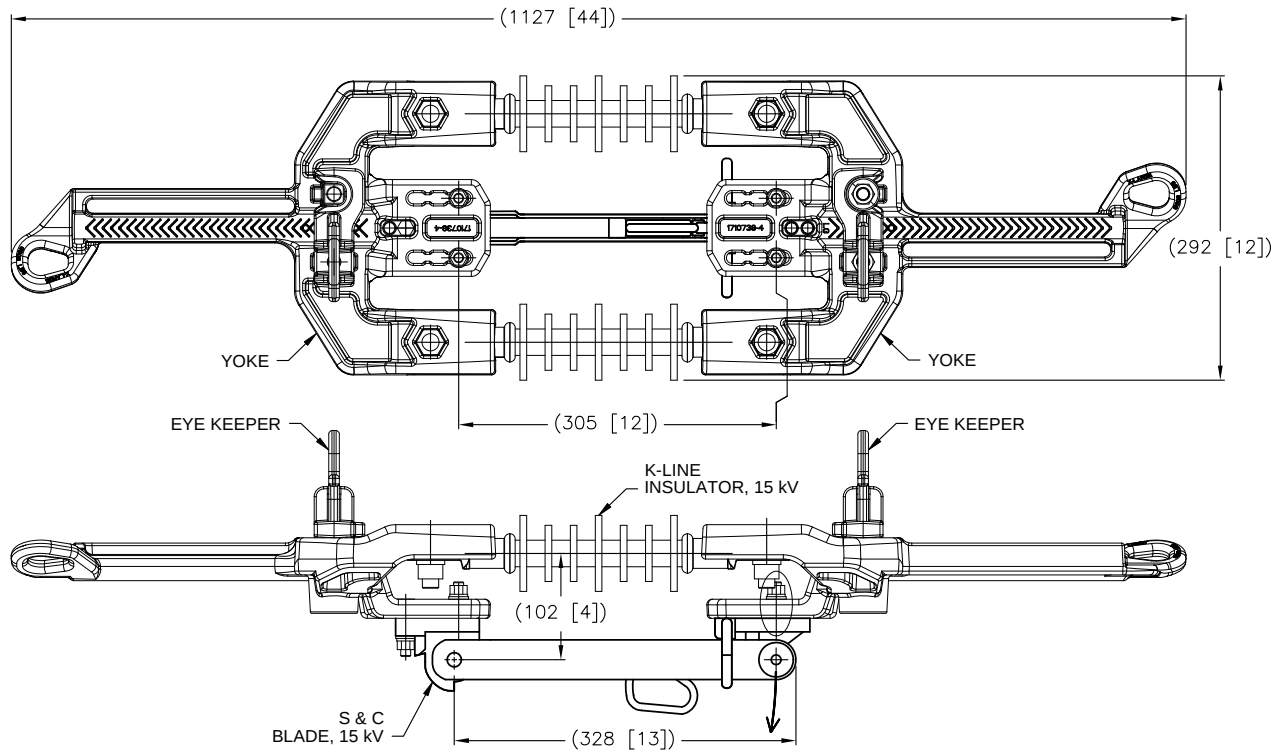

- BODY STRENGTH: 10,000 lbs.
PULLING EYE STRENGTH: 6000 lbs.
- 1710722-1 WILL BE REPLACED BY 1710722-6 IN THE FUTURE.

40,000 AMPERE RMS, ASYMMETRICAL	25,000 AMPERE RMS, SYMMETRICAL	900 AMPERE RMS	60 HERTZ	110 kV	15 kV AC
MOMENTARY CURRENT	THREE SECOND CURRENT	CONTINUOUS CURRENT ALLOWABLE RATING: (PER ANSI C37-32.3.2.1 2002)	FREQUENCY	BASIC IMPULSE INSULATION LEVEL (BIL)	VOLTAGE
RATINGS					

X-SMALL	1710722-6
XX-LARGE	1710722-5
X-LARGE	1710722-4
LARGE	1710722-3
SMALL	1710722-2
X-SMALL	1710722-1
YOKE SIZE IN ILD ASSEMBLY	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN D. MURUGIAH 12FEB2010	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK S. KAMEL 29MAR2010	NAME B. JOHNSON 29MAR2010	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC APPLICATION SPEC WEIGHT 0		
MATERIAL -		FINISH -		RESTRICTED TO -
CUSTOMER DRAWING		SCALE NTS	SHEET 1 of 1	REV G