
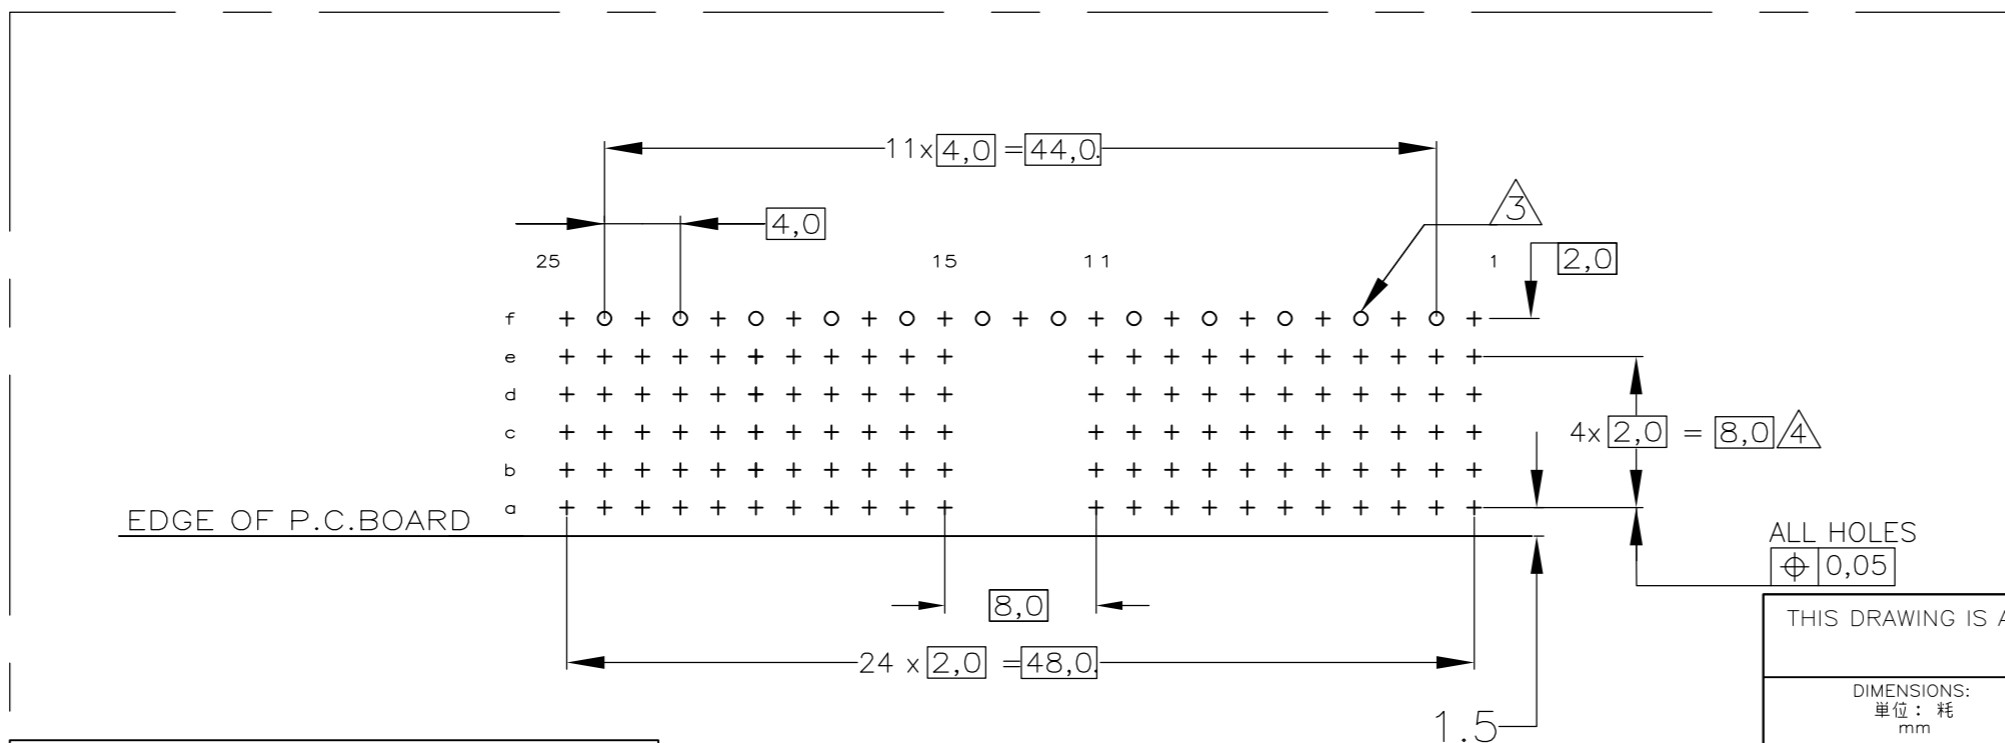
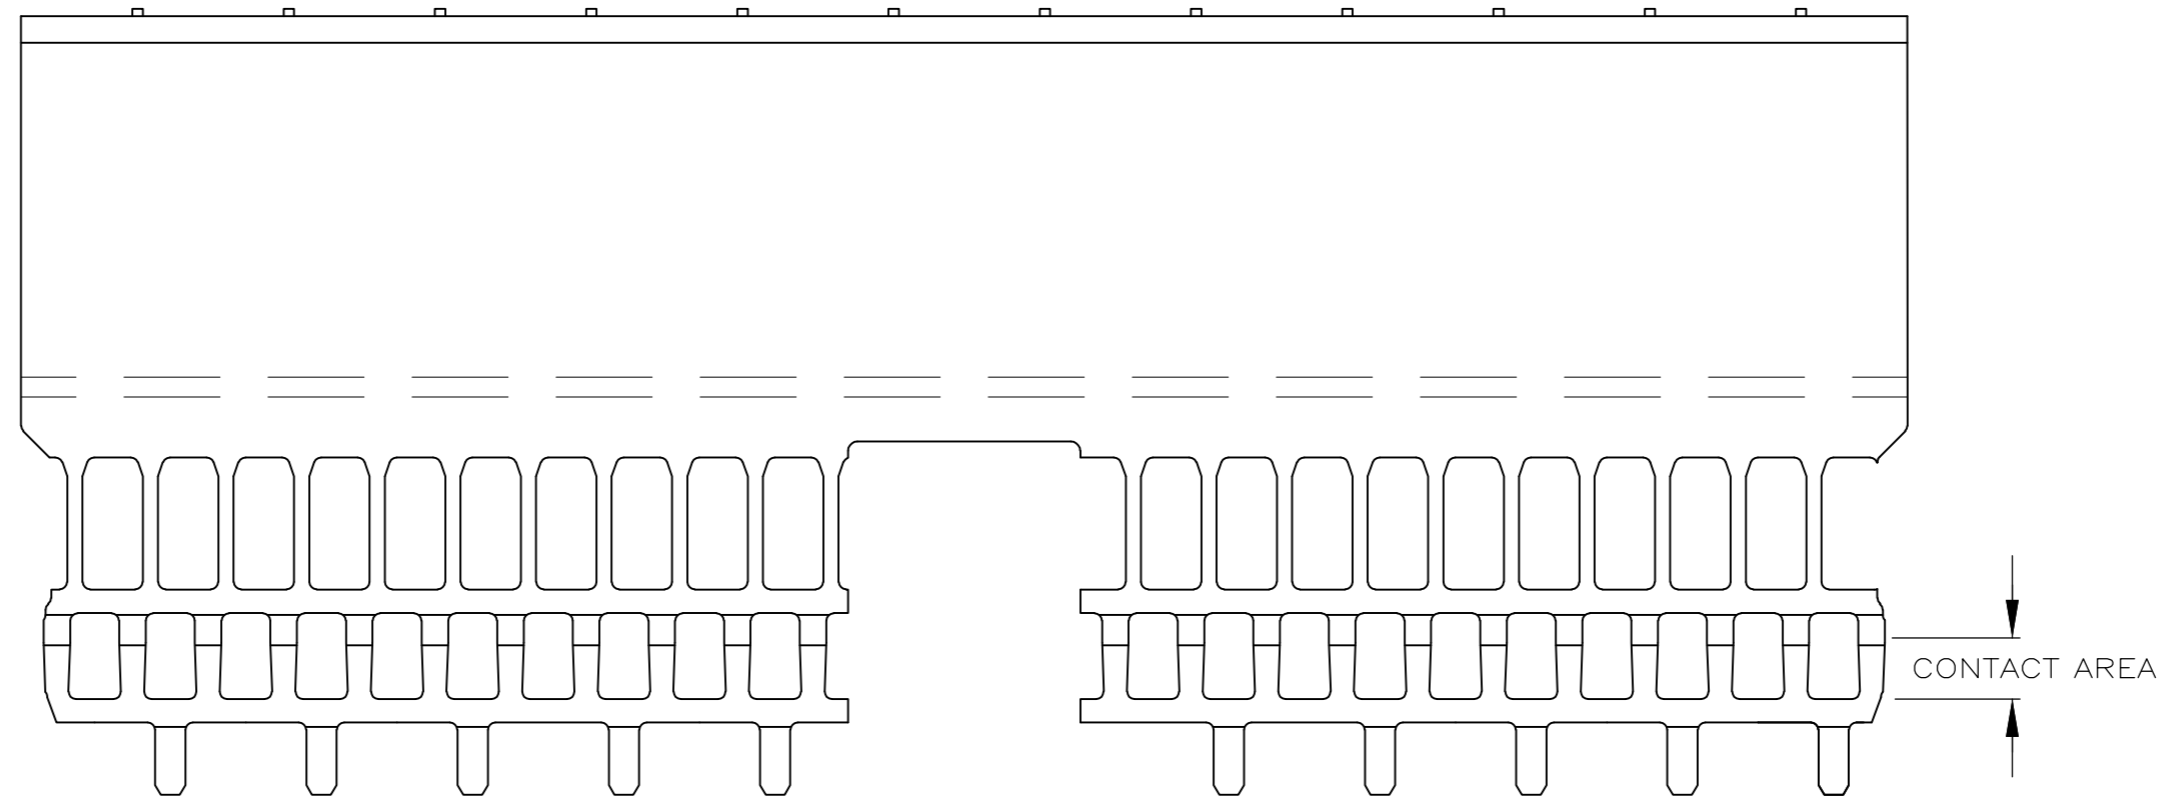
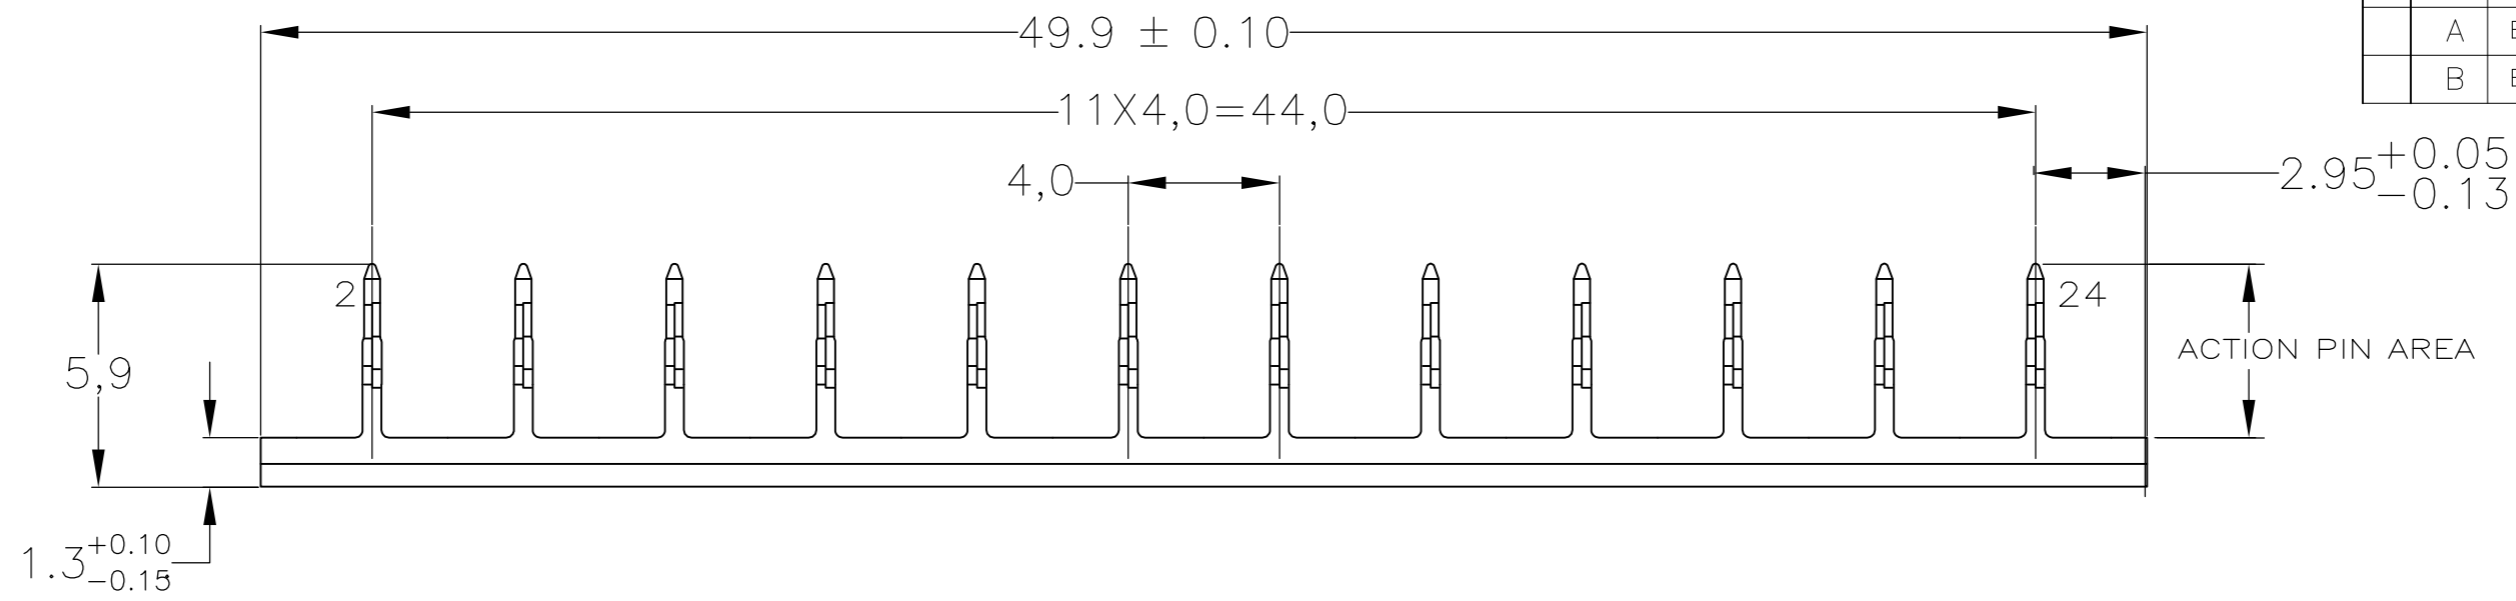


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
J	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		01		ECO-10-000444	19JAN10	KK	HMR
		A		ECR-12-007088	17APR2012	SY	AC
		B		ECR-12-009867	6NOV12	SY	AC

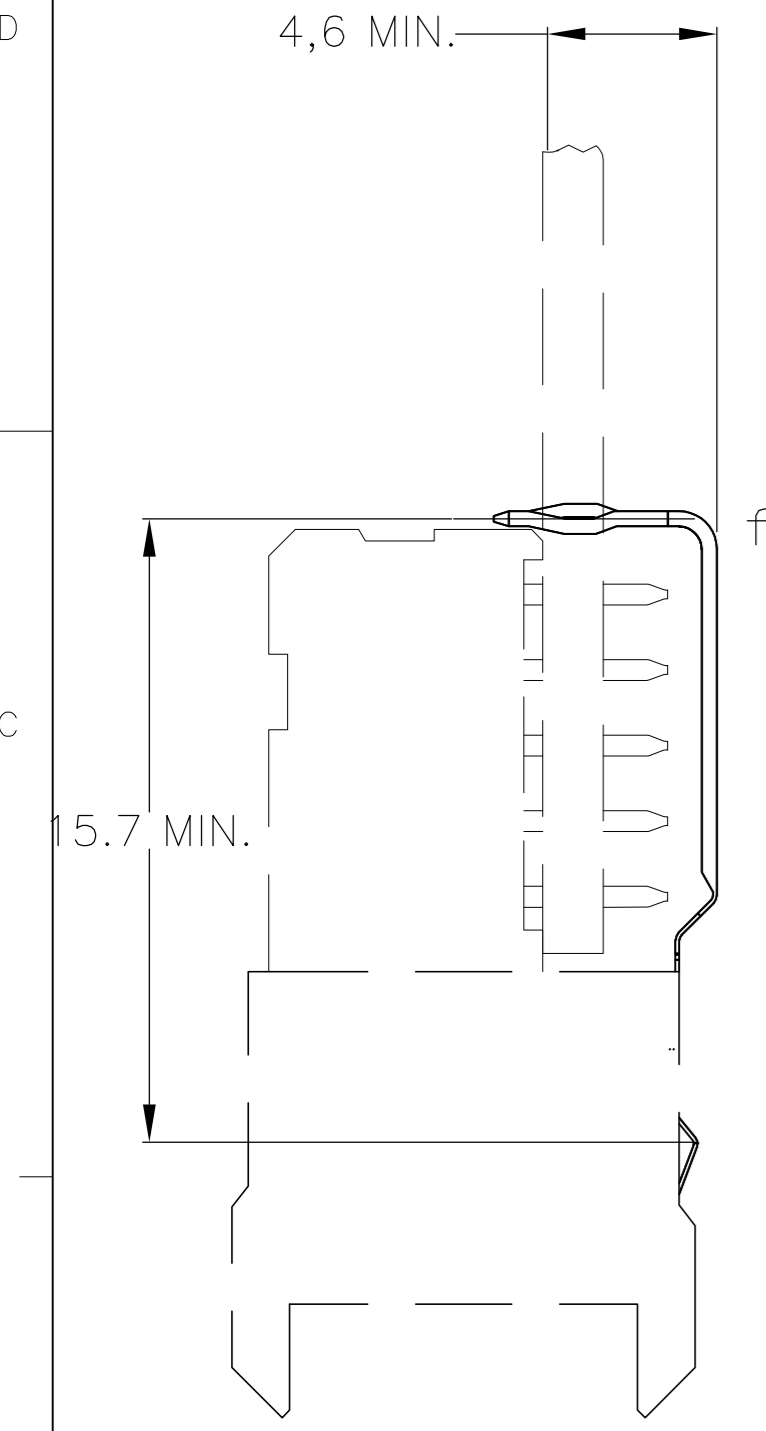

P.C.B. HOLE DIM. ACTION PIN
 FIN. HOLE : 0.55 TO 0.65 mm
 OTHER REQUIREMENTS: SEE APPLICATION SPECIFICATION 114-19029

COMPONENT SIDE AS SHOWN
 RECOMMENDED PCB-HOLE LAY-OUT

- △ PLATING:
 CONTACT AREA: 0,76 μm Au MIN. OVER 1,27μm Ni MIN.
 ACTION PIN : 0,5 μm SnPb MIN. (NO CONVERSION TO LEADFREE)
 REMAINDER : Ni
- △ MATERIAL; PHOSPHORBRONZE.
- △ ROW "f" 12 PLATED THROUGH HOLES FOR LOWERSHIELD.
- △ HOLE PATTERN FOR FEMALE CONNECTOR TYPE A WITH
 UPPERSHIELD, 110+13 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.
 5 MAX. BOARD THICKNESS 3,5 mm.
- △ PLATING:
 CONTACT AREA: 0,76 μm Au MIN. OVER 1,27μm Ni MIN.
 ACTION PIN : 0,5μm Sn MIN.
 REMAINDER : Ni
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	FINISH	MATERIAL	PART NUMBER
	△	△	1746790-2
	△	△	1746790-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.KATANO 31MAY04	Tyco Electronics AMP K.K. Kawasaki, Japan	
DIMENSIONS: 単位: 純 mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 ±0.3	CHK T.KIMURA 31MAY04	NAME 名称 Z-PACK 2mm HM GROUND RETURN LOWERSHIELD TYPE A	
0-PLC ± 1-PLC ± 2-PLC ± 3-PLC ± 4-PLC ± ANGLES ± 3°		APVD K.IKEGAMI 31MAY04	SIZE A2	CAGE CODE 00779
MATERIAL 材料	FINISH 仕上	PRODUCT SPEC 製品規格 108-19082	DRAWING NO 番号 114-19029	RESTRICTED TO —
CUSTOMER DRAWING		WEIGHT —	SCALE 尺度 5:1	SHEET 1 OF 1