

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REV PER ECO 17-016276	11-7-17	CT	FB




1 MATERIALS:
BODY AND CONTACT: BERYLLIUM COPPER
PER ASTM B-196
DIELECTRIC: TEFLON PER ASTM D-1710

2 FINISHES:
BODY AND CONTACT: GOLD PLATE PER
ASTM B-488

3. SMPM FEMALE INTERFACE PER
MIL-STD-348A

4, FOR USE WITH Ø.047 SEMI-RIGID CABLE


5 PRESSFIT END CAP SHIPPED UNASSEMBLED

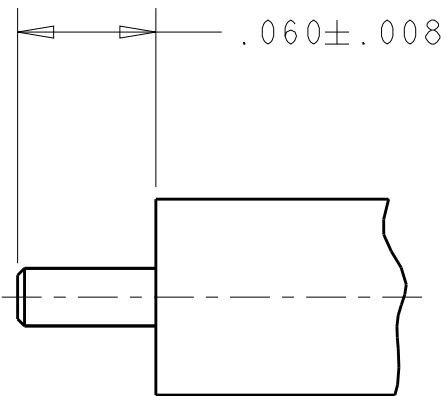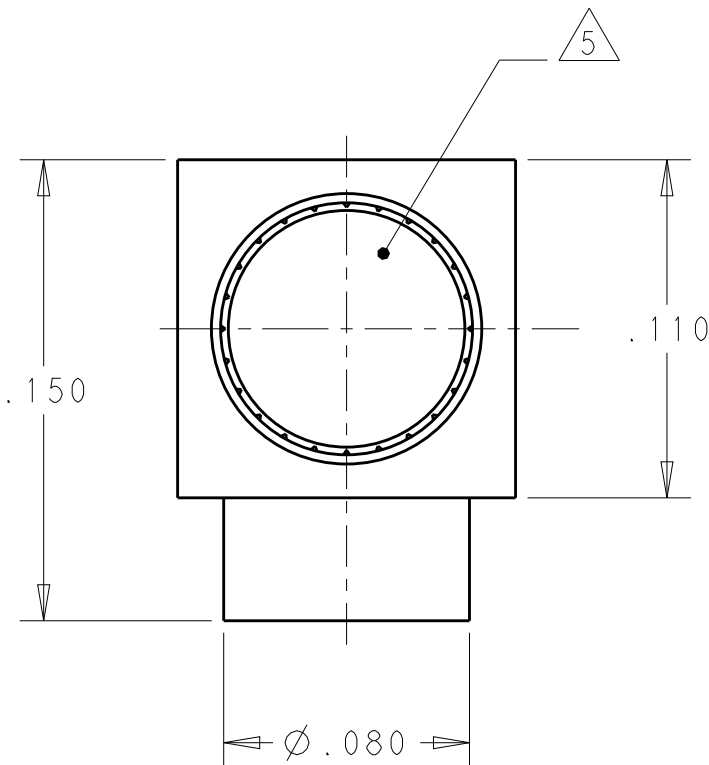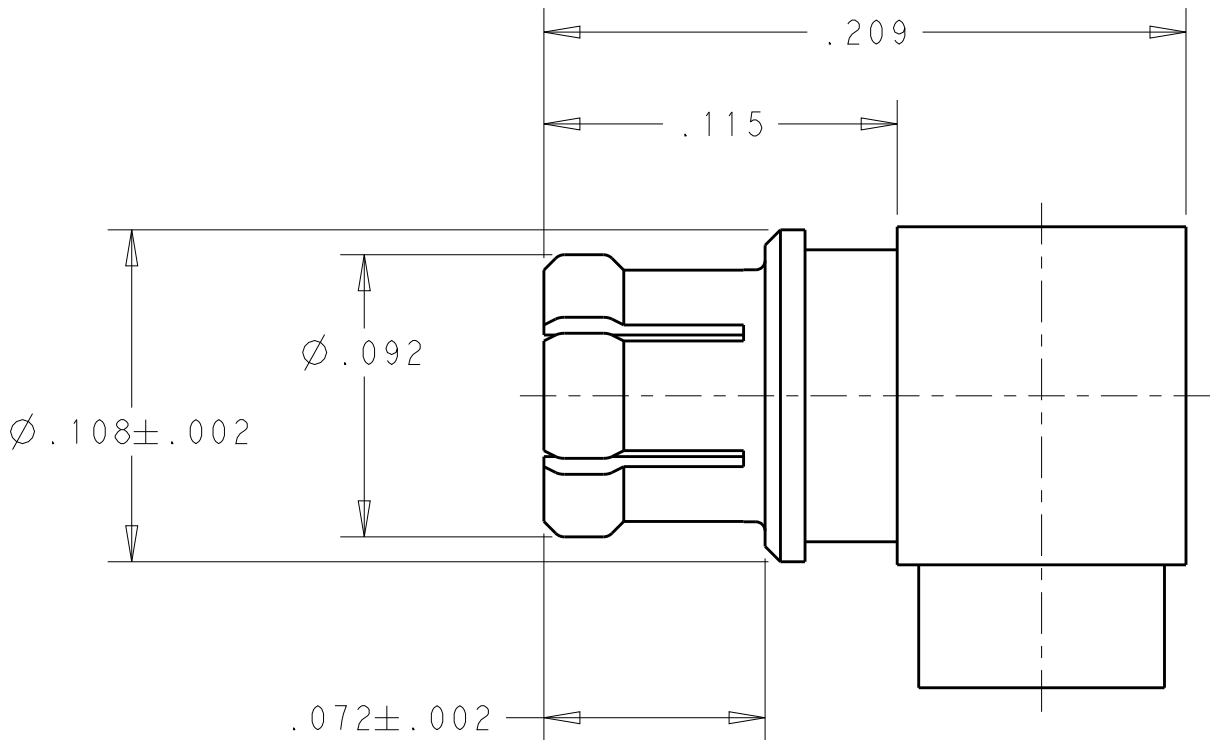

RECOMMENDED CABLE STRIP LENGTHS

THIS DRAWING IS A CONTROLLED DOCUMENT.
DIMENSIONING AND TOLERANCING
PER ASME Y14.5M-2009

DIMENSIONS:
INCHES



TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±.1
1 PLC ±.1
2 PLC ±.02
3 PLC ±.005
4 PLC ±.0005
ANGLES ±.

MATERIAL

material_2

FINISH

finish_spec_2

DWN B. MOYER 29JAN2007

CHK R. GROSS 29JAN2007

APVD R. GROSS 29JAN2007

PRODUCT SPEC

108-2326

APPLICATION SPEC

-

WEIGHT

-

CUSTOMER DRAWING



TE Connectivity

NAME
CABLE JACK, RIGHT
ANGLE, .047 SEMI-RIGID,
SMPM

SIZE

CAGE CODE

DRAWING NO

A300779

C-1757643

RESTRICTED TO

-

SCALE 14:1

SHEET 1 OF 1

REV D