
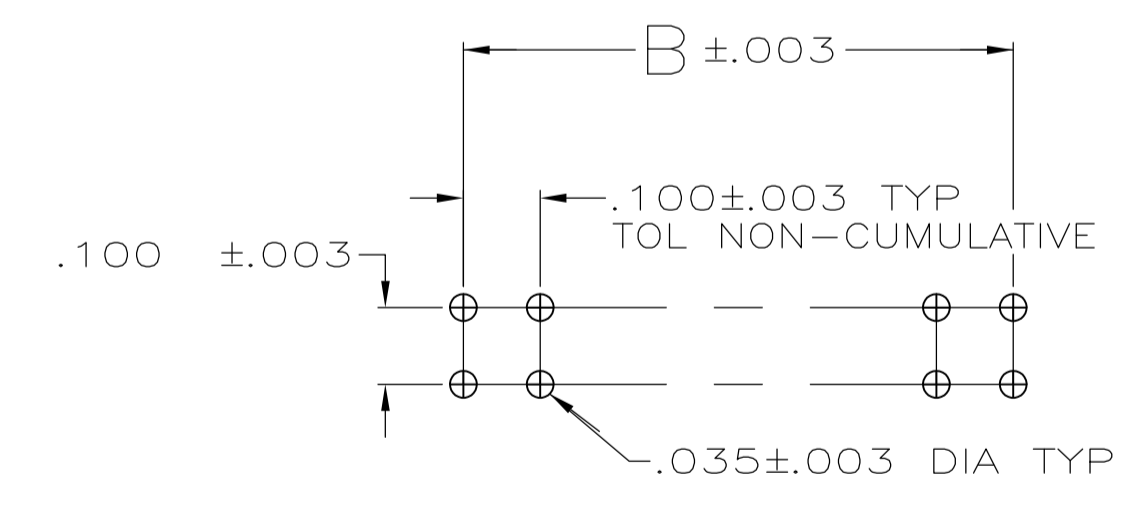
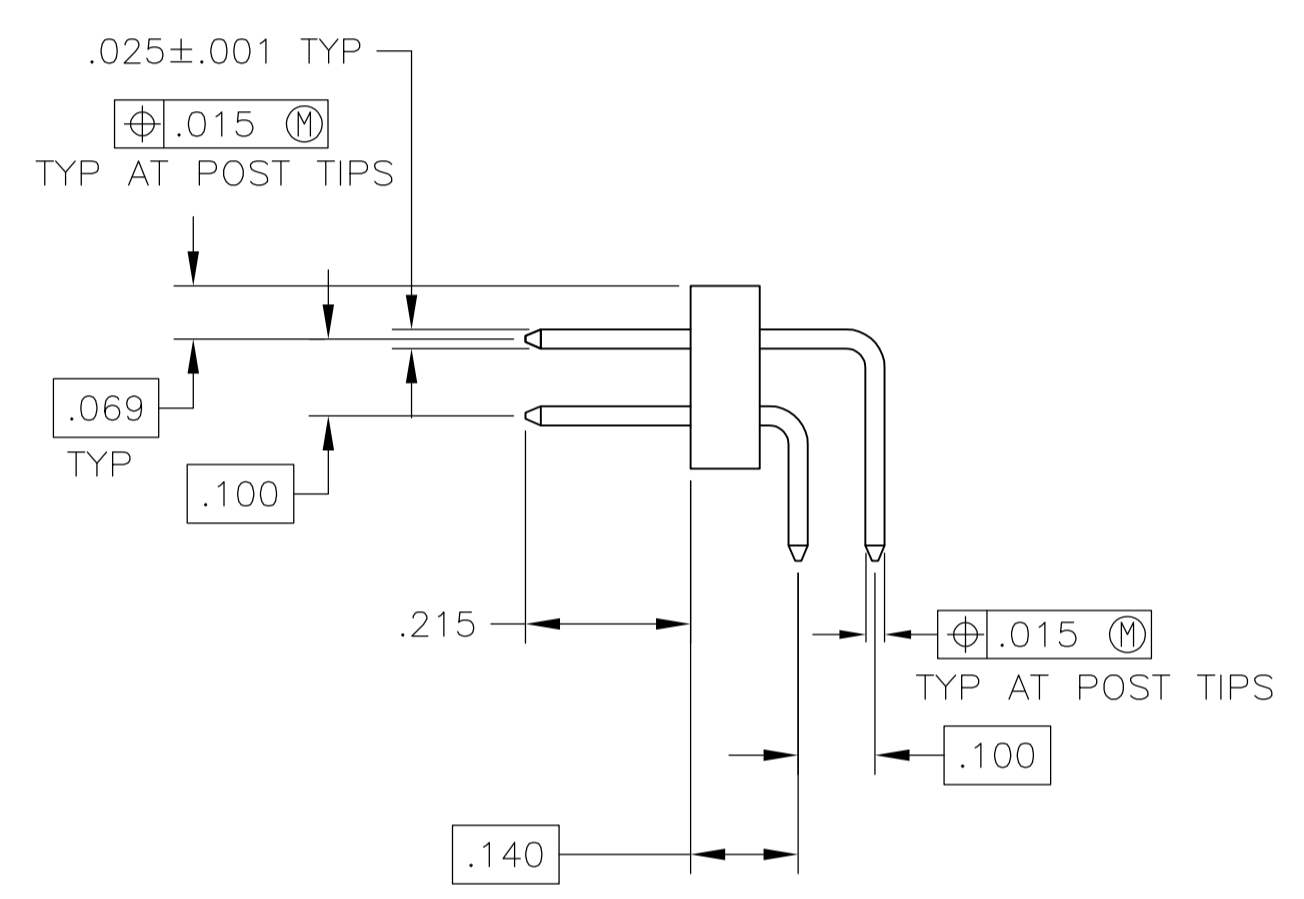


- 1 ASSEMBLIES MAY BE BROKEN TO DESIRED NO OF POSITIONS.
- 2 BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 3 HOUSING: FLAME-RETARDANT THERMOPLASTIC, COLOR-BLACK
POST: COPPER ALLOY
- 4 POST: .000100-.000200 MATTE TIN-LEAD OVER .000050 MIN NICKEL
- 5 POST: .000100-.000200 MATTE TIN OVER .000050 MIN NICKEL

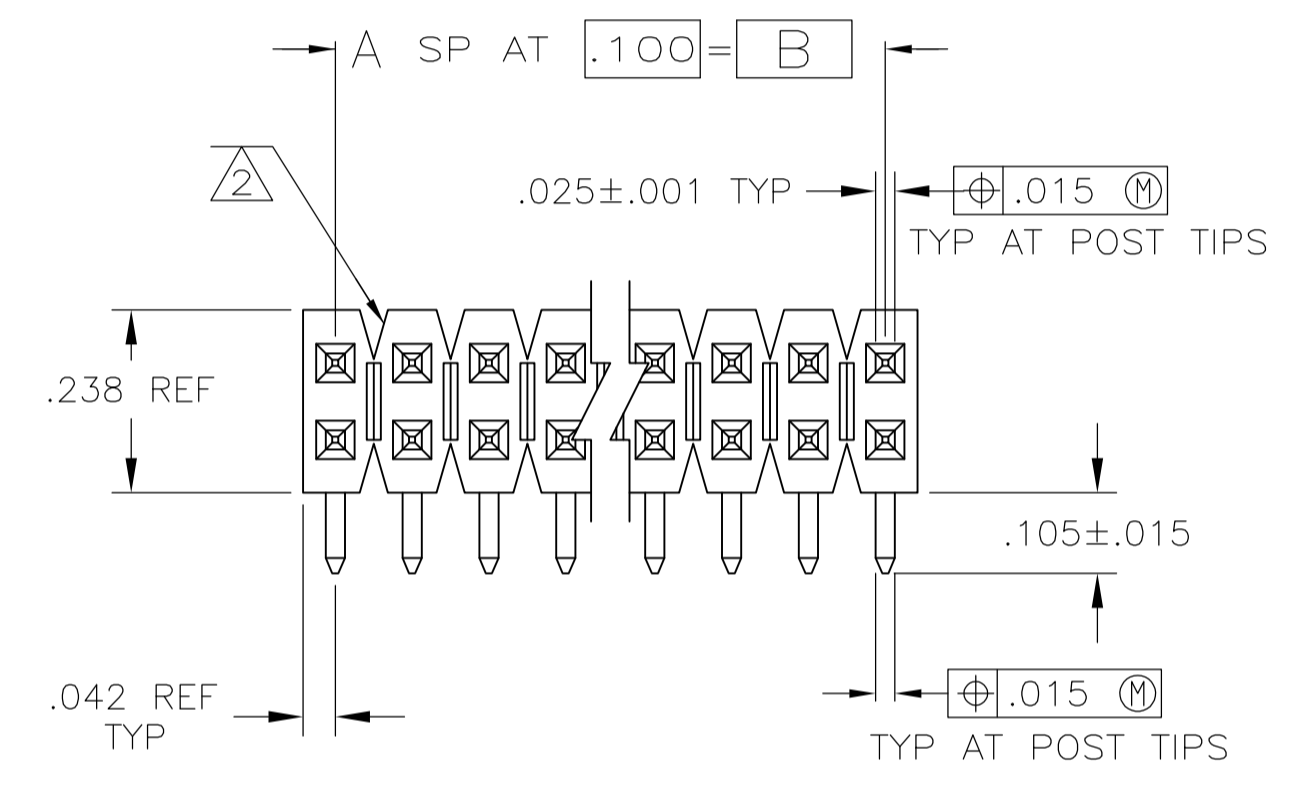

RECOMMENDED HOLE LAYOUT

| | | | | | |
|---------|-------|-------|----|------------|-------------|
| 5 | 2.484 | 2.400 | 24 | 50 | 5-1825144-1 |
| 4 | 2.484 | 2.400 | 24 | 50 | 1825144-1 |
| PLATING | C | B | A | NO OF POSN | PART NUMBER |

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|---|--|---|-----------------|--------------|---|---|--------|---|---|--------|---|------|--------|---|---|--------|---|---|---|--|------|---|------|---|--------------|---|------------------|---|------|---|--------|---|---|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DIN M. BINNER 11JAN05 | | TE Connectivity | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DIMENSIONS: INCHES | | TOLERANCES UNLESS OTHERWISE SPECIFIED: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <tr><td>0. PLC</td><td>±</td><td>-</td></tr> <tr><td>1. PLC</td><td>±</td><td>-</td></tr> <tr><td>2. PLC</td><td>±</td><td>-</td></tr> <tr><td>3. PLC</td><td>±</td><td>.005</td></tr> <tr><td>4. PLC</td><td>±</td><td>-</td></tr> <tr><td>ANGLES</td><td>±</td><td>-</td></tr> </table> | | 0. PLC | ± | - | 1. PLC | ± | - | 2. PLC | ± | - | 3. PLC | ± | .005 | 4. PLC | ± | - | ANGLES | ± | - | <table border="1"> <tr><td>APVD</td><td>-</td></tr> <tr><td>NAME</td><td>-</td></tr> <tr><td>PRODUCT SPEC</td><td>-</td></tr> <tr><td>APPLICATION SPEC</td><td>-</td></tr> <tr><td>SIZE</td><td>-</td></tr> <tr><td>WEIGHT</td><td>-</td></tr> </table> | | APVD | - | NAME | - | PRODUCT SPEC | - | APPLICATION SPEC | - | SIZE | - | WEIGHT | - | ASSEMBLY, HEADER, BREAKAWAY, MOD II, DOUBLE ROW, .100 X .100CL, RIGHT ANGLE, WITH .025 SQUARE POSTS | |
| 0. PLC | ± | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1. PLC | ± | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2. PLC | ± | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3. PLC | ± | .005 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4. PLC | ± | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANGLES | ± | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| APVD | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| NAME | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PRODUCT SPEC | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| APPLICATION SPEC | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SIZE | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| WEIGHT | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MATERIAL: SEE TABLE | | CUSTOMER DRAWING | | SCALE: 4:1 | SHEET 1 OF 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |