


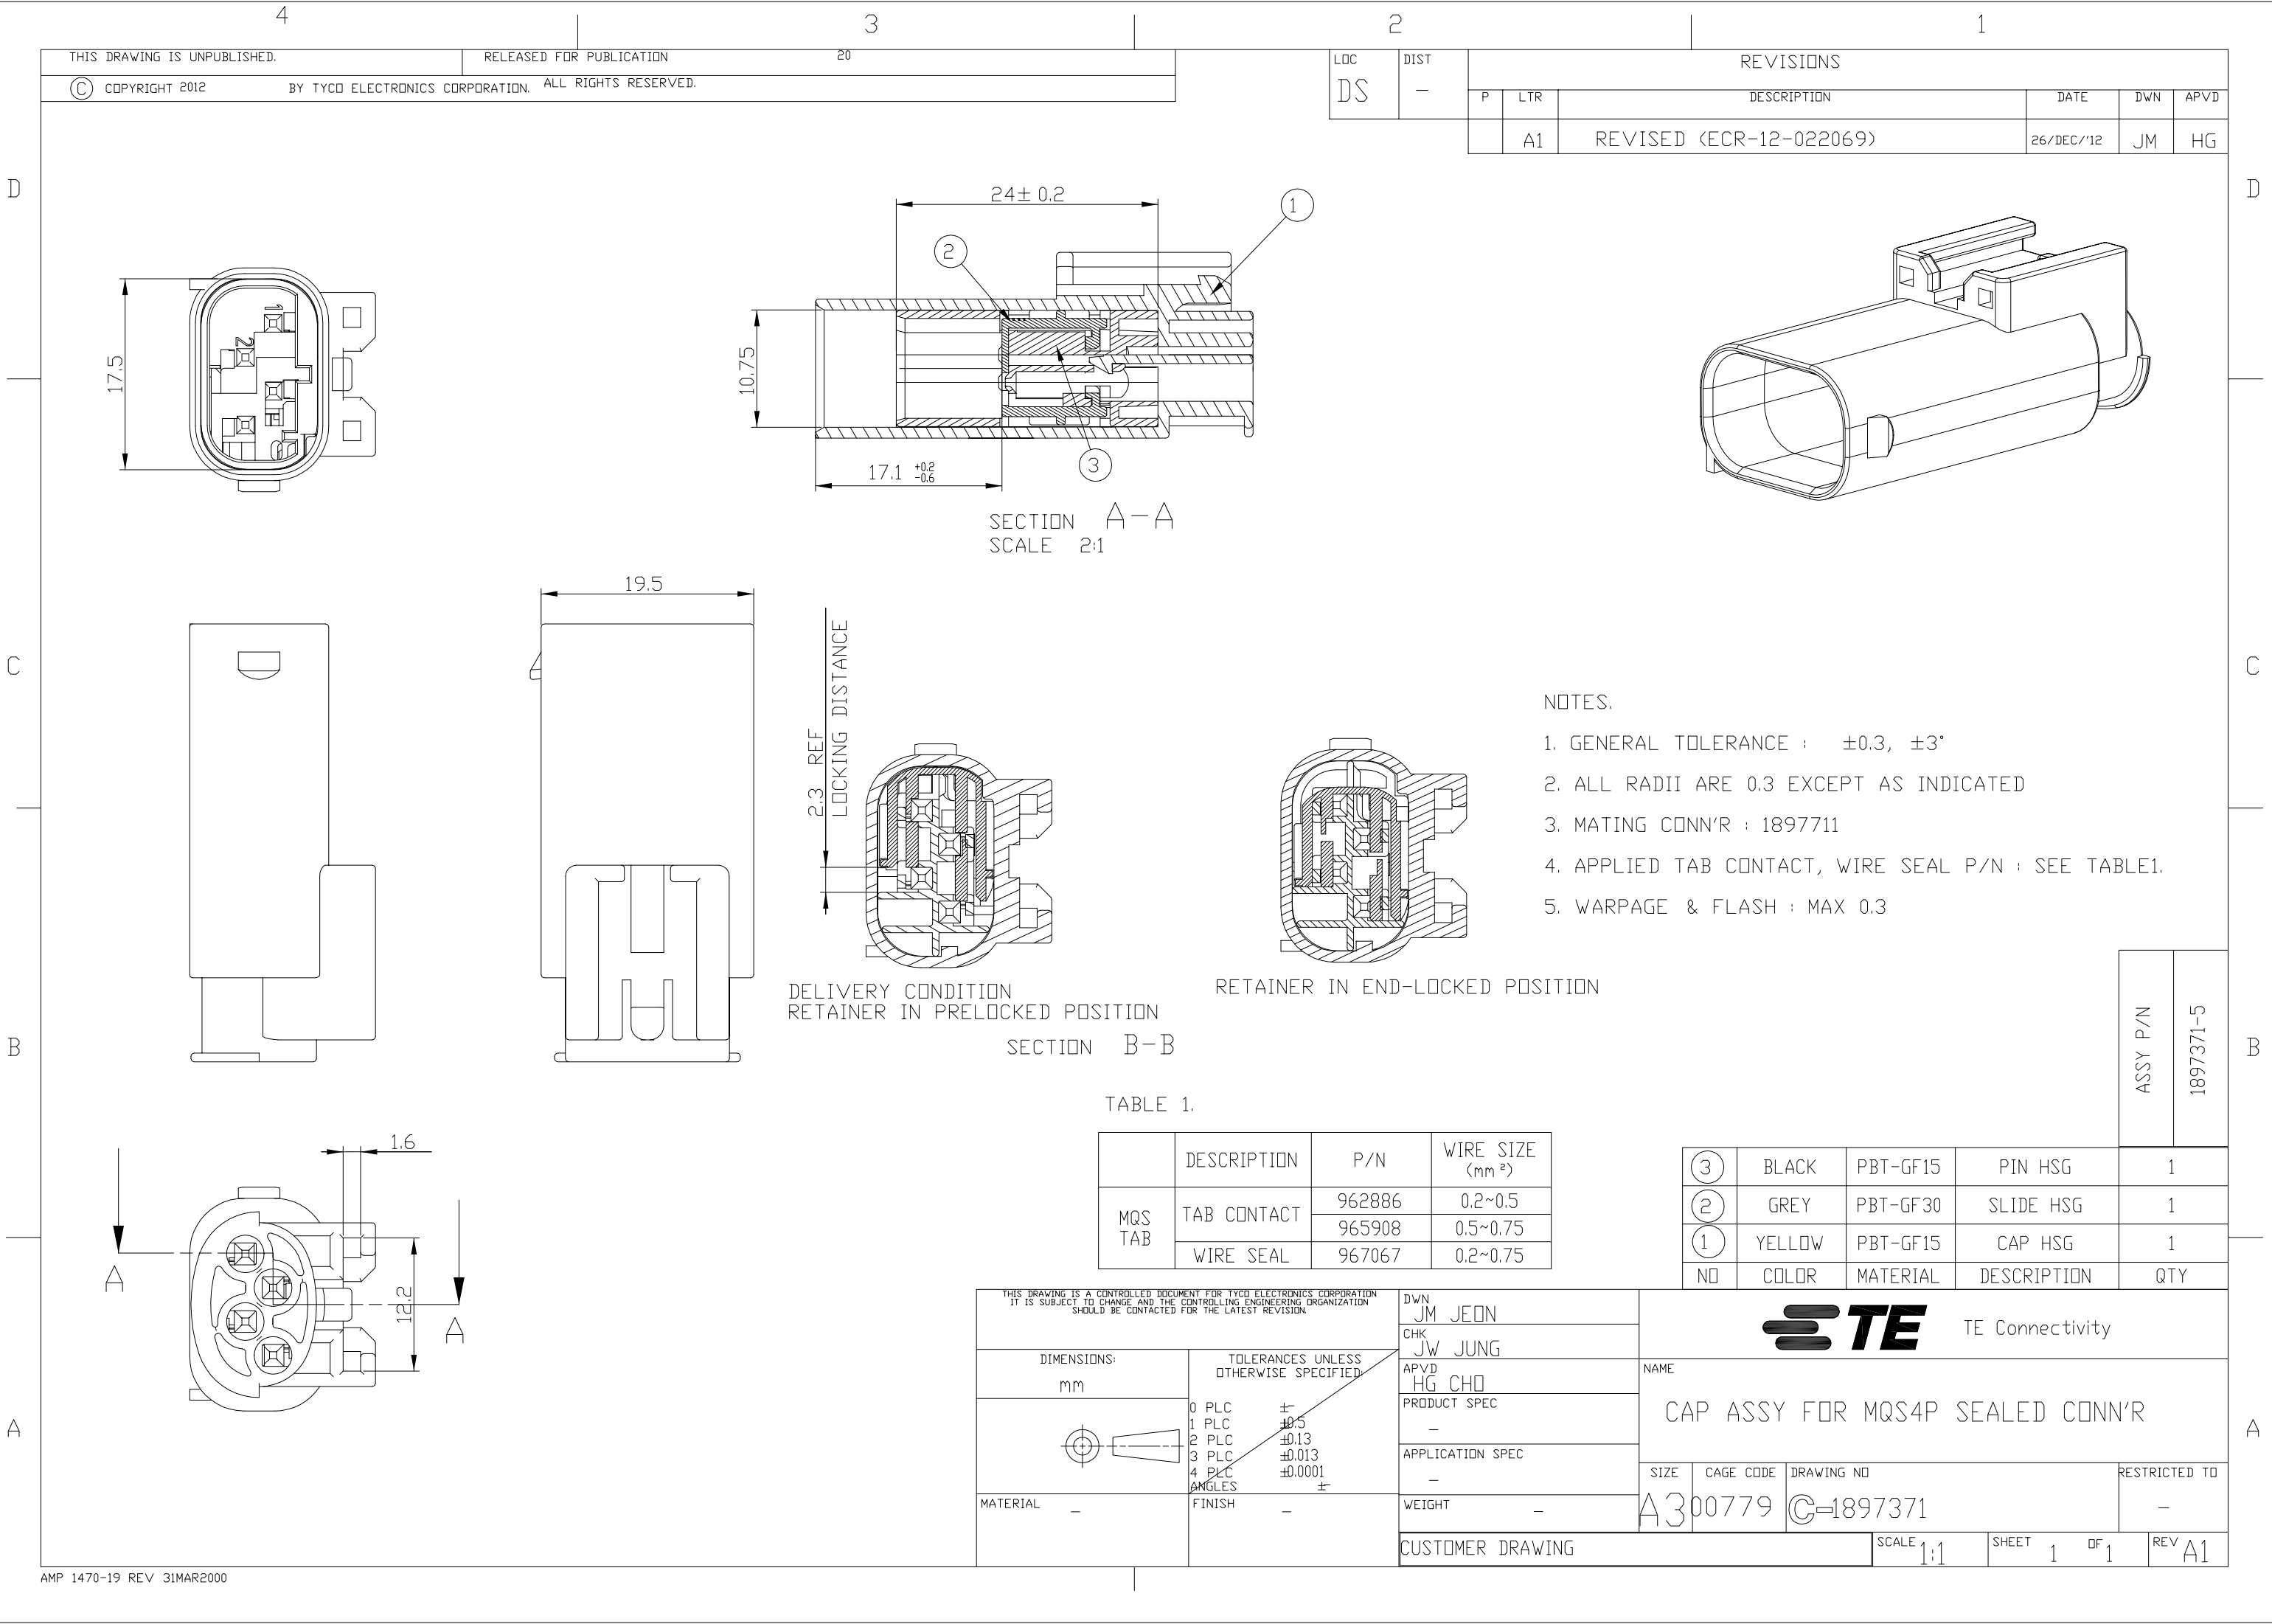

THIS DRAWING IS UNPUBLISHED.
RELEASED FOR PUBLICATION
20
COPYRIGHT 2012 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC DS	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			A1	REVISED (ECR-12-022069)	26/DEC/12	JM	HG

- NOTES.
- 1. GENERAL TOLERANCE : ±0.3, ±3°
 - 2. ALL RADII ARE 0.3 EXCEPT AS INDICATED
 - 3. MATING CONN'R : 1897711
 - 4. APPLIED TAB CONTACT, WIRE SEAL P/N : SEE TABLE1.
 - 5. WARPAGE & FLASH : MAX 0.3

DELIVERY CONDITION
RETAINER IN PRELOCKED POSITION
SECTION B-B

RETAINER IN END-LOCKED POSITION

TABLE 1.

	DESCRIPTION	P/N	WIRE SIZE (mm ²)
MQS TAB	TAB CONTACT	962886	0.2~0.5
		965908	0.5~0.75
	WIRE SEAL	967067	0.2~0.75

③	BLACK	PBT-GF15	PIN HSG	1
②	GREY	PBT-GF30	SLIDE HSG	1
①	YELLOW	PBT-GF15	CAP HSG	1
NO	COLOR	MATERIAL	DESCRIPTION	QTY

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN JM JEON CHK JW JUNG APVD HG CHO PRODUCT SPEC - APPLICATION SPEC - WEIGHT -		NAME CAP ASSY FOR MQS4P SEALED CONN'R	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
	0 PLC ±0.5 1 PLC ±0.5 2 PLC ±0.13 3 PLC ±0.013 4 PLC ±0.0001 ANGLES ±	A3	00779	C-1897371	-
MATERIAL -	FINISH -	CUSTOMER DRAWING		SCALE 1:1	SHEET 1 OF 1
				REV A1	

