


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14	B	REVISED PER ECO-14-015277	24FEB2015	NK DR

AMP
WIRE RANGE

16 AWG
STRANDED

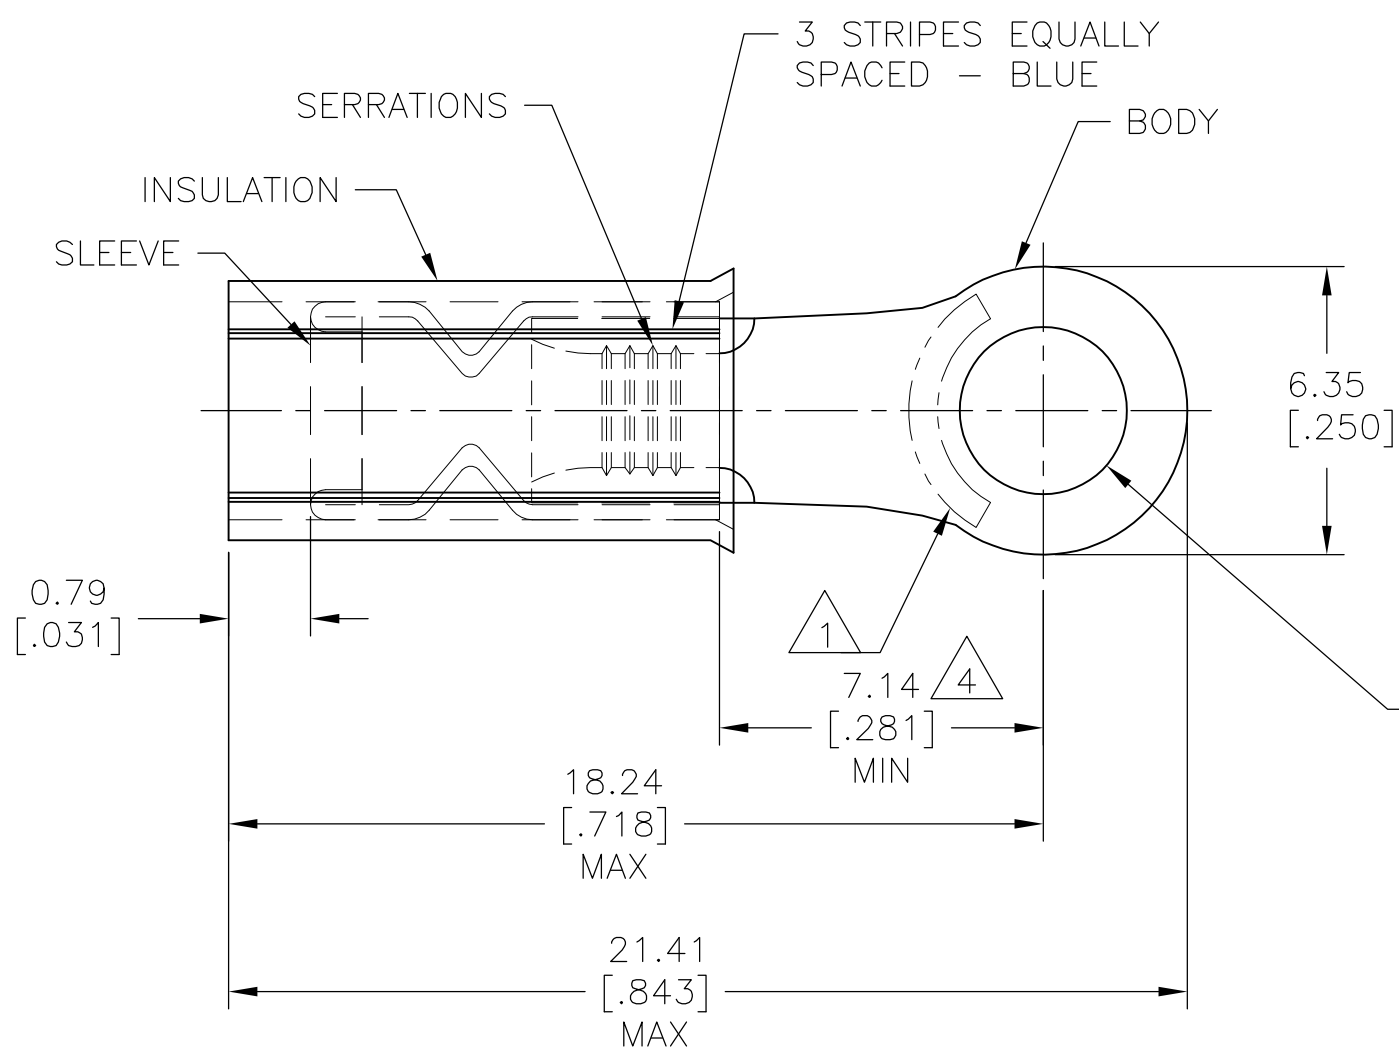

- 1 STAMP AMP 16-14* APPROX AS SHOWN
TERMINAL IS A 16 IR AND ACCEPTS 16AWG WIRE ONLY.
- 2 WIRE INSUL DIA: 1.60-3.30[.063-.130].
- 3 TONGUE MATERIAL THK, 0.79±0.05[.031±.002].
- 4 APPLIES FROM EDGE OF METAL WIRE BARREL
TO CENTER OF STUD HOLE.

∅3.68±0.08
[∅.145±.003]
FOR M3.5[#6] STUD

1000	LOOSE PIECE	1958448-1
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEM		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C[221°F]	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN KIRAN HOLAL 08FEB2013	TE Connectivity NAME TERMINAL, RING TONGUE, PIDG™, IR WIRE SIZE: 16 AWG								
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752		VOLTAGE RATING: 300V MAX	DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:				CHK ROHDE, DANIEL 08FEB2013	APVD ROHDE, DANIEL 08FEB2013	PRODUCT SPEC			
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 1.42mm²[2800] CIR MIL STRANDED		0 PLC ± -	1 PLC ± -	2 PLC ± 0.20[.008]	3 PLC ± -	4 PLC ± -	ANGLES ± -	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
FOR ORDER ENTRY	1-800-526-5142			MATERIAL BODY&SLV: COPPER PER ASTM B152 INSUL: NYLON, COLOR:BLUE	FINISH BODY&SLV: TIN PLATE PER ASTM B545	WEIGHT	—	A3	00779	C-1958448	—	CUSTOMER DRAWING	SCALE 4:1	SHEET 1 OF 1