
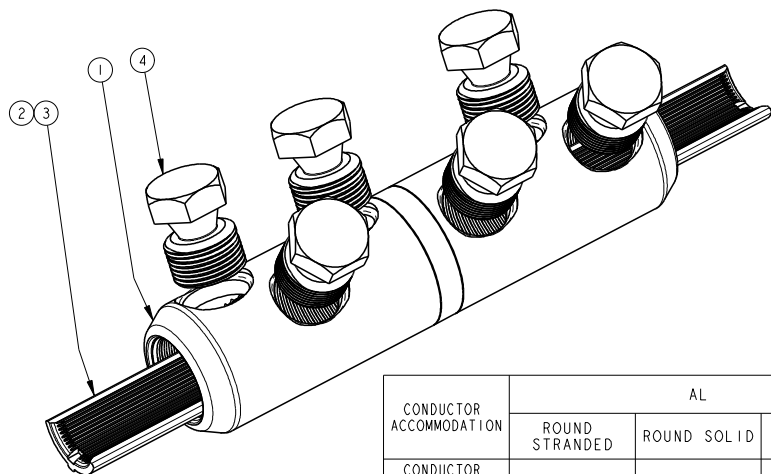
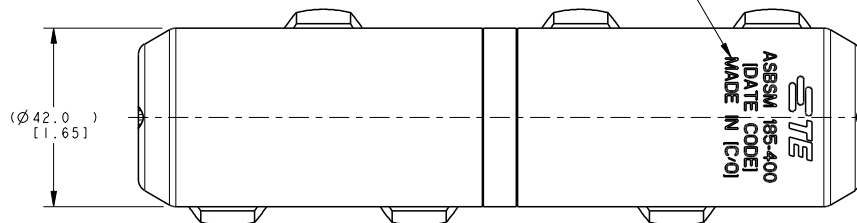
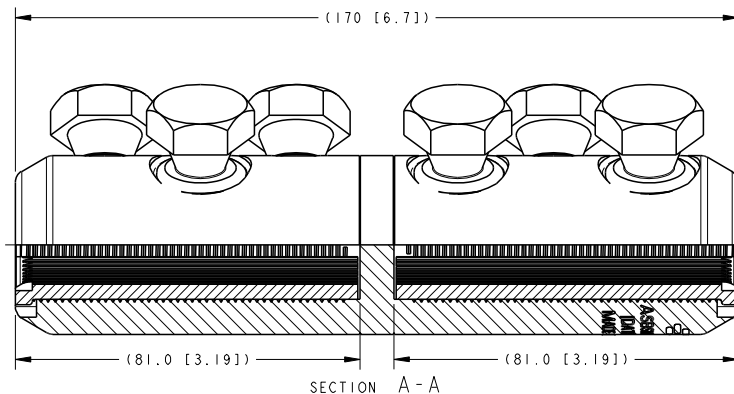


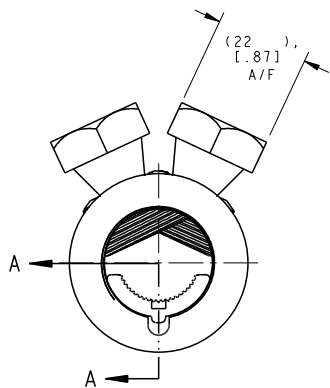

CONDUCTOR ACCOMMODATION	AL			CU	
	ROUND STRANDED	ROUND SOLID	SECTOR STRANDED	ROUND STRANDED	SECTOR STRANDED
CONDUCTOR CROSS-SECTION, [sq. mm]	185-400	185-400	185-240	185-400	185-240
CONDUCTOR DIAMETER, [mm]	Ø15.5-Ø24.6	Ø14.8-Ø24.6	-	Ø15.5-Ø24.6	-

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN D. MURUGIAH	15MAY2012
DIMENSIONS: mm [INCH]		CHK A. BULZA	15MAY2012
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD B. JOHNSON	15MAY2012
MATERIAL		PRODUCT SPEC	
SEE BOM		APPLICATION SPEC	
SEE BOM		WEIGHT	
SEE BOM		CUSTOMER DRAWING	

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
A		INITIAL REL. PER LC20-0047-12	14MAY2012	DM	BJ
B		LC20-0058-12 / ECO-12-010516	04JUN2012	DM	BJ

MARKING:



ASBSM 185-400
[DATE CODE]
MADE IN [COUNTRY OF ORIGIN]

- ALL DIMENSIONS ARE FOR REFERENCE ONLY.
- CONNECTOR CONTAINS FACTORY APPLIED ANTI-OXIDE INHIBITOR.
- FINISH:
ELECTRO-TIN PLATED.
- INSTALL BOLTS WITH 22 mm HEX SOCKET.

ASBSM 185-400	1974166-1
CATALOG NO.	PART NO.

1	INSTALLATION INSTRUCTION SHEET, 408-32055	6
1	ABRASIVE TAPE	5
6	MULTI SHEAR HEAD BOLT, M22, ALUMINUM ALLOY	4
A/R	INHIBITOR	3
2	INSERT, ALUMINUM ALLOY, TIN PLATED	2
1	CONNECTOR SLEEVE BODY, ALUMINUM ALLOY, TIN PLATED	1
-1	DESCRIPTION	ITEM NO
QTY	PARTS LIST	



TE Connectivity

SHEARBOLT SLEEVE CONNECTOR, ALUMINUM,
SOLID OIL STOP,
ASBSM 185-400

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	1974166	-
SCALE	NTS	SHEET	OF
		1	1
		REV	B