


LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			1	NEW DRAWING	14JUN12	KH	MS

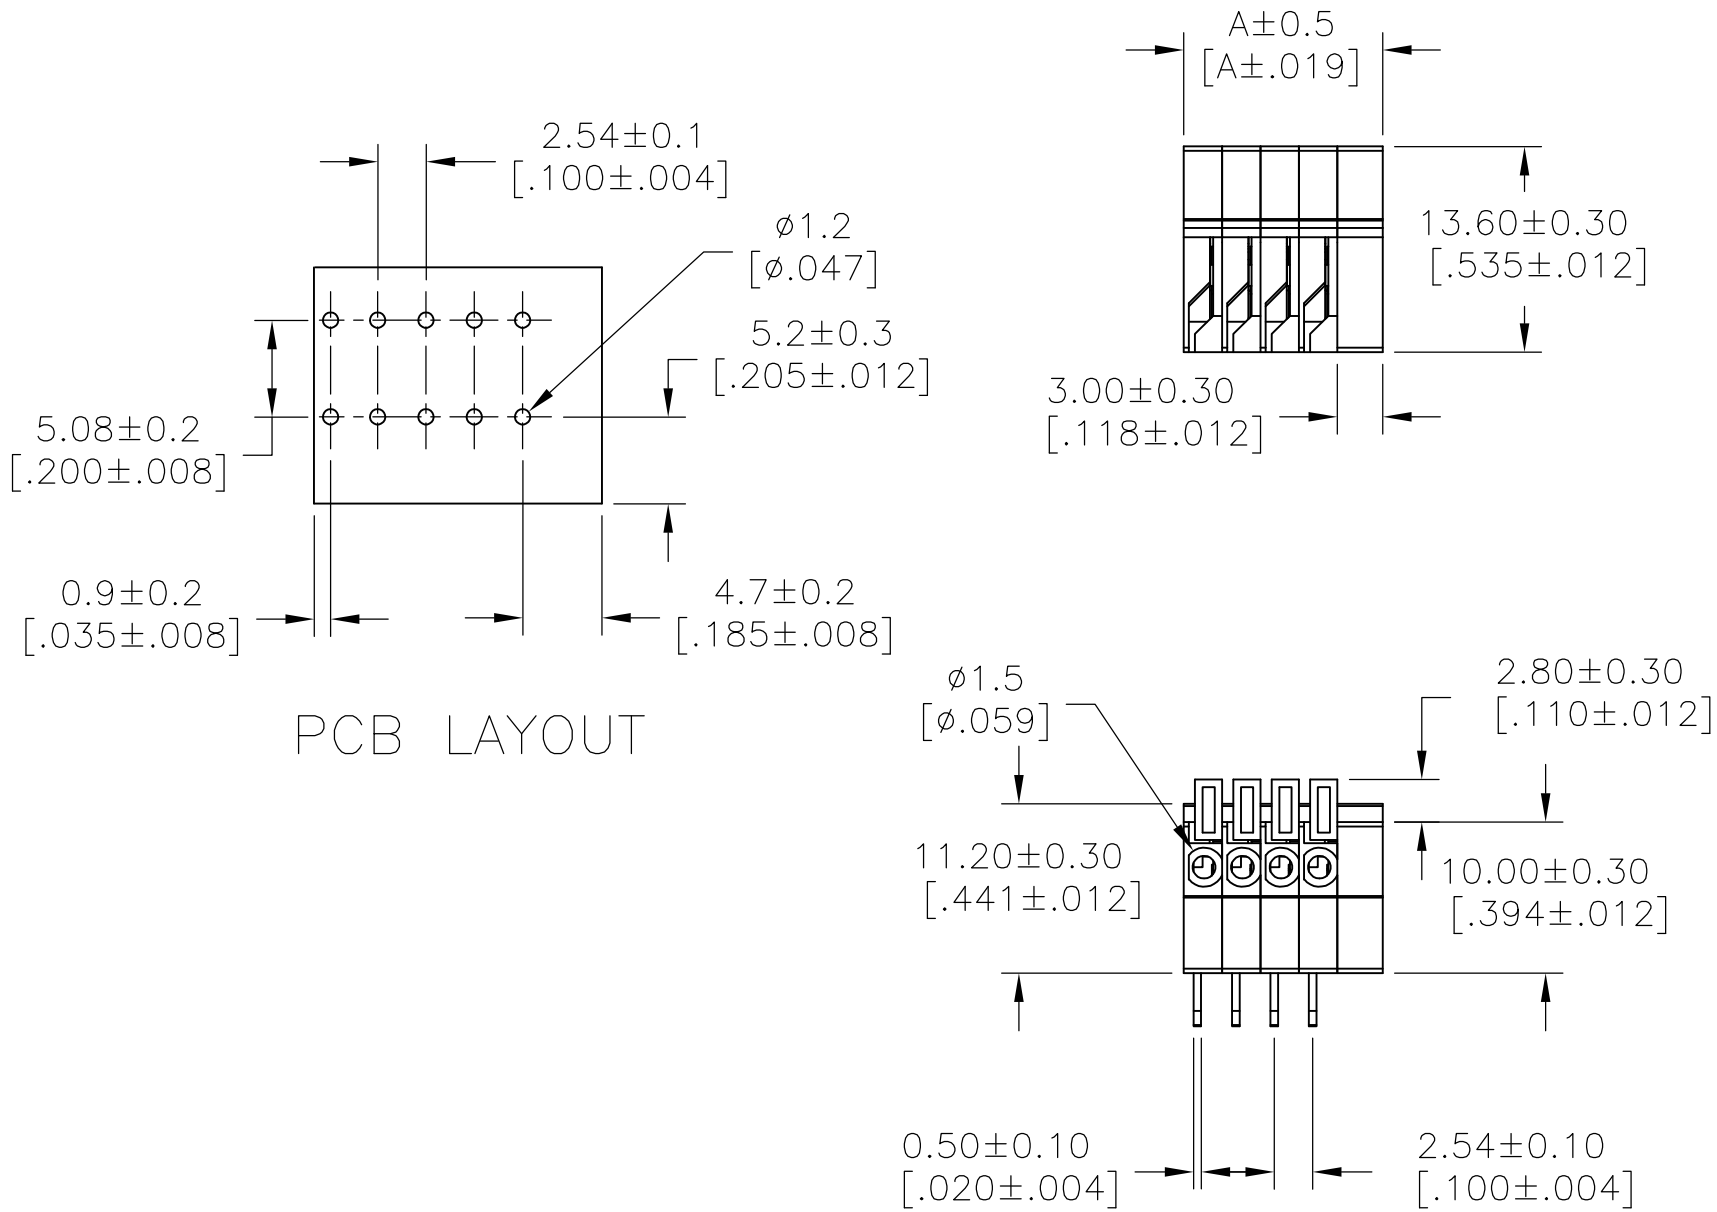


MATERIALS:
HOUSING—POLYAMIDE 66 94V-0, COLOR—GREEN
COVER—POLYAMIDE 66 94V-0, COLOR—GREEN
LEVER—POLYAMIDE 66 94V-0, COLOR—ORANGE
TERMINAL—COPPER ALLOY—LEAD FREE TIN PLATED
CLAMPING SPRING—STAINLESS STEEL

MECHANICAL:
STRIPPING LENGTH—10MM
OPERATING TEMPERATURE -40°C TO +105°C

ELECTRICAL:
WIRE SIZE = 20 TO 26 AWG SOLID OR STRANDED
VOLTAGE RATING - 150 VOLTS AC
CURRENT RATING - 6AMP
INSULATION RESISTANCE - 2000MEGAOHMS @500VDC

PITCH=2.54MM

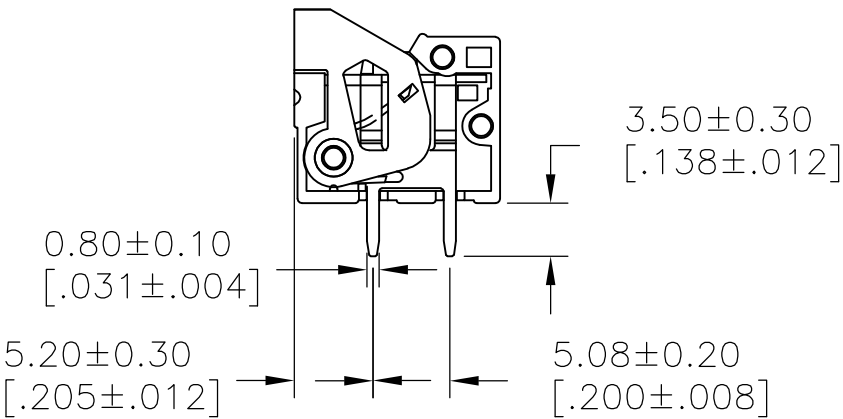

PRELIMINARY - NOT RELEASED
FOR PRODUCTION

43.64[1.718]	16	1-1986762-6
33.48[1.318]	12	1-1986762-2
DIM A +/-0.5	POLE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN KIRAN HOLAL 14JUN12	 TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK SARVER MICHAEL 14JUN12				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD SARVER MICHAEL 14JUN12	NAME			
0 PLC ± - 1 PLC ± 0.10[.004] 2 PLC ± 0.10[.004] 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC	PCB MOUNT SIDE ENTRY SPRING TYPE, 2.54mm			
MATERIAL		FINISH	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
-		-	A3	00779	C-1986762	-
CUSTOMER DRAWING			SCALE	SHEET	REV	
			2:1	1 OF 1	1	