

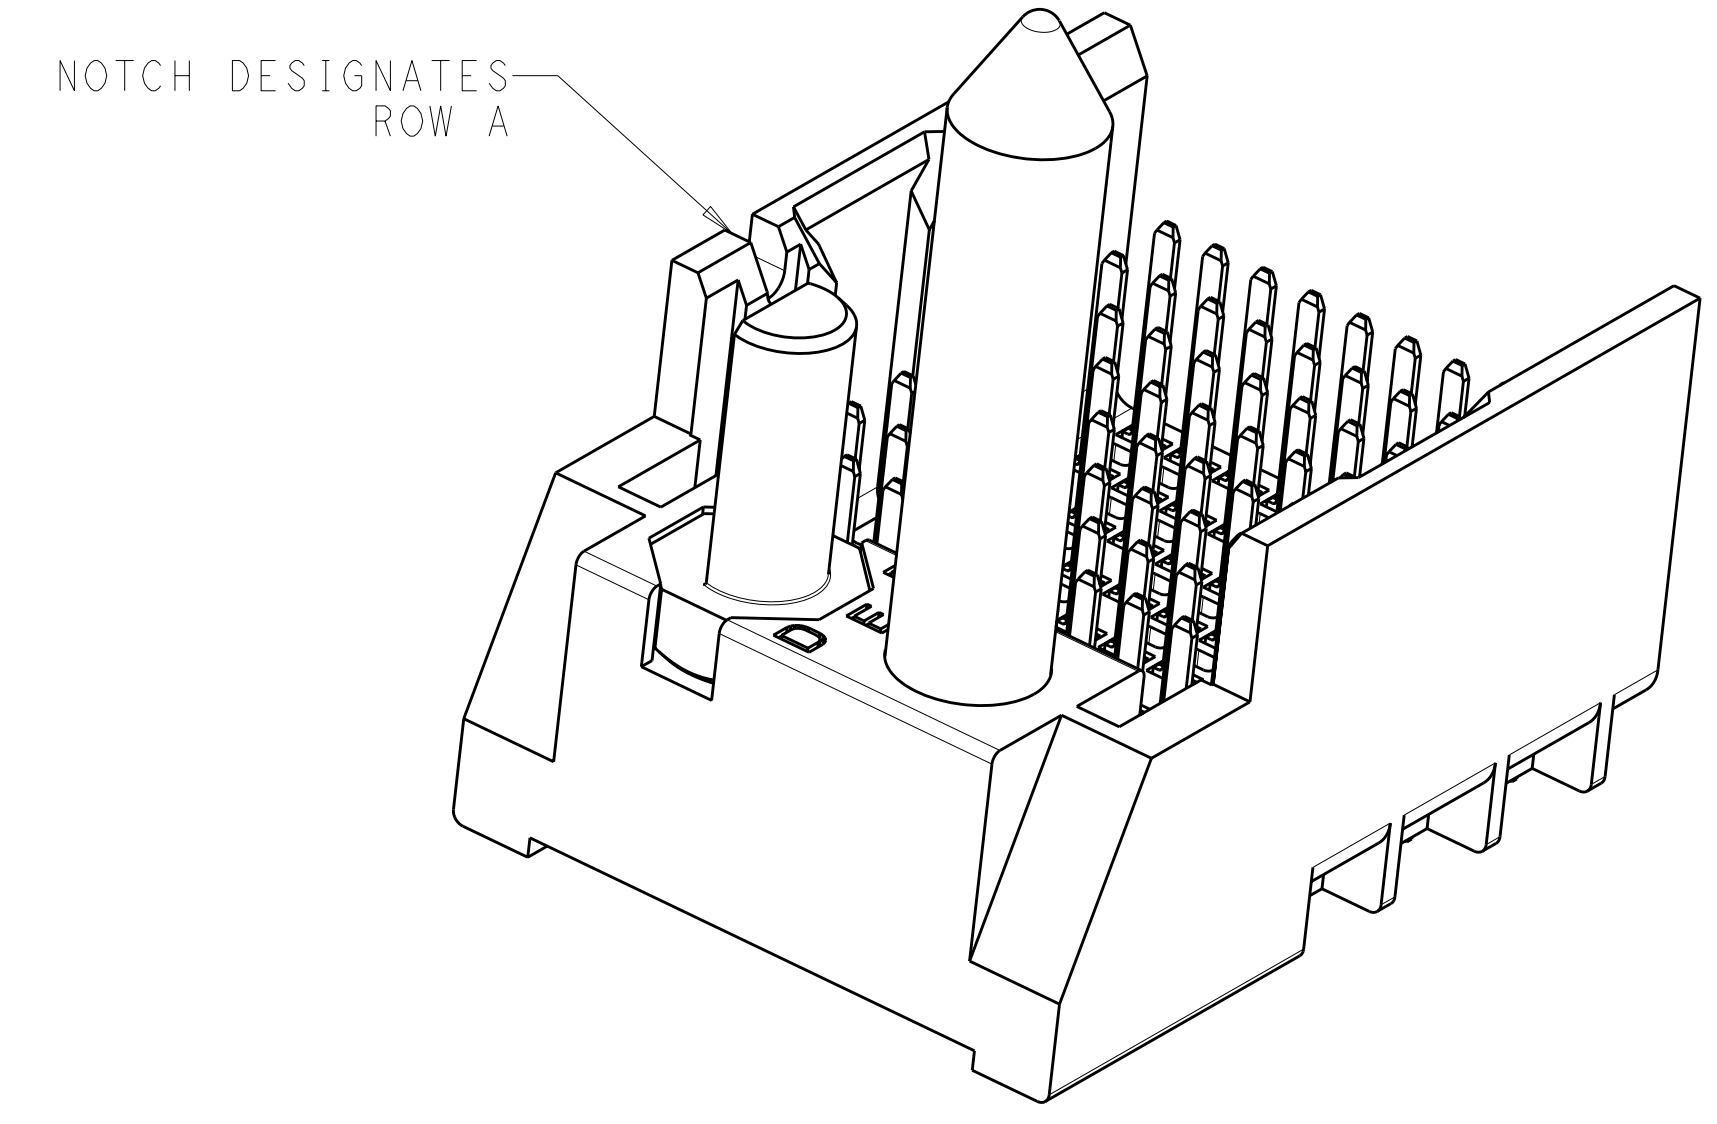
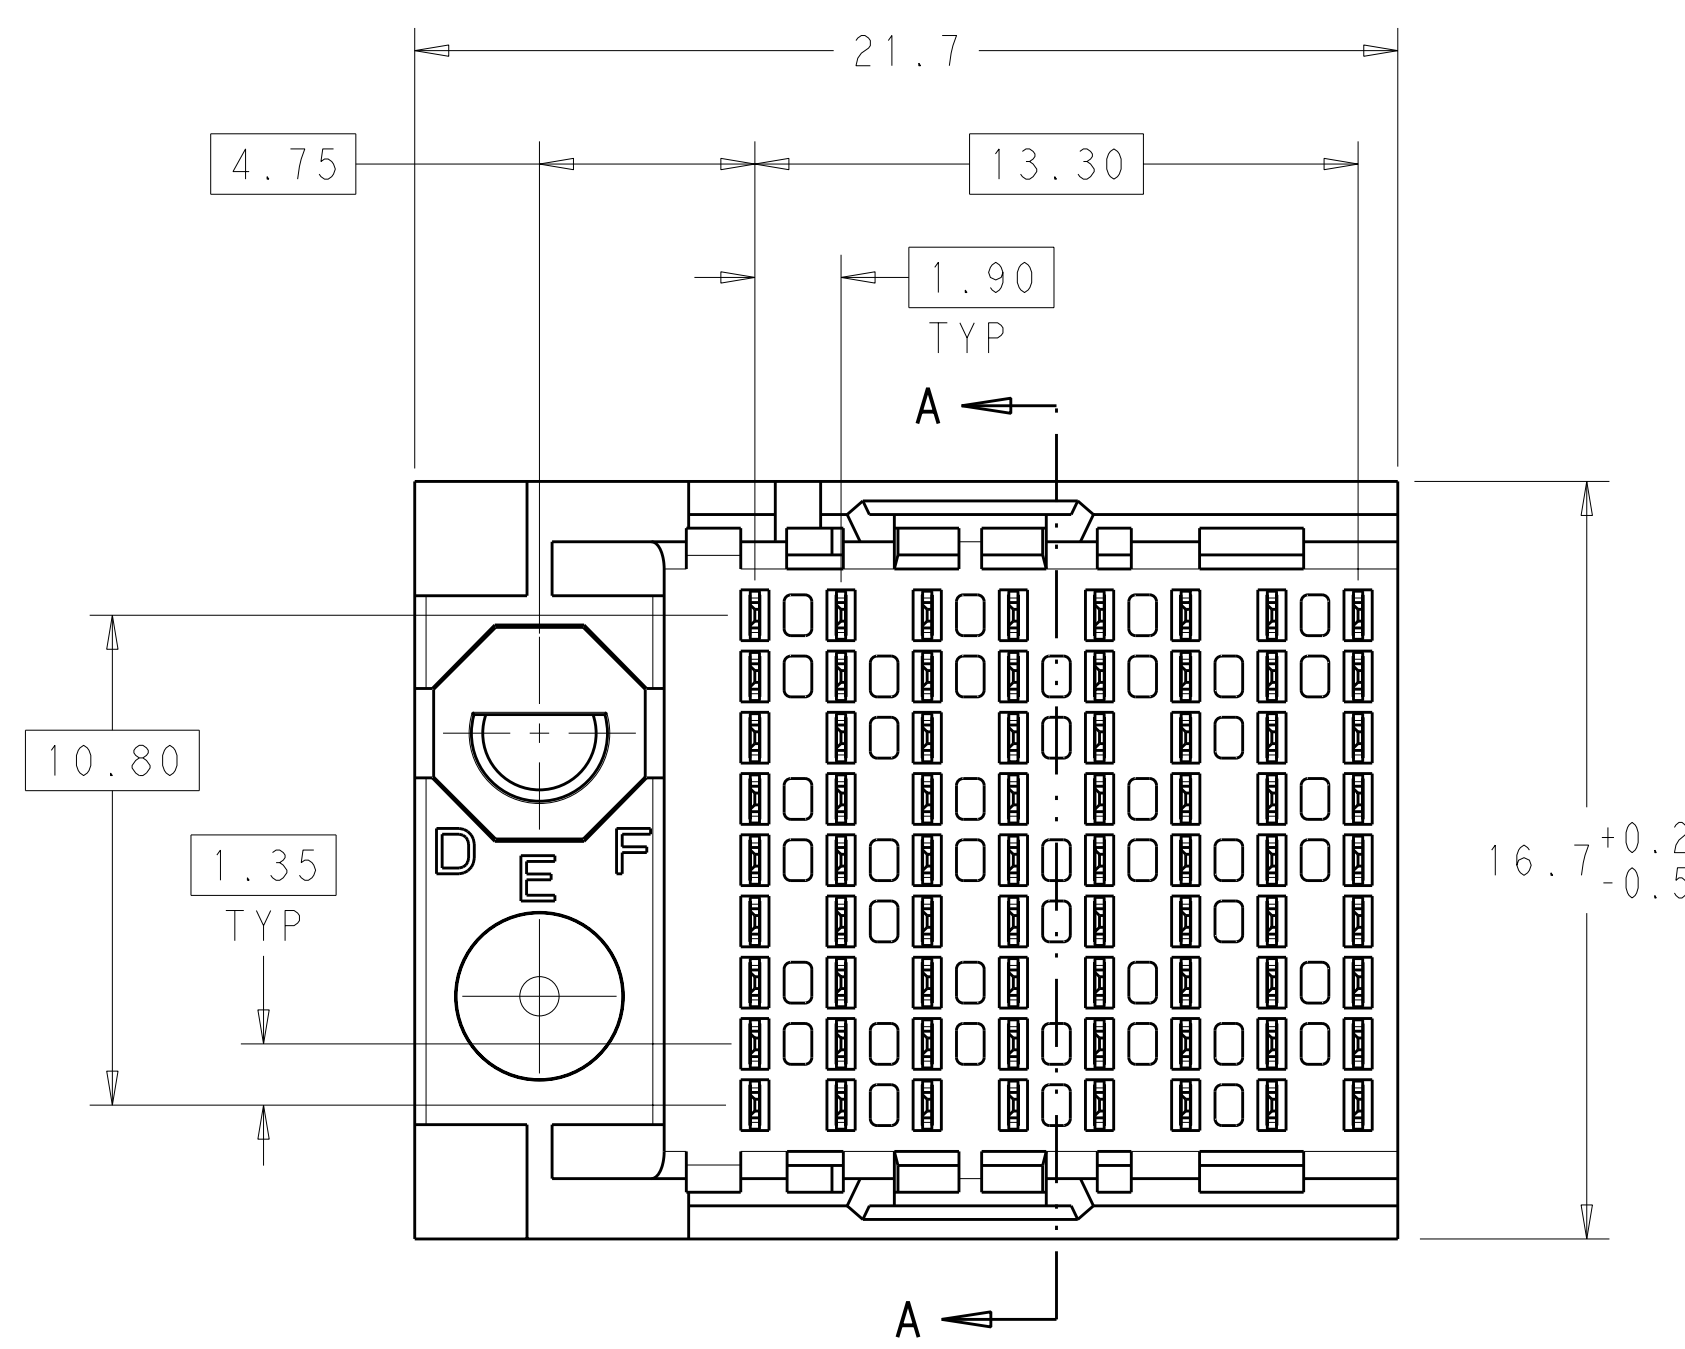
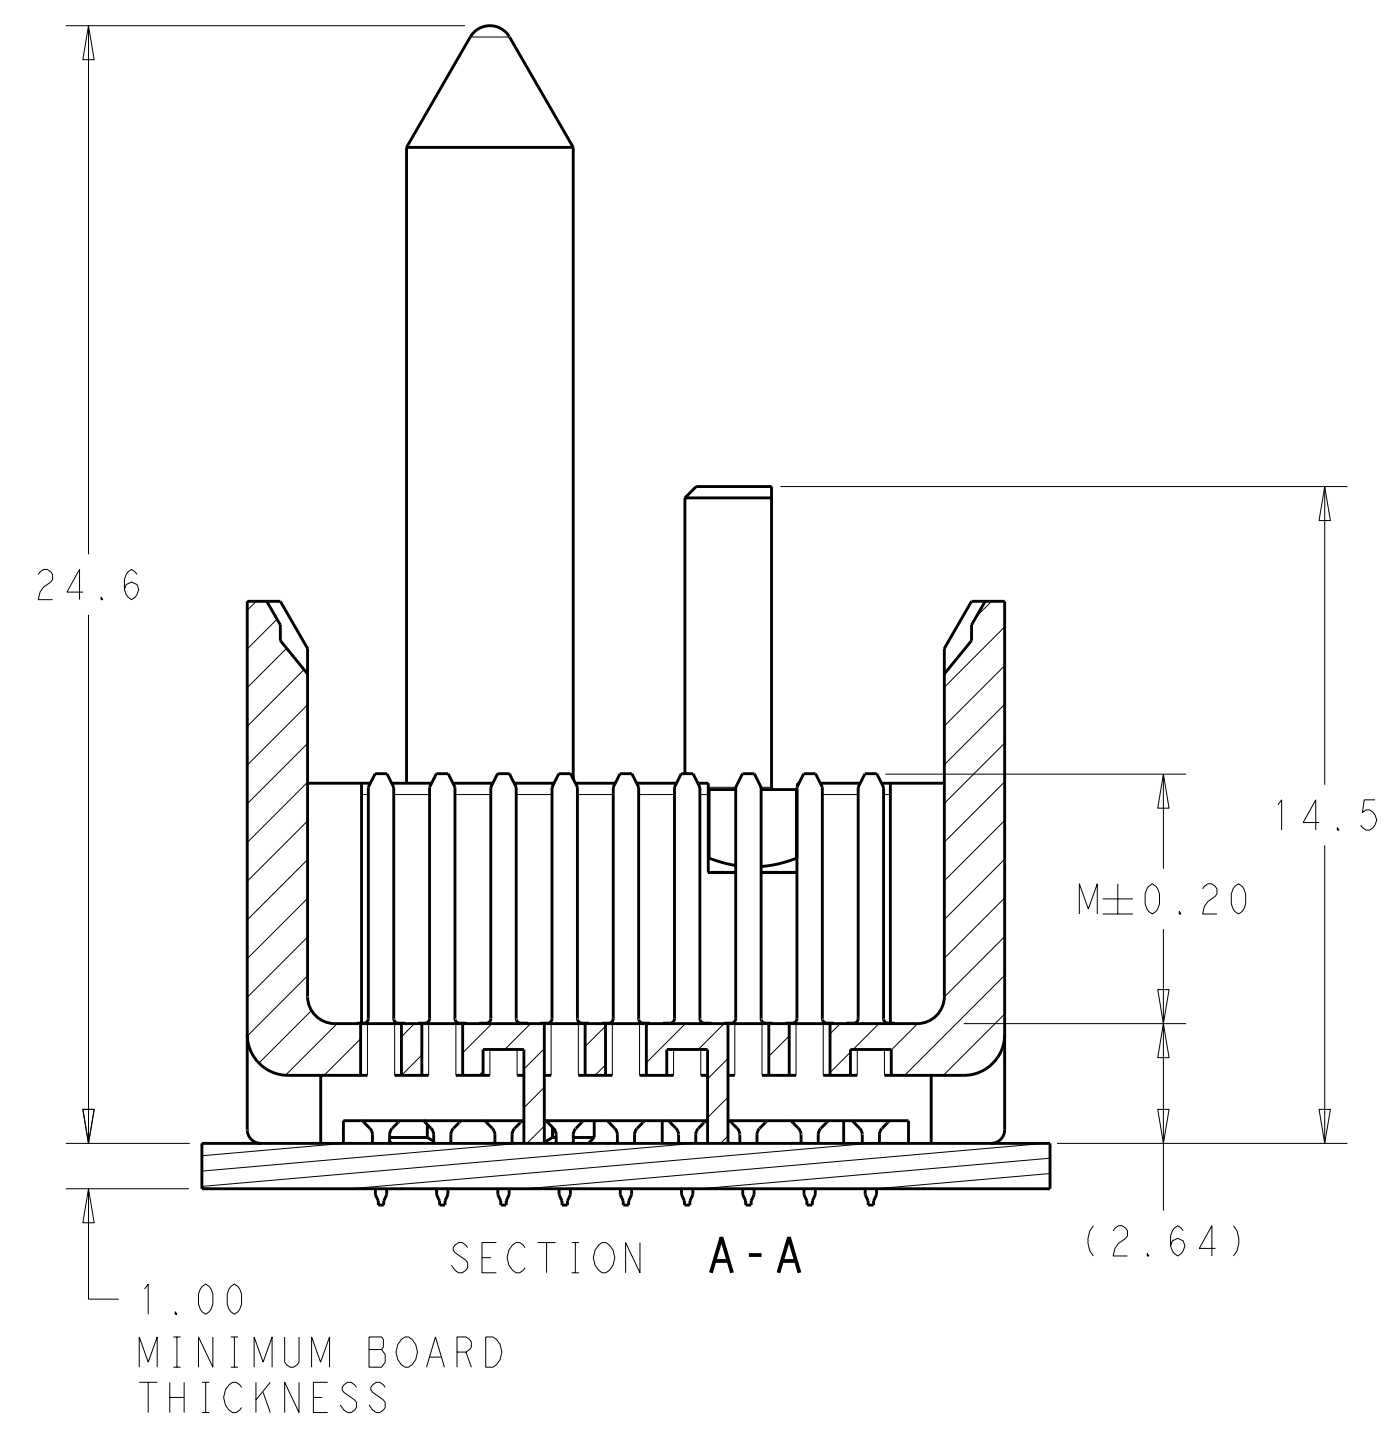


LOC	DIST	REV	DATE	BY	APPD
AD	00	C	05JAN2012	KH	DY

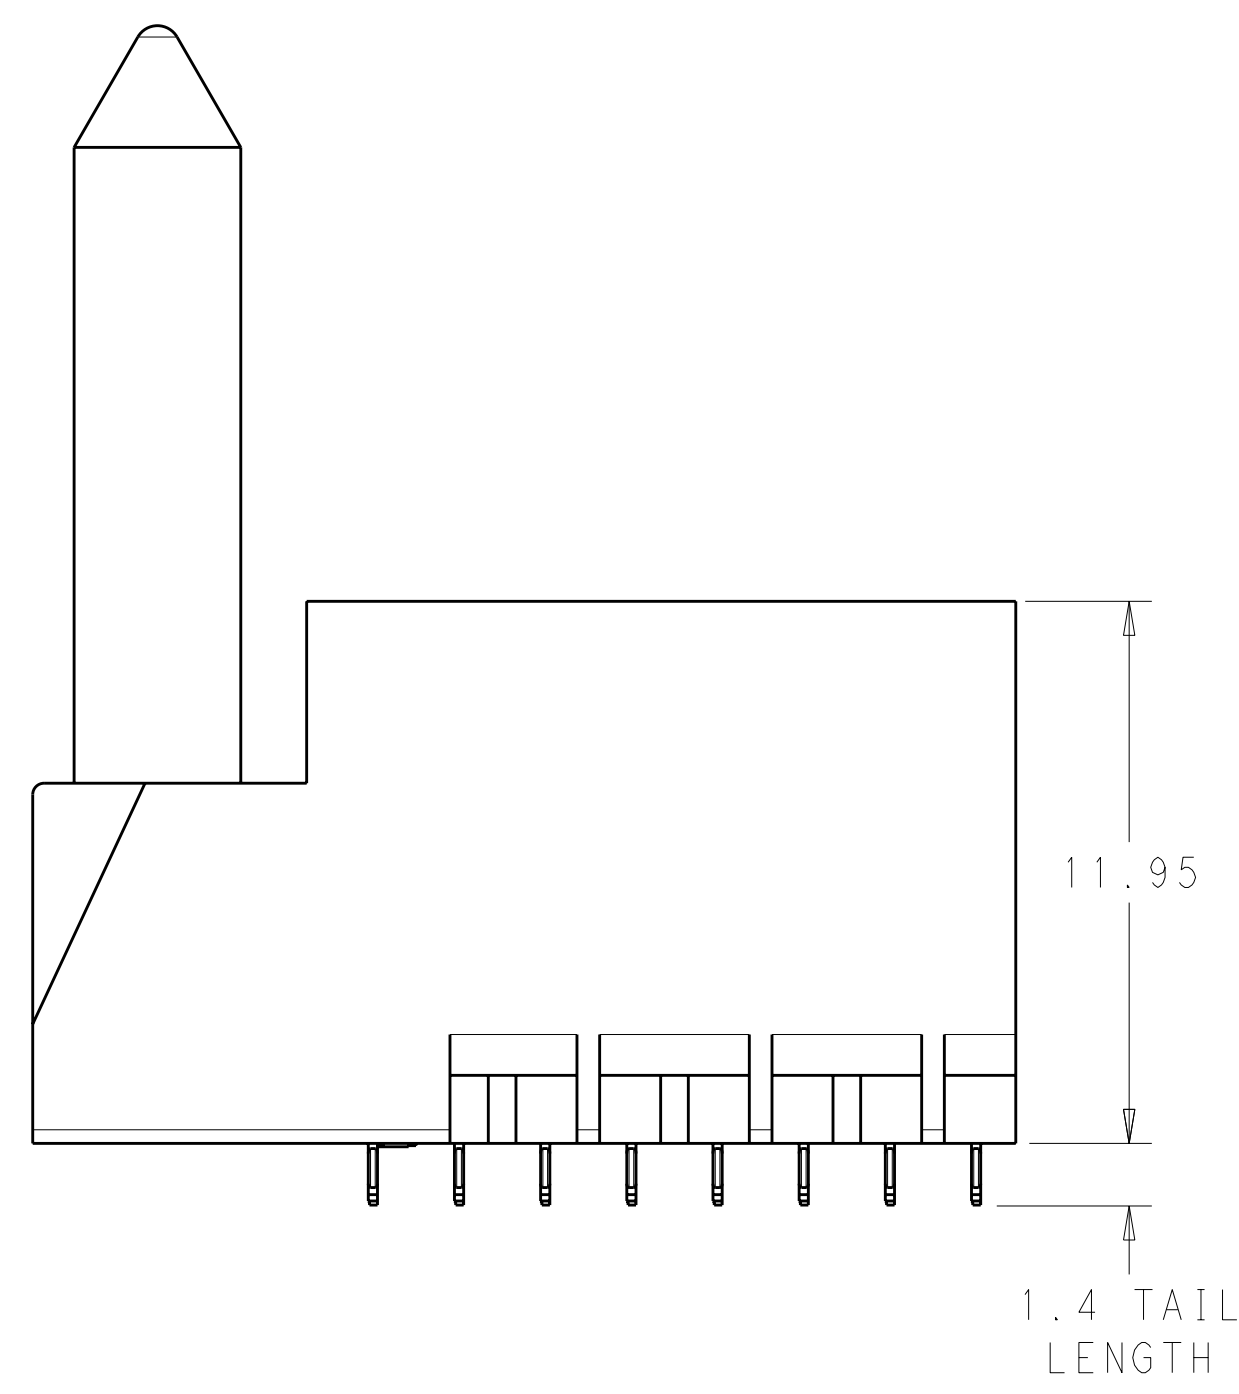

- 1 MATERIAL:  
HOUSING: LCP, GLASS FILLED, UL94V-0.  
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.
- 2 FINISH:  
30μ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN ON PCB TAILS, NICKEL OVERALL.
- 3 FINISH:  
30μ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN-LEAD ON PCB TAILS, NICKEL OVERALL.
- 4. SCREWS PACKAGED IN END OF PACKAGING TUBE.
- 5 FOR GROUNDED GUIDE PIN USE Ø3.56±0.08 PTH, Ø3.66 DRILL, AND Ø6.5 PAD.
- 6. KEYING PIN SHOWN IN POSITION A. SEE KEYING CHART ON SHEET 2 FOR OTHER POSITIONS.

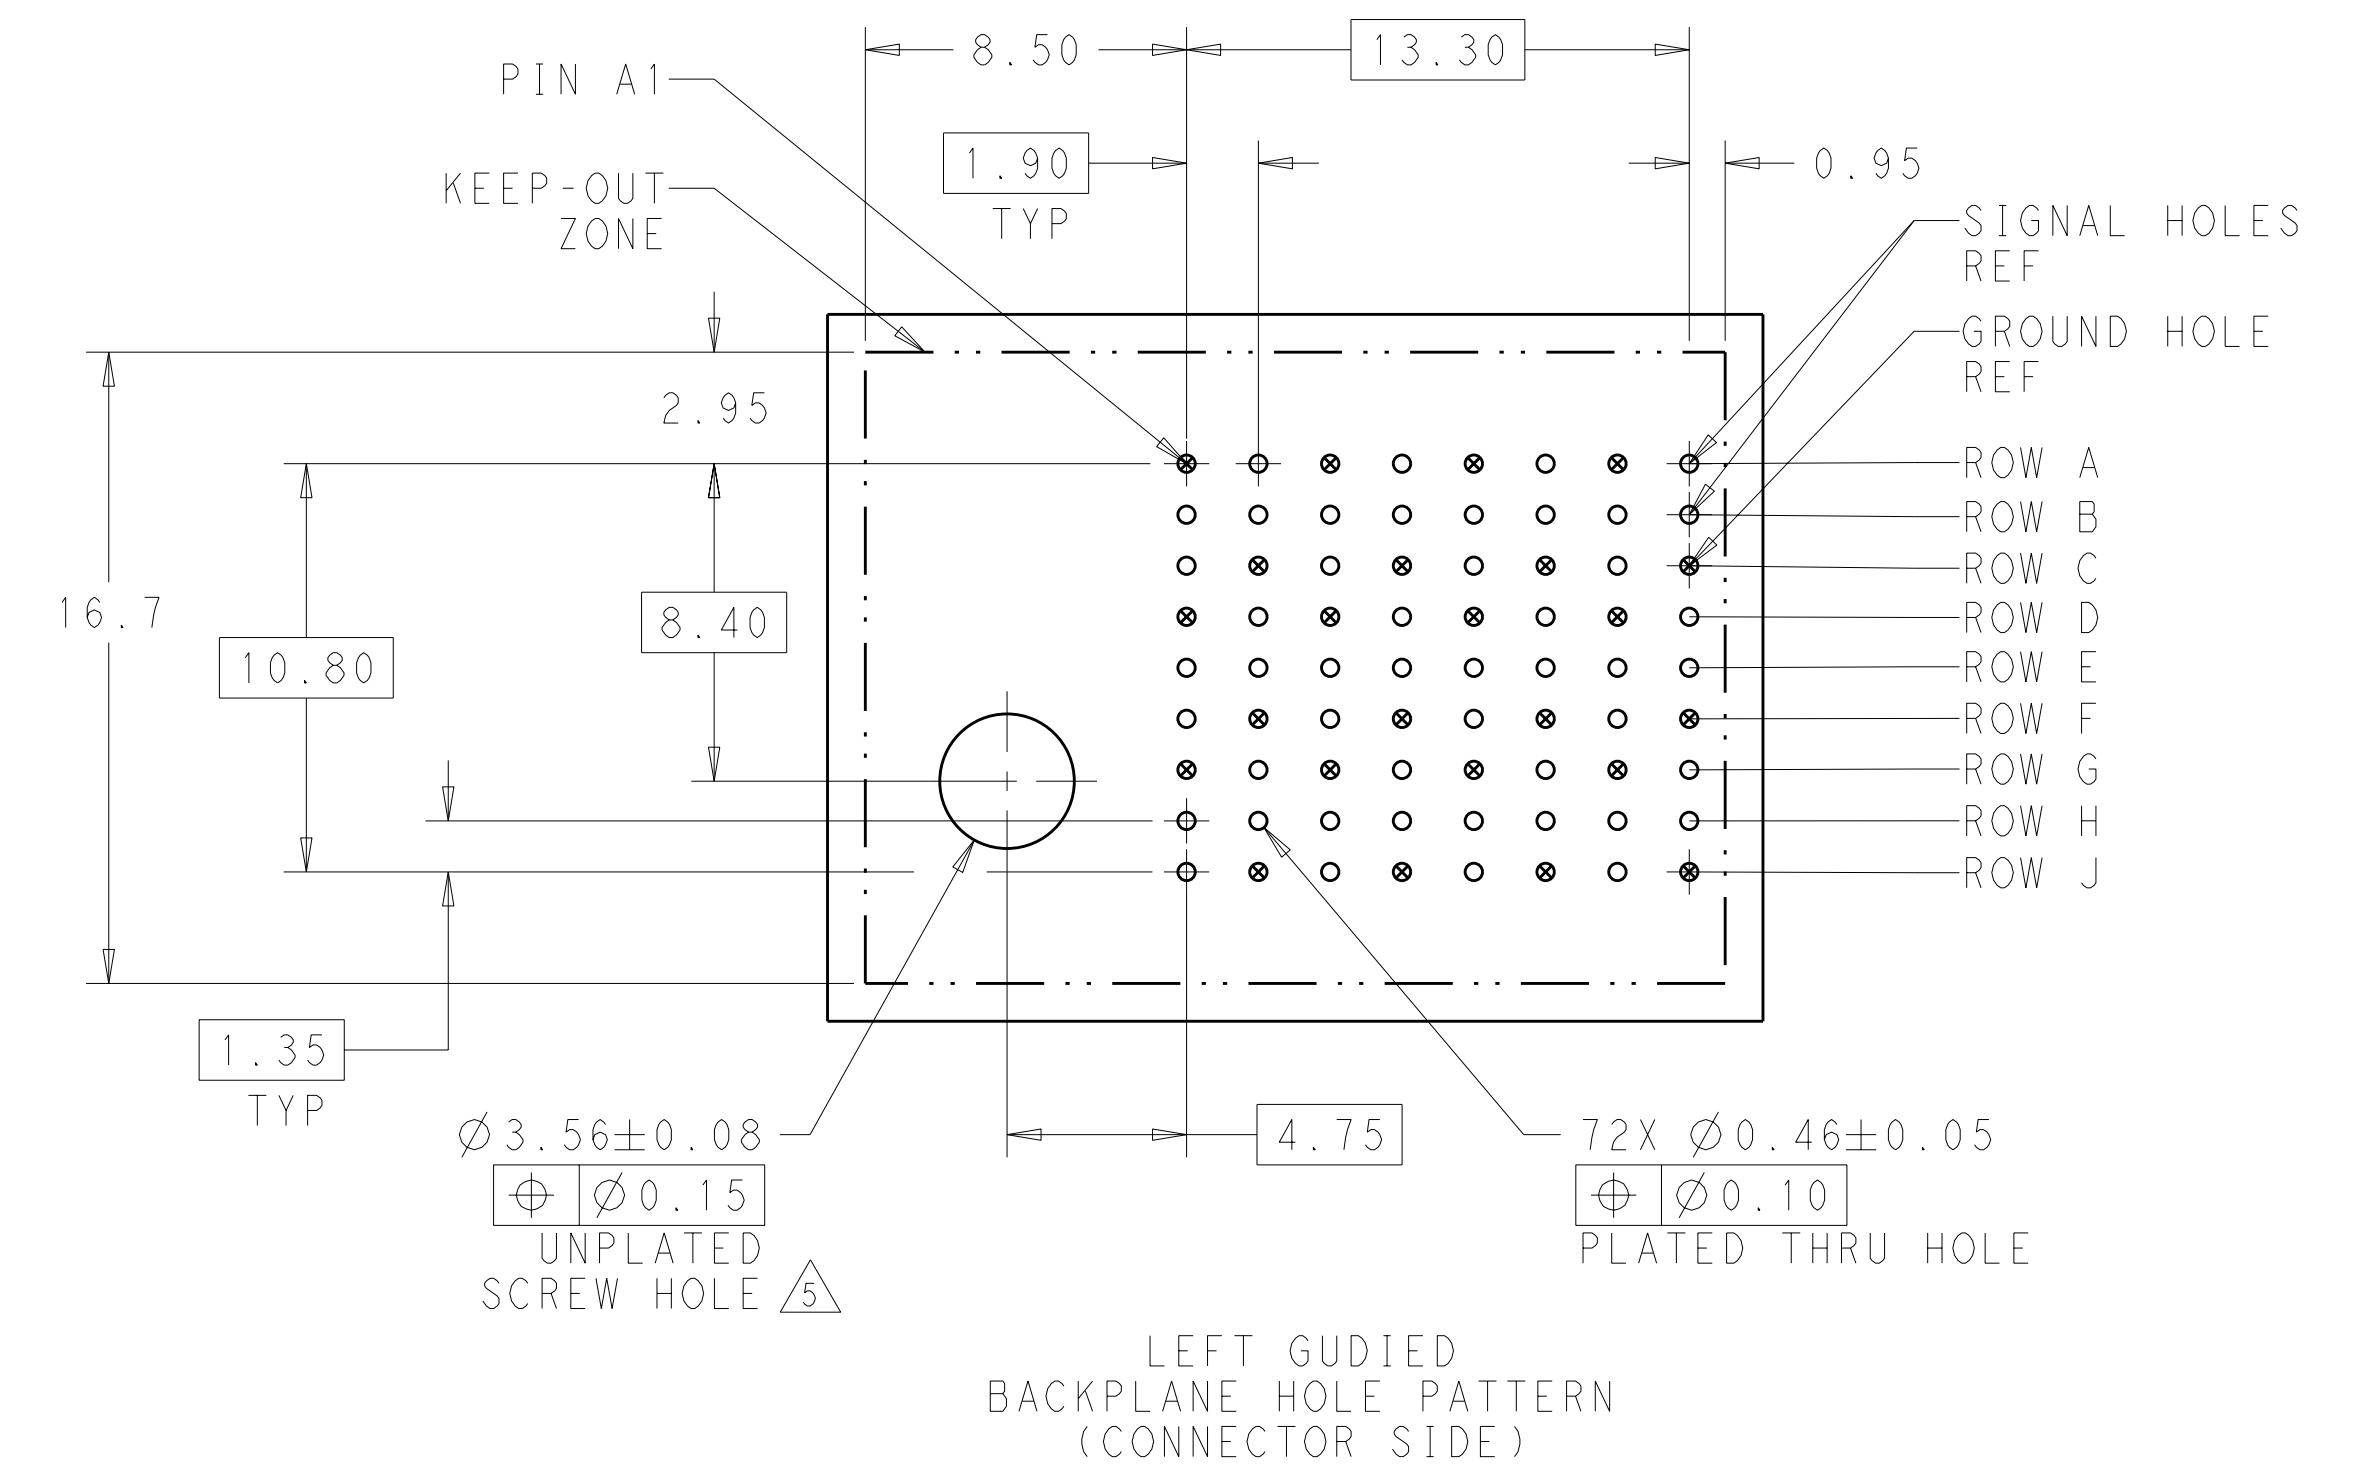


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. K. SHOBER 11JAN2011 CHK J. EARY 11JAN2011 APVD J. EARY 11JAN2011	<b>STE</b> TE Connectivity NAME: IMPACT, 3 PAIR, 8 COLUMN, HEADER LEFT GUIDED, OPEN END WALL SIGNAL MODULE, 0.46 PTH
DIMENSIONS: mm 	TOLERANCES UNLESS OTHERWISE SPECIFIED: 9 PLC ± 1 PLC ±0.25 3 PLC ±0.13 5 PLC ± 4 PLC ± ANGLES ± FINISH SEE TABLE	PRODUCT SPEC APPLICATION SPEC WEIGHT CUSTOMER DRAWING	

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20  
 © COPYRIGHT 20 ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
AD	00	P	LTG	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

3	H	5.5	8-2057752-6
3	H	4.9	8-2057752-5
3	H	4.5	8-2057752-4
2	H	5.5	8-2057752-3
2	H	4.9	8-2057752-2
2	H	4.5	8-2057752-1
3	G	5.5	7-2057752-6
3	G	4.9	7-2057752-5
3	G	4.5	7-2057752-4
2	G	5.5	7-2057752-3
2	G	4.9	7-2057752-2
2	G	4.5	7-2057752-1
3	F	5.5	6-2057752-6
3	F	4.9	6-2057752-5
3	F	4.5	6-2057752-4
2	F	5.5	6-2057752-3
2	F	4.9	6-2057752-2
2	F	4.5	6-2057752-1
3	E	5.5	5-2057752-6
3	E	4.9	5-2057752-5
3	E	4.5	5-2057752-4
2	E	5.5	5-2057752-3
2	E	4.9	5-2057752-2
2	E	4.5	5-2057752-1
3	D	5.5	4-2057752-6
3	D	4.9	4-2057752-5
3	D	4.5	4-2057752-4
2	D	5.5	4-2057752-3
2	D	4.9	4-2057752-2
2	D	4.5	4-2057752-1
3	C	5.5	3-2057752-6
3	C	4.9	3-2057752-5
3	C	4.5	3-2057752-4
2	C	5.5	3-2057752-3
2	C	4.9	3-2057752-2
2	C	4.5	3-2057752-1
3	B	5.5	2-2057752-6
3	B	4.9	2-2057752-5
3	B	4.5	2-2057752-4
2	B	5.5	2-2057752-3
2	B	4.9	2-2057752-2
2	B	4.5	2-2057752-1
3	A	5.5	1-2057752-6
3	A	4.9	1-2057752-5
3	A	4.5	1-2057752-4
2	A	5.5	1-2057752-3
2	A	4.9	1-2057752-2
2	A	4.5	1-2057752-1
3	-	5.5	2057752-6
3	-	4.9	2057752-5
3	-	4.5	2057752-4
2	-	5.5	2057752-3
2	-	4.9	2057752-2
2	-	4.5	2057752-1
FINISH	KEY POSITION	DIM M	PART NUMBER

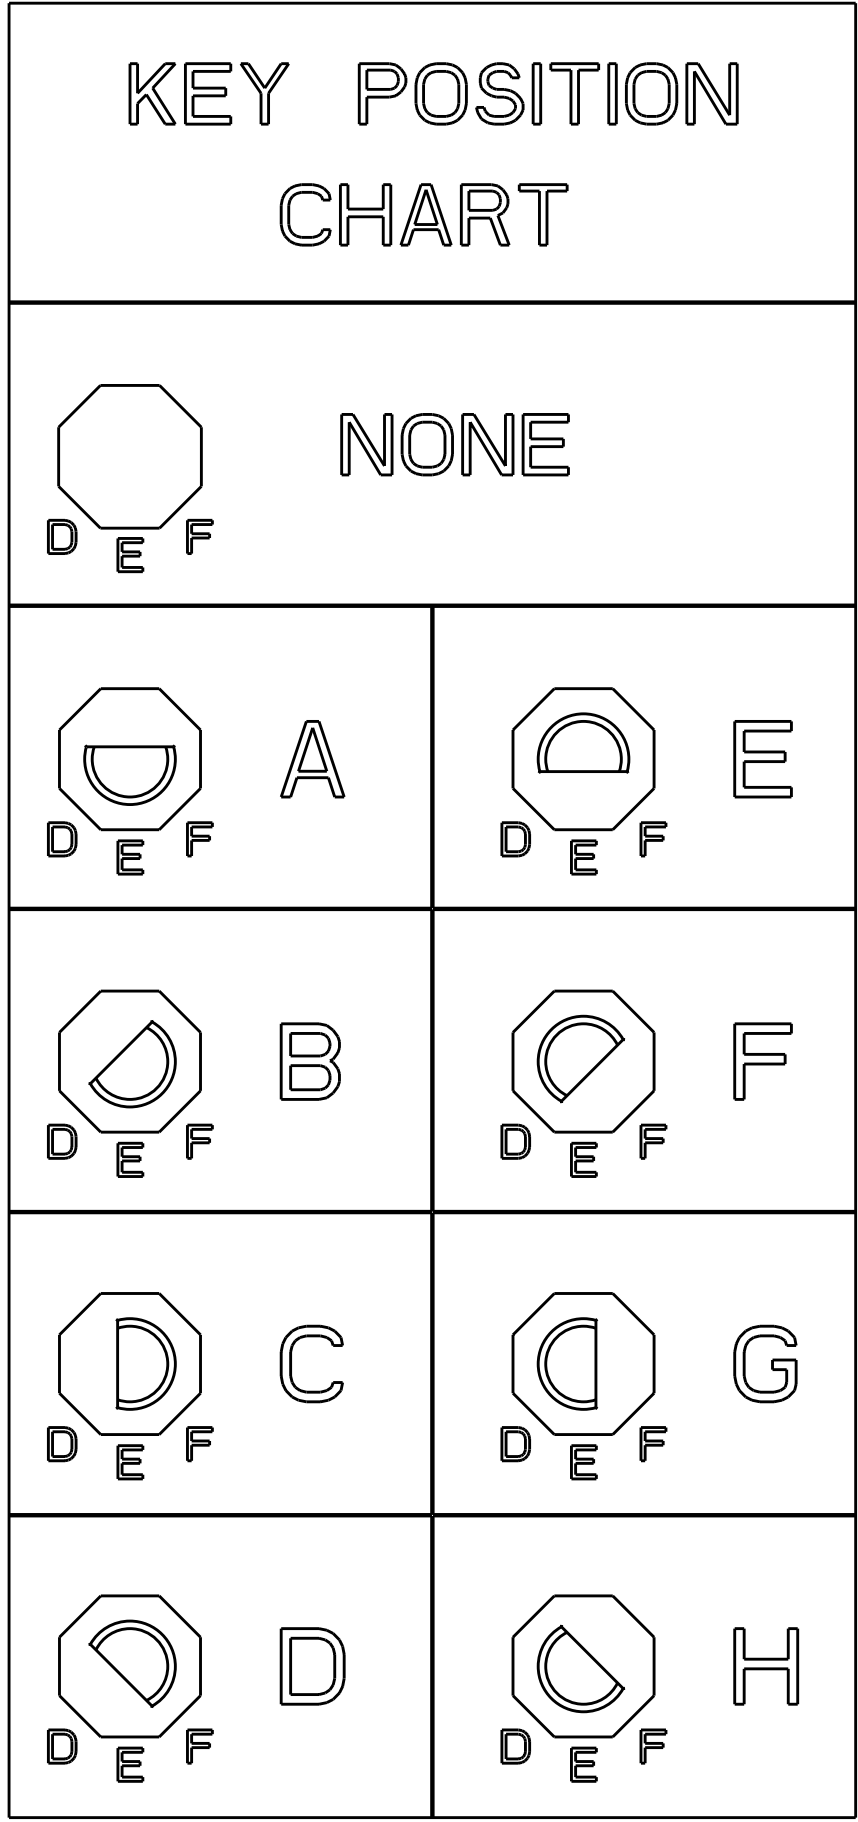

REFER TO WWW.TE.COM  
FOR PRODUCT AVAILABILITY

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. K. SHOBER 11JAN2011	<b>TE</b> TE Connectivity
DIMENSIONS: mm		CHK J. EARY 11JAN2011	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. EARY 11JAN2011	NAME IMPACT, 3 PAIR, 8 COLUMN, HEADER LEFT GUIDED, OPEN END WALL SIGNAL MODULE, 0.46 PTH
9 PLC ±0.25		PRODUCT SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO
3 PLC ±0.13		APPLICATION SPEC	A100779C=2057752
5 PLC ±		WEIGHT	SCALE 5:1 SHEET 2 OF 2 REV C
4 PLC ±		CUSTOMER DRAWING	
ANGLES ±			
FINISH SEE TABLE			