

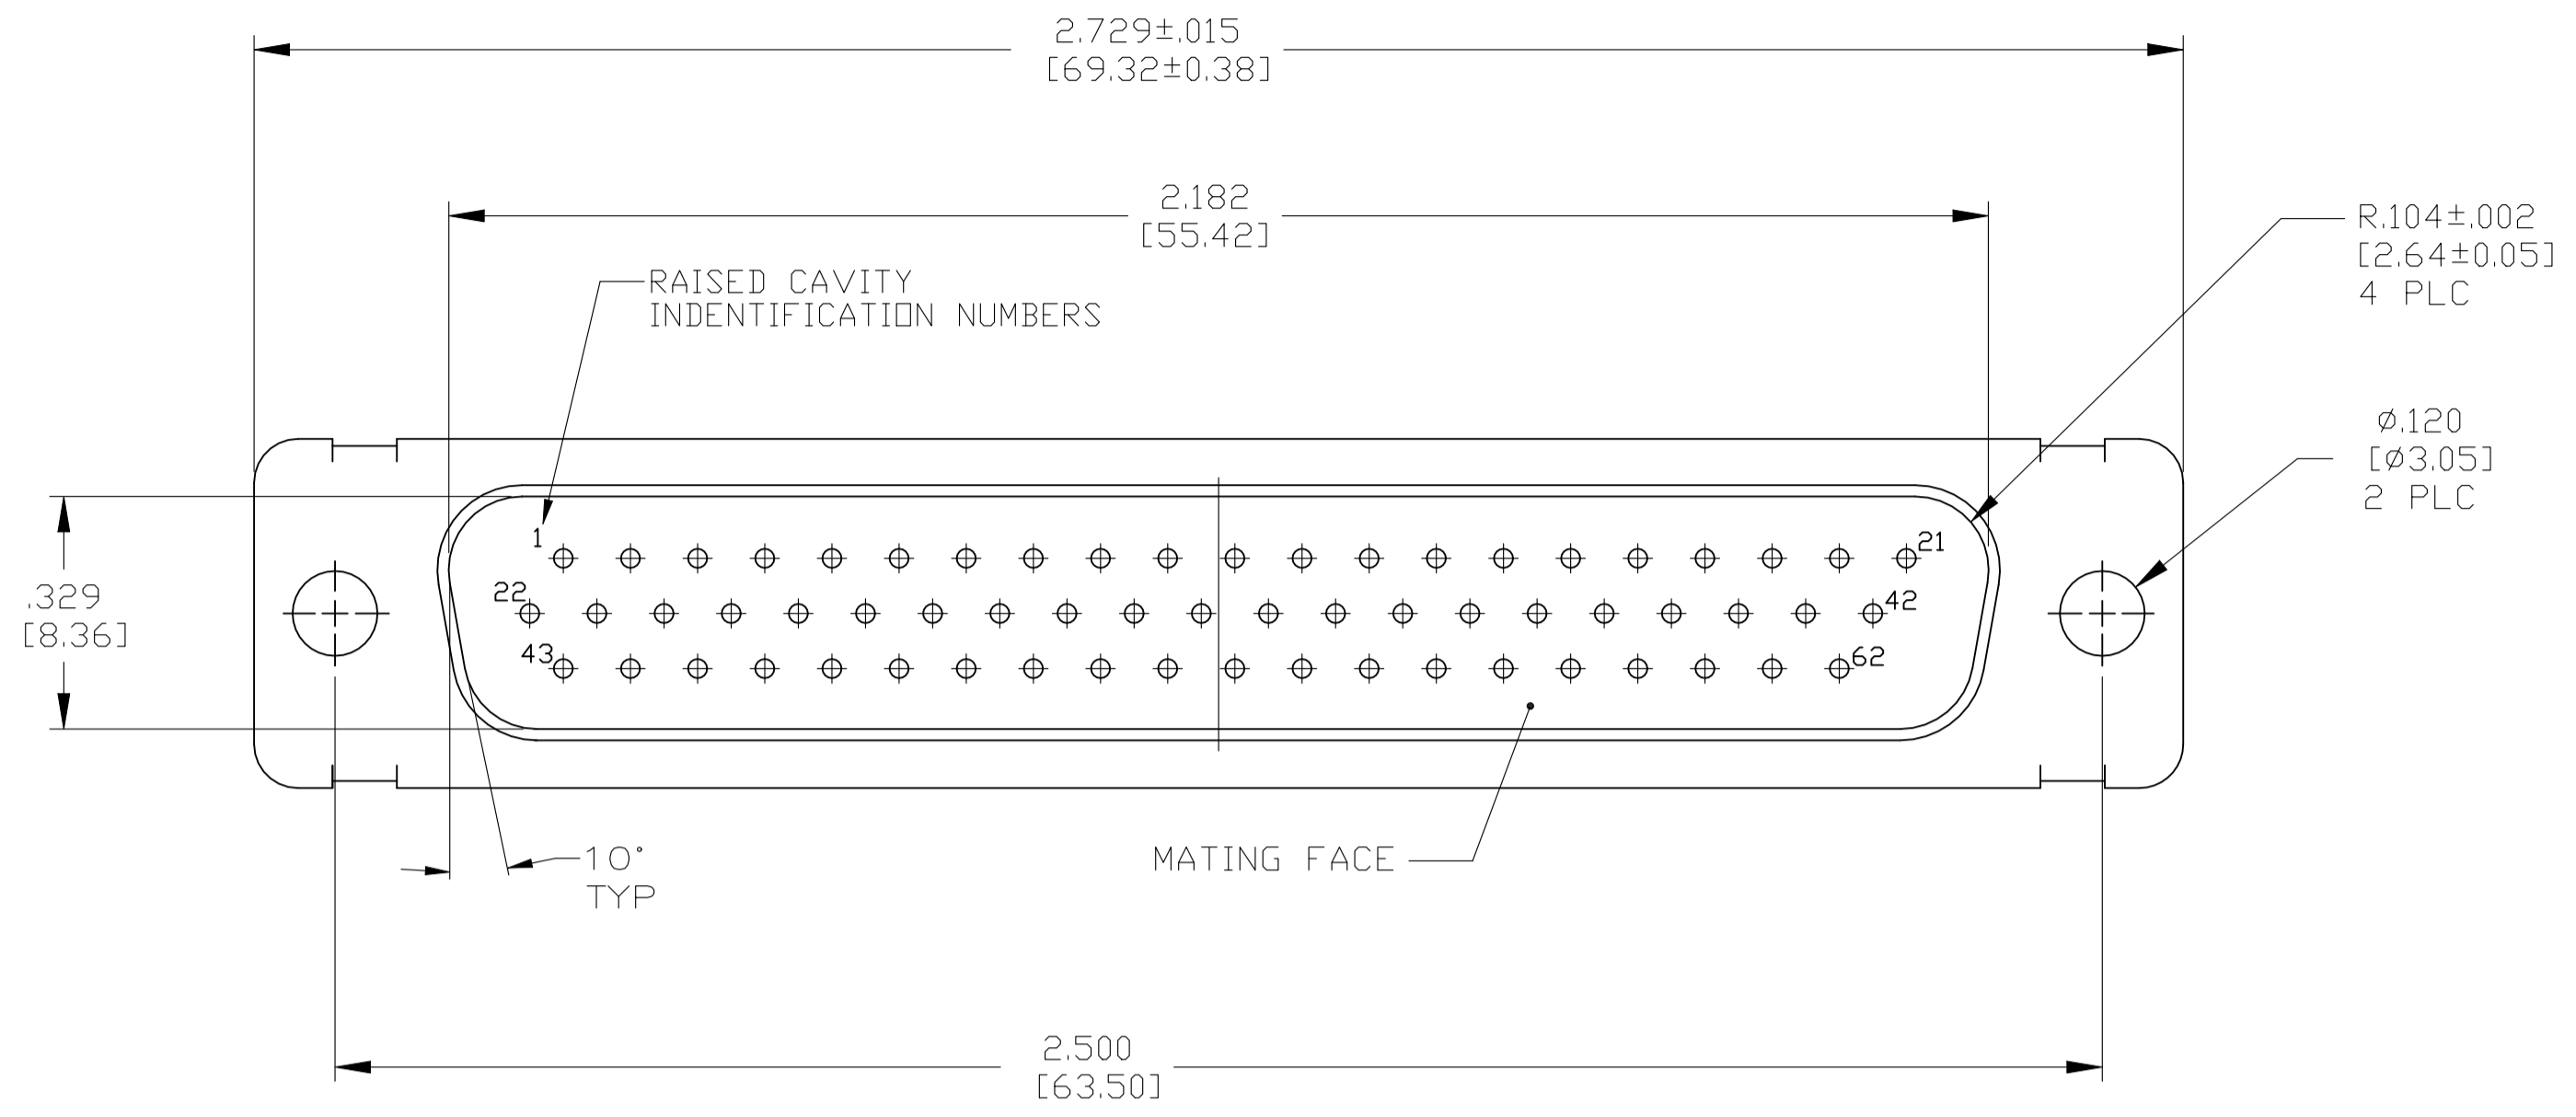
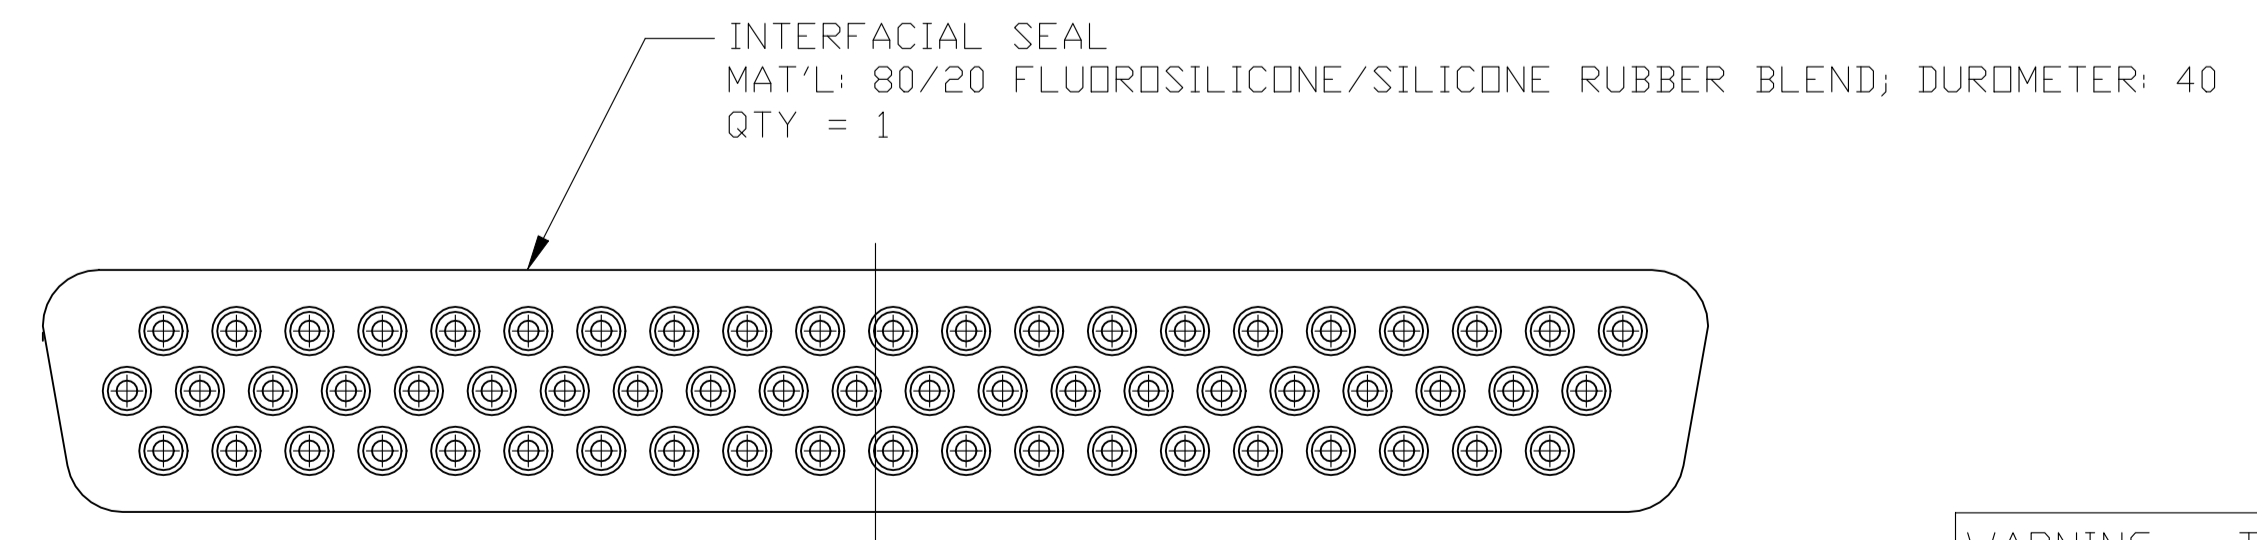


REVISIONS				
P	LTR	DESCRIPTION	DATE	APP'D
D		REVISED PER ECN-24-266258	15MAY2024	PP DS

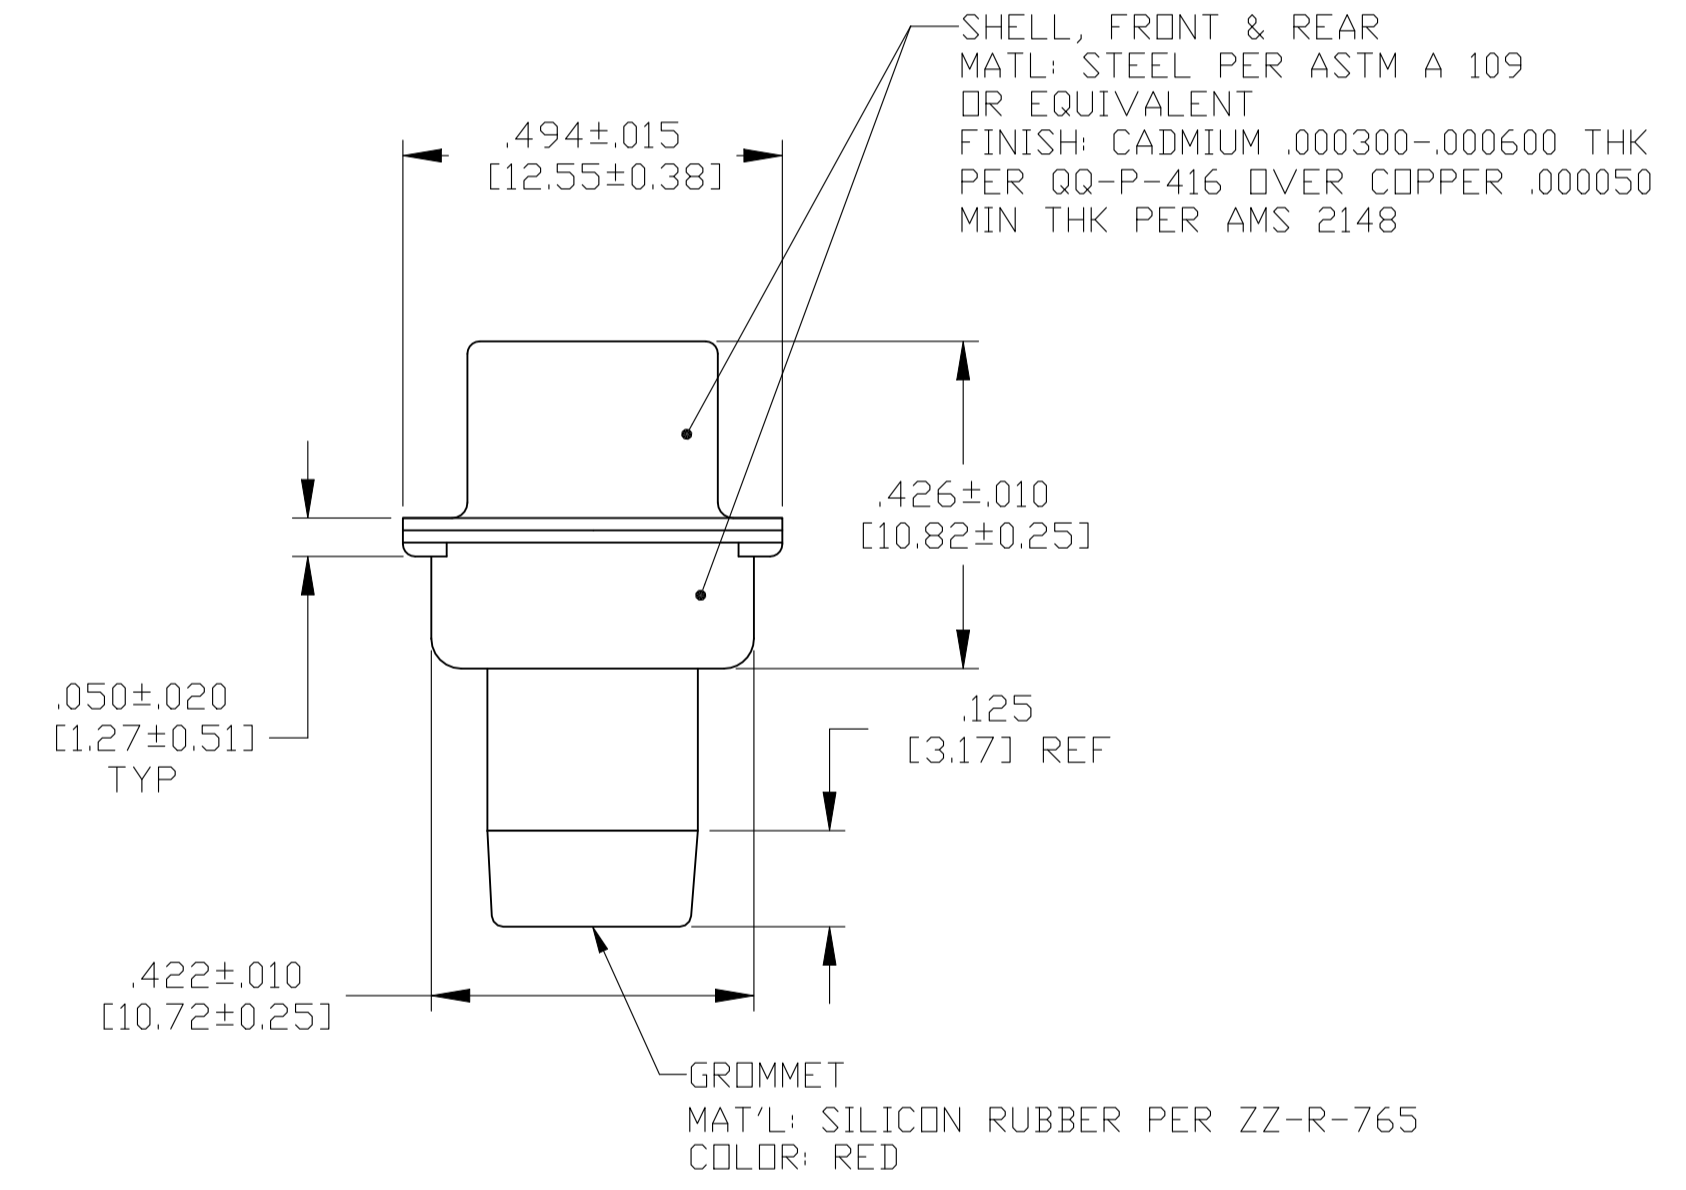

1. MARKED WITH .047 [1.19] HIGH CHARACTERS. FAR SIDE REFERS TO WIDE SIDE OF KEYSTONE, NEAR SIDE REFERS TO NARROW SIDE OF KEYSTONE.
2. THIS ASSEMBLY IS DESIGNED TO CONFORM TO THE LATEST ISSUE OF MIL-C-24308.
3. MAXIMUM WIRE INSULATION USED WITH THIS CONNECTOR IS .054 [1.37] DIAMETER WITH GROMMET.
4. METAL RETENTION CLIPS ARE INCLUDED IN INSERTS.
5. THIS PLUG WILL MATE WITH ANY RECEPTACLE CONNECTOR WITH THE SAME INSERT ARRANGEMENT.
6. EPOXY IS APPLIED BETWEEN FRONT & REAR SHELLS AND INSERT.
7. FOR CONNECTOR ASSEMBLIES WITH OUT CONTACTS, TE PART NO. 204370-2, MUST BE ORDERED SEPARATELY.
8. FOR CONTACT CRIMPING AND CONTACT INSTALLATION AND REMOVAL REFER TO TE I.S. 408-7516.
9. GROUNDING INDENTS ON FRONT SHELL. (NOT SHOWN).

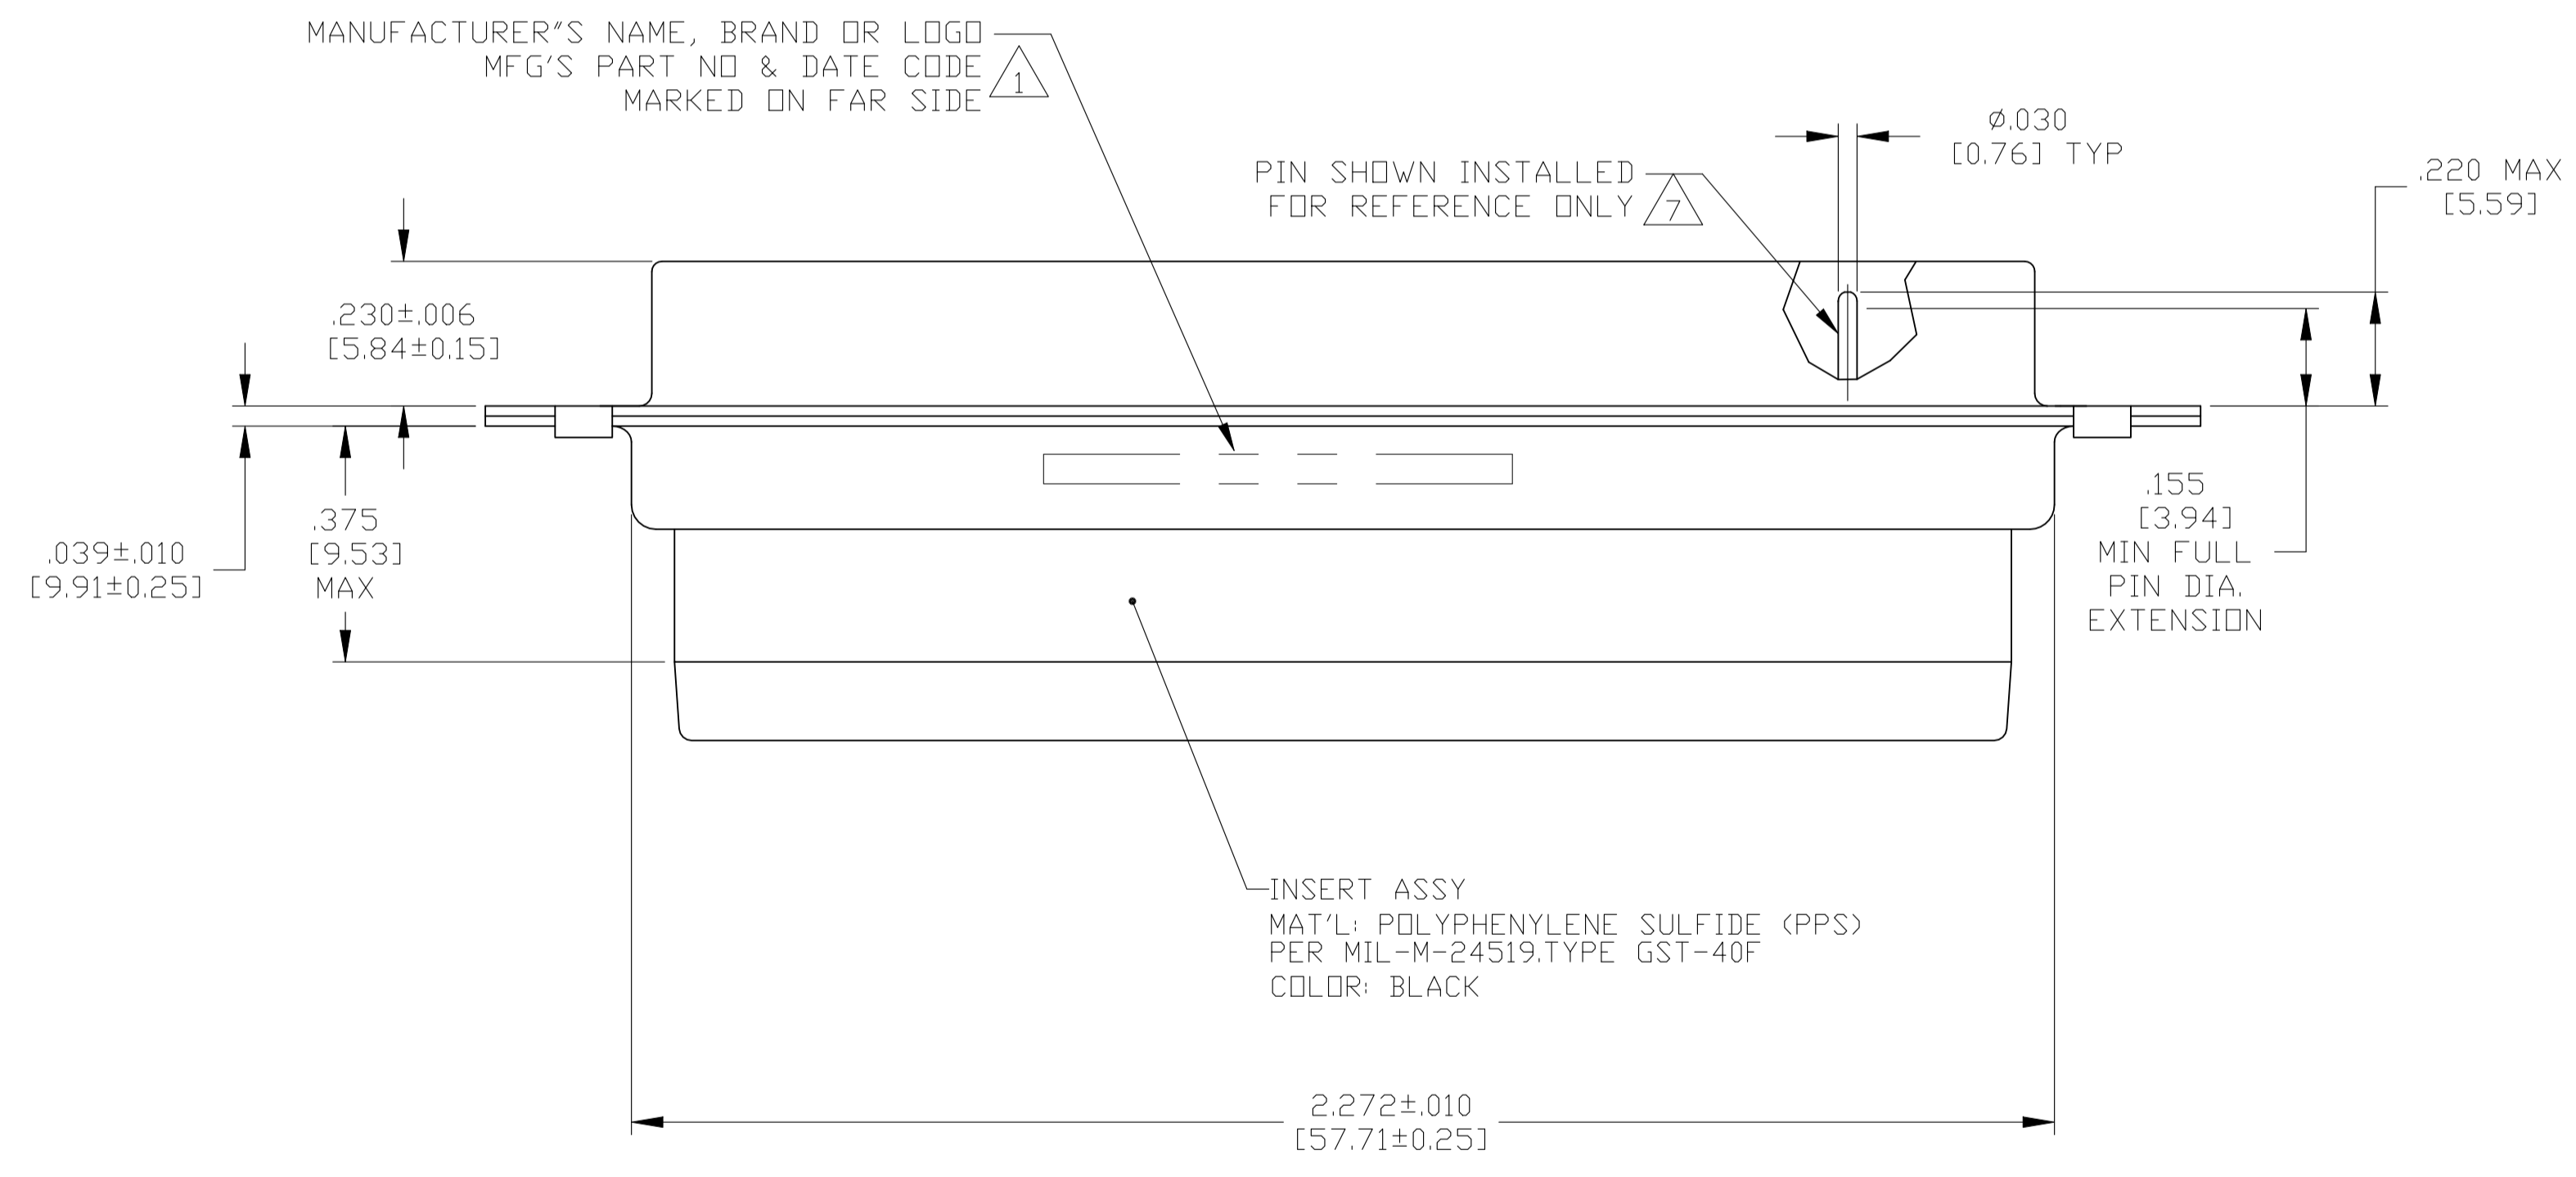

WARNING - THIS DOCUMENT CONTAINS TECHNOLOGY WHOSE EXPORT IS RESTRICTED BY THE EXPORT ADMINISTRATION REGULATIONS ("EAR") PURSUANT TO 15 C.F.R. PARTS 730-774. VIOLATIONS OF THE EAR ARE SUBJECT TO SEVERE CRIMINAL PENALTIES UNDER THE EXPORT CONTROL REFORM ACT, AS AMENDED (TITLE 50, U.S.C., SEC. 4801, ET SEQ.).

2101592-2
PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN C.C.THOMAS 3-6-10	TE Connectivity	
DIMENSIONS: INCHES		3-6-10	KIT, PLUG ASSY, SIZE 4, 62 POSN., SERIES 90, AMPLIMITE WITH IF SEAL AND GROMMET	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		3-6-10	RESTRICTED TO	
0. PLC	± .005	3-6-10	SCALE 4:1 SHEET 1 OF 1 REV D	
1. PLC	± .005			
2. PLC	± .005			
3. PLC	± .005			
4. PLC	± .005			
ANGLES	± .005			
MATERIAL SEE CALLOUTS		WEIGHT 0.000000	CUSTOMER DRAWING	
FINISH SEE CALLOUTS		A1 00779	2101592	