
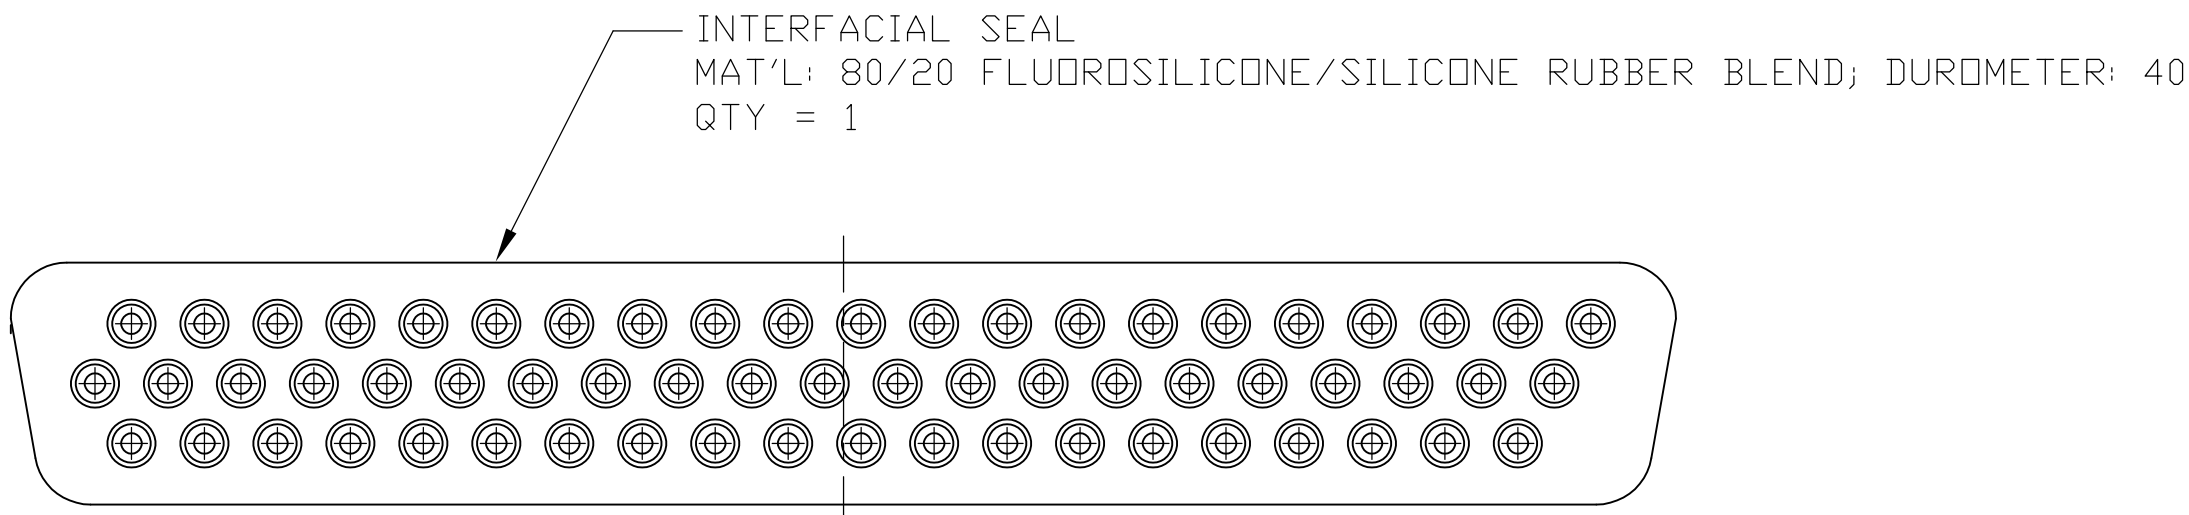
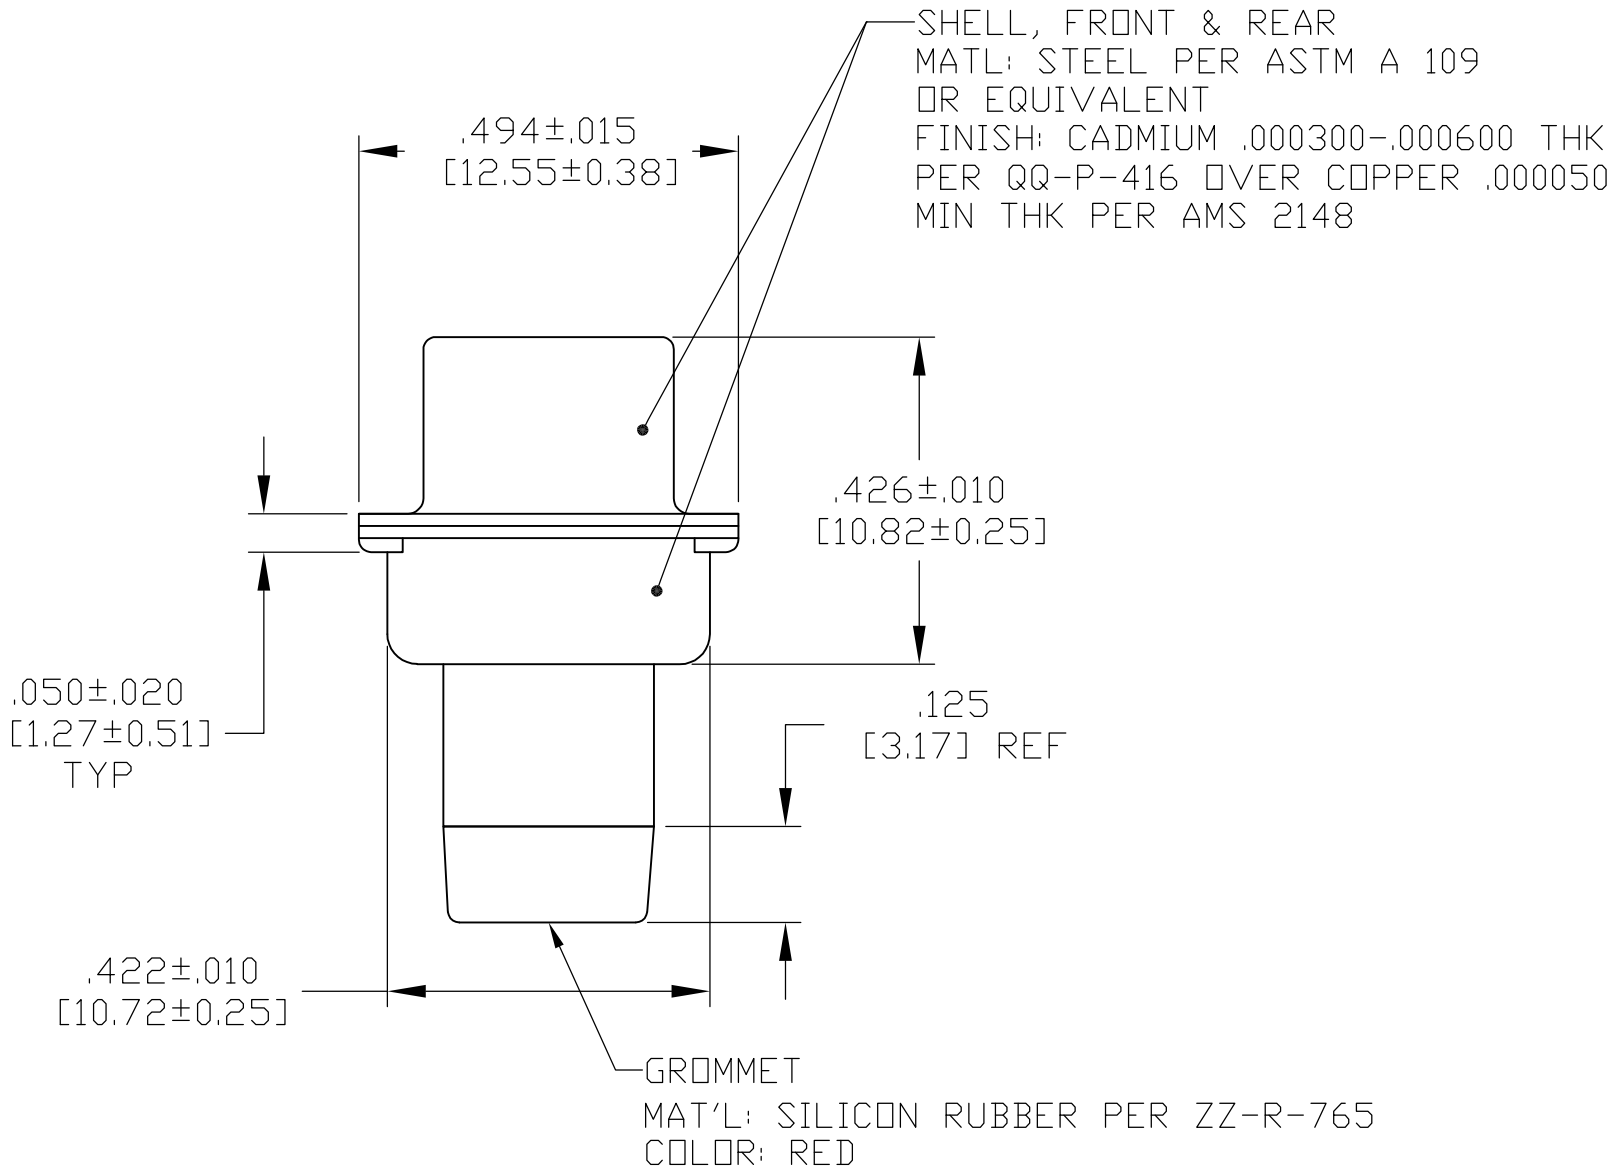
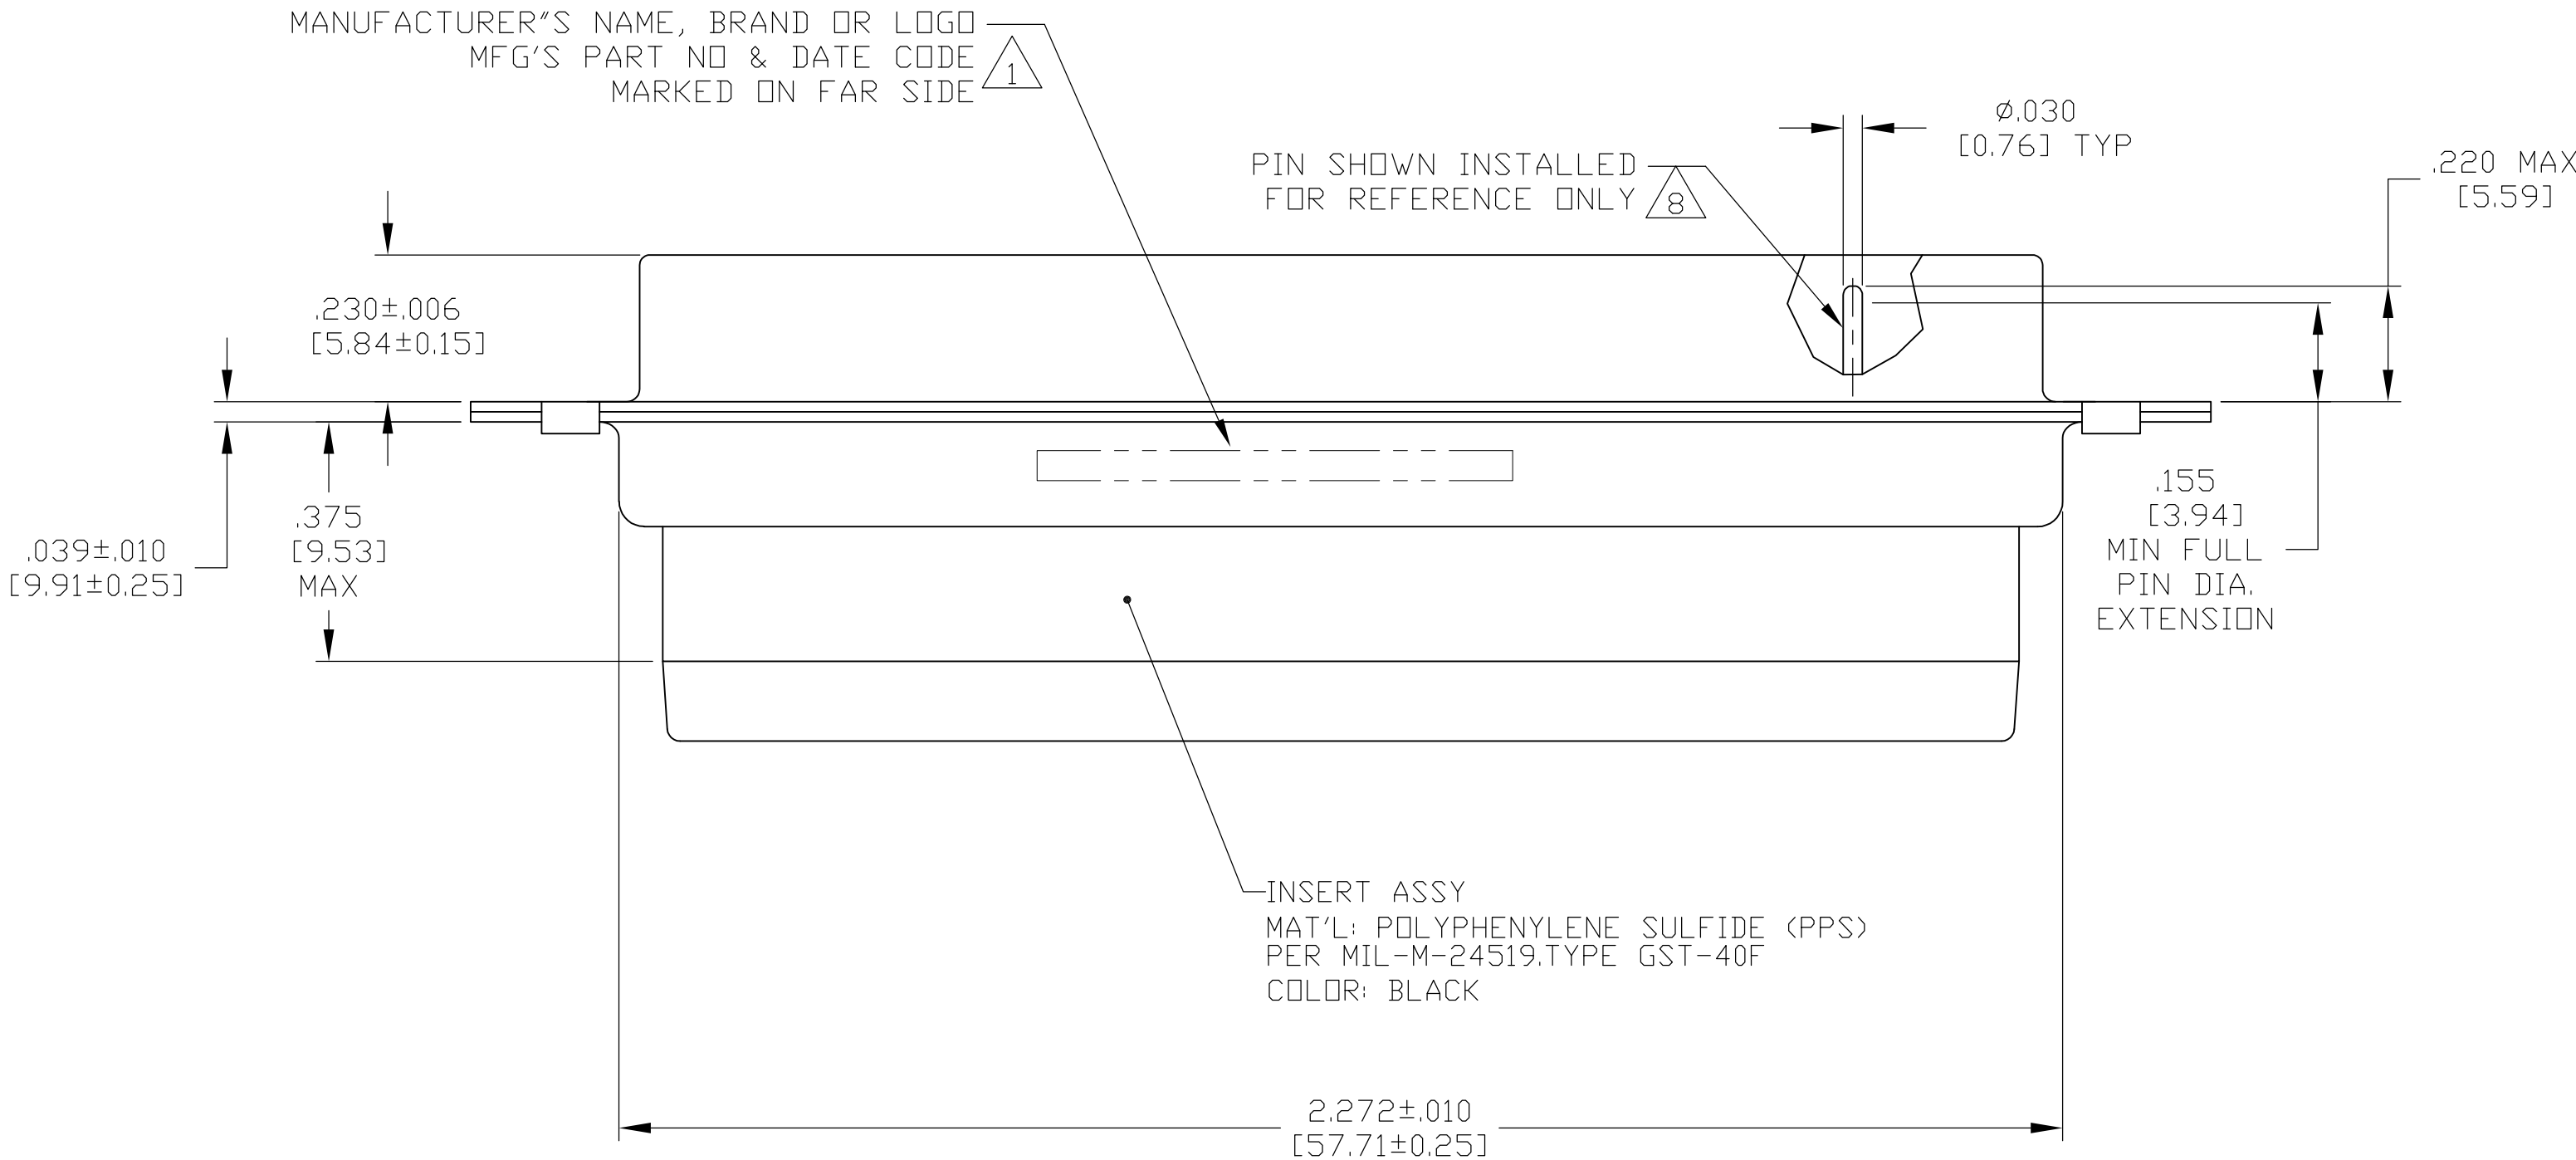


LOC		DIST		REVISIONS					
—		—		P	LTR	DESCRIPTION	DATE	DWN	APVD
					C	REV OER ECO-10-013916	06JUL10	PY	RL

- 1 MARKED WITH .047 [1.19] HIGH CHARACTERS. FAR SIDE REFERS TO WIDE SIDE OF KEYSTONE, NEAR SIDE REFERS TO NARROW SIDE OF KEYSTONE.
2. THIS ASSEMBLY IS DESIGNED TO CONFORM TO THE LATEST ISSUE OF MIL-C-24308.
3. MAXIMUM WIRE INSULATION USED WITH THIS CONNECTOR IS .054 [1.37] DIAMETER WITH GROMMET
4. METAL RETENTION CLIPS ARE INCLUDED IN INSERTS.
5. THIS PLUG WILL MATE WITH ANY RECEPTACLE CONNECTOR WITH THE SAME INSERT ARRANGEMENT.
6. EPOXY IS APPLIED BETWEEN FRONT & REAR SHELLS AND INSERT.
- 7 UL/CSA DESIGNATION STAMPED IN THIS AREA.
- 8 FOR CONNECTOR ASSEMBLIES WITH OUT CONTACTS, TE PART NO. 204370-2, MUST BE ORDERED SEPARATELY.
9. FOR CONTACT CRIMPING AND CONTACT INSTALLATION AND REMOVAL REFER TO TE I.S. 408-7516.
- 10 GROUNDING INDENTS ON FRONT SHELL. (NOT SHOWN)

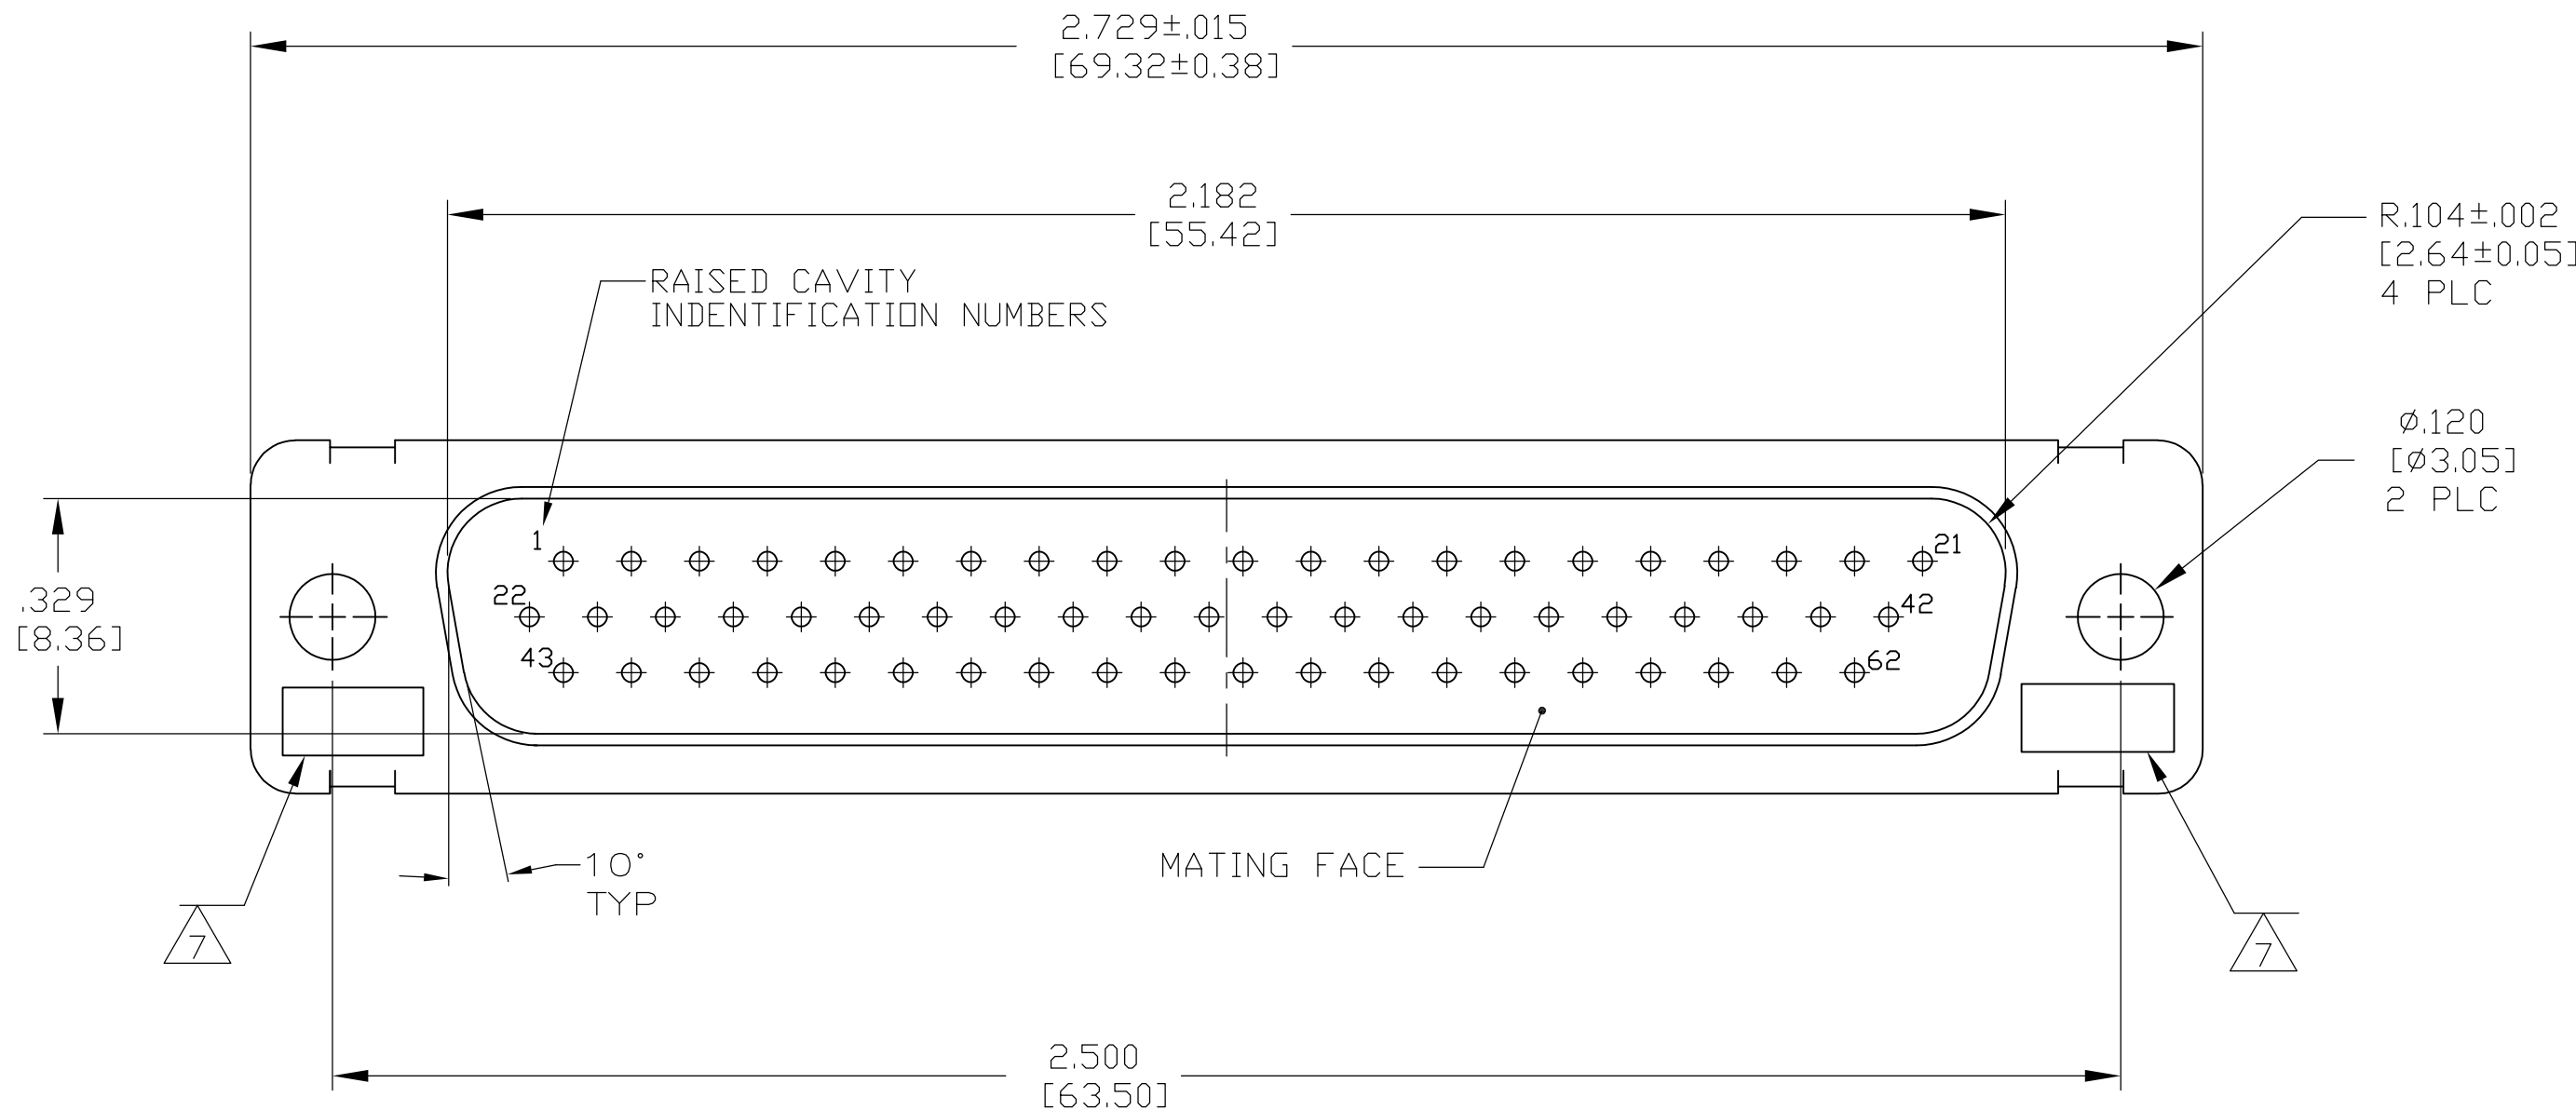

PRELIMINARY	10	2101592-2
	--	2101592-1
REMARKS		PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS 3-6-10	Tyco Electronics Corporation	
DIMENSIONS: INCHES [mm]		CHK R. LEASE 3-6-10	Harriaburg, PA 17105-3608	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. LEASE 3-6-10	NAME	
0 PLC ± .005 [0.13]		PRODUCT SPEC	KIT, PLUG ASSY, SIZE 4.62 POSN., SERIES 90, AMPLIMITE WITH IF SEAL AND GROMMET	
1 PLC ± .005 [0.13]		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO	
2 PLC ± .005 [0.13]		WEIGHT	A1 00779 C=2101592	
3 PLC ± .005 [0.13]		CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 1 REV C	
4 PLC ± .005 [0.13]				
ANGLES				
FINISH				
SEE CALLOUTS				