

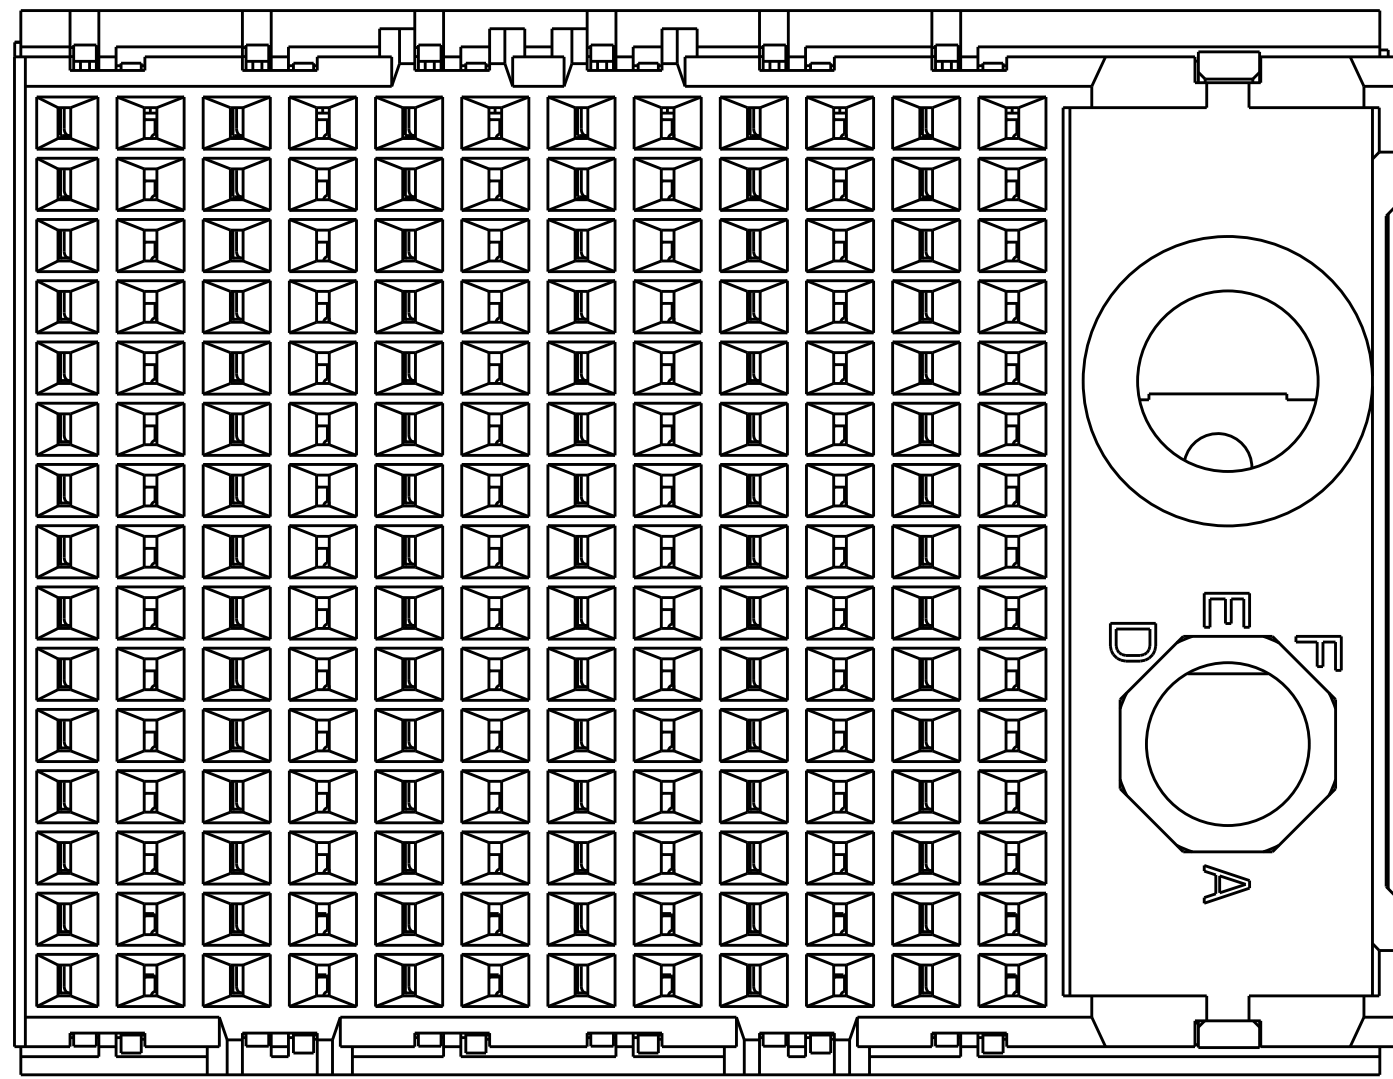
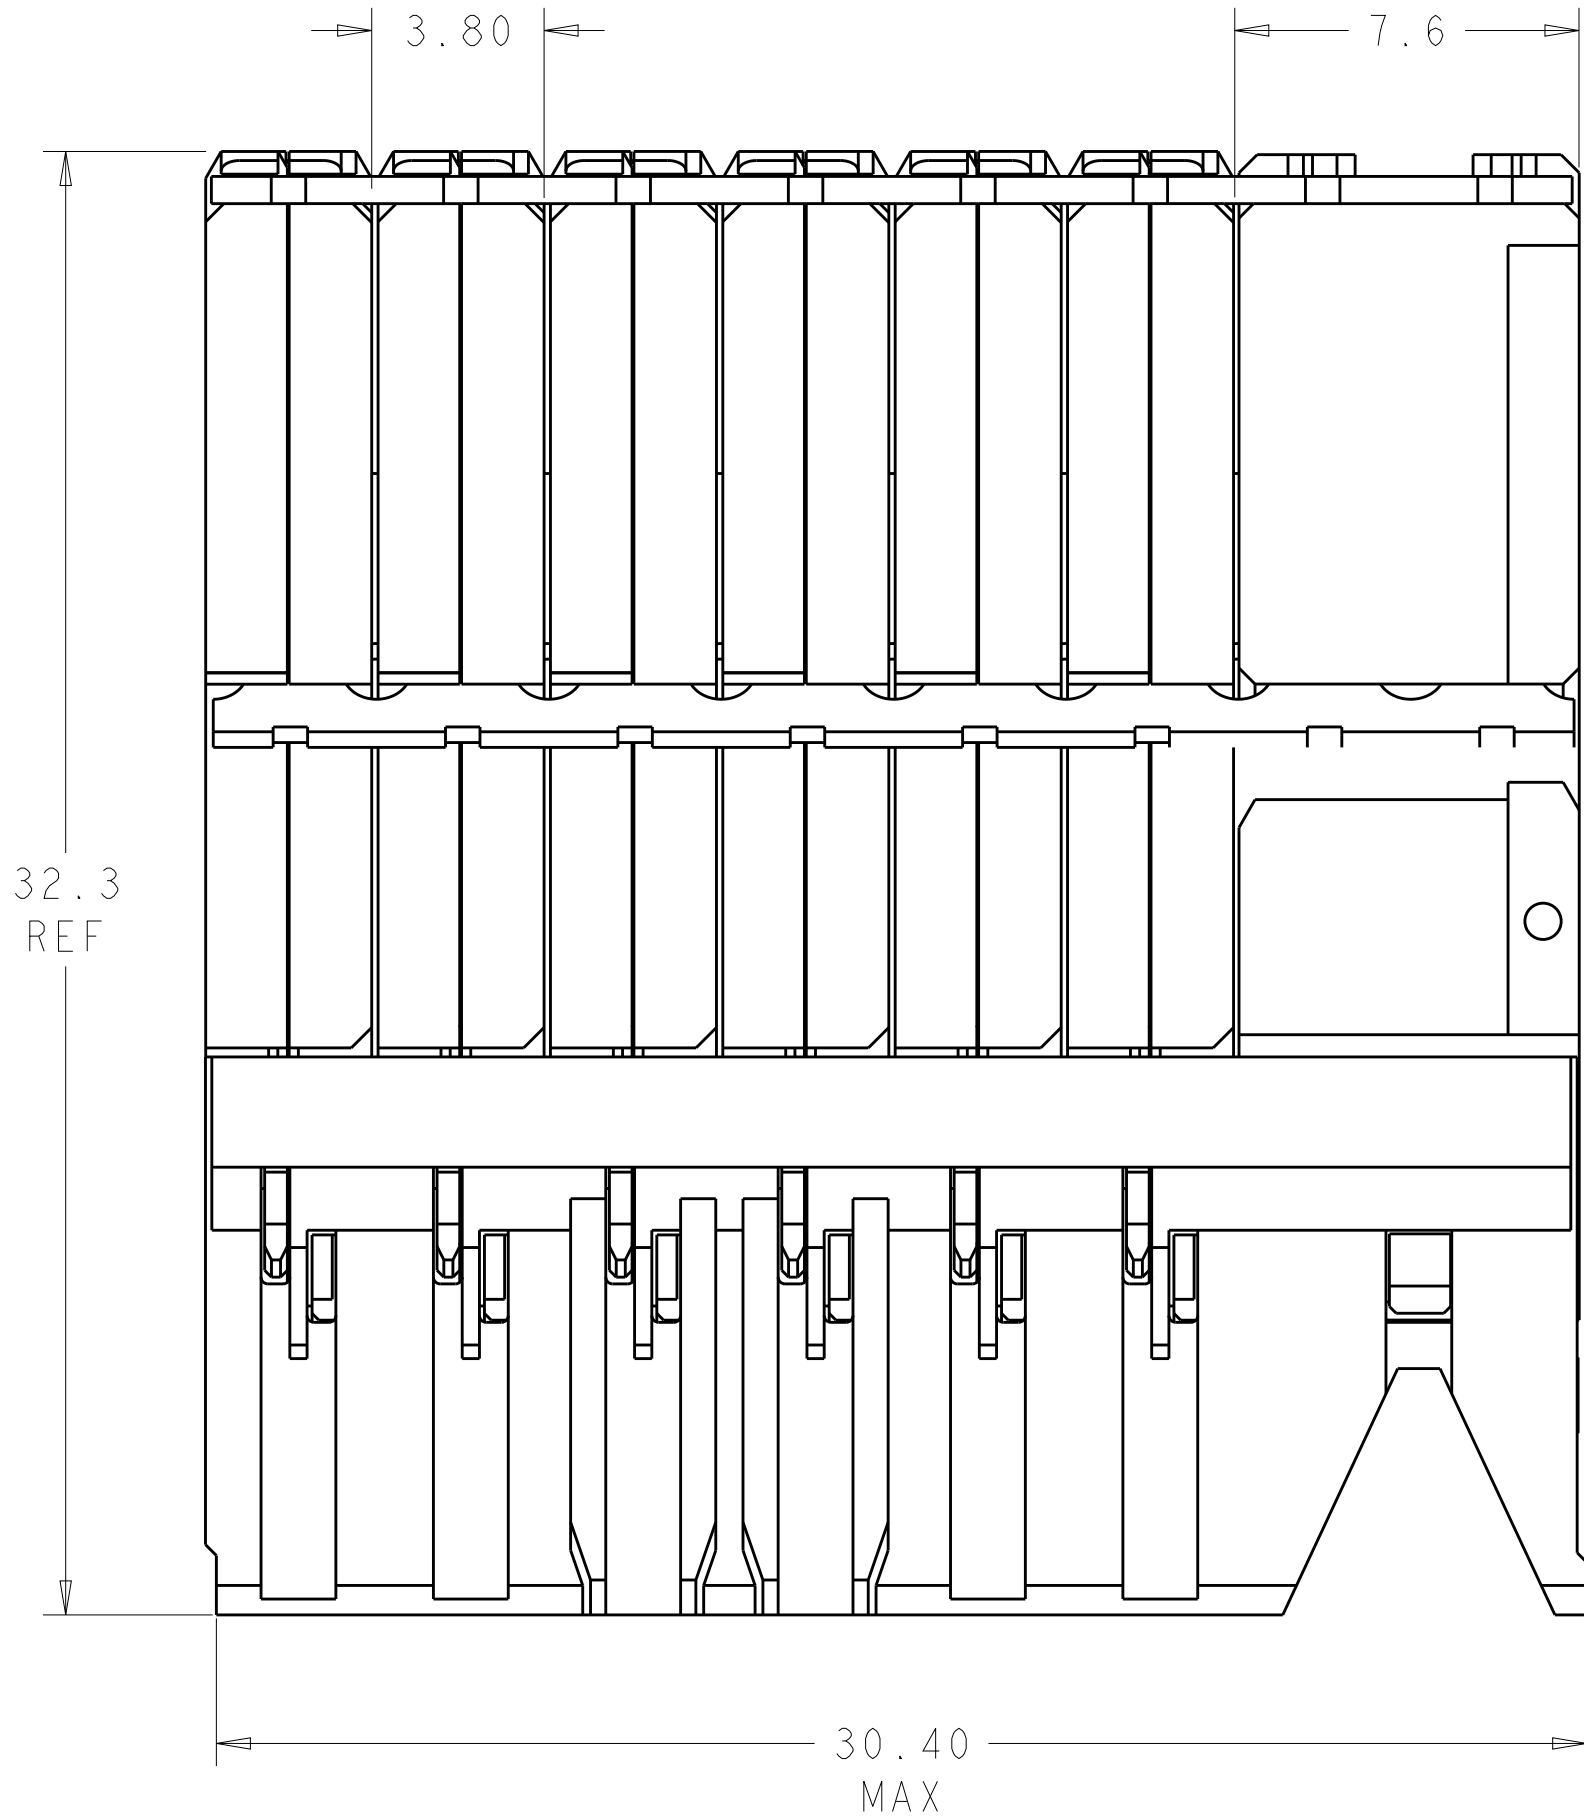


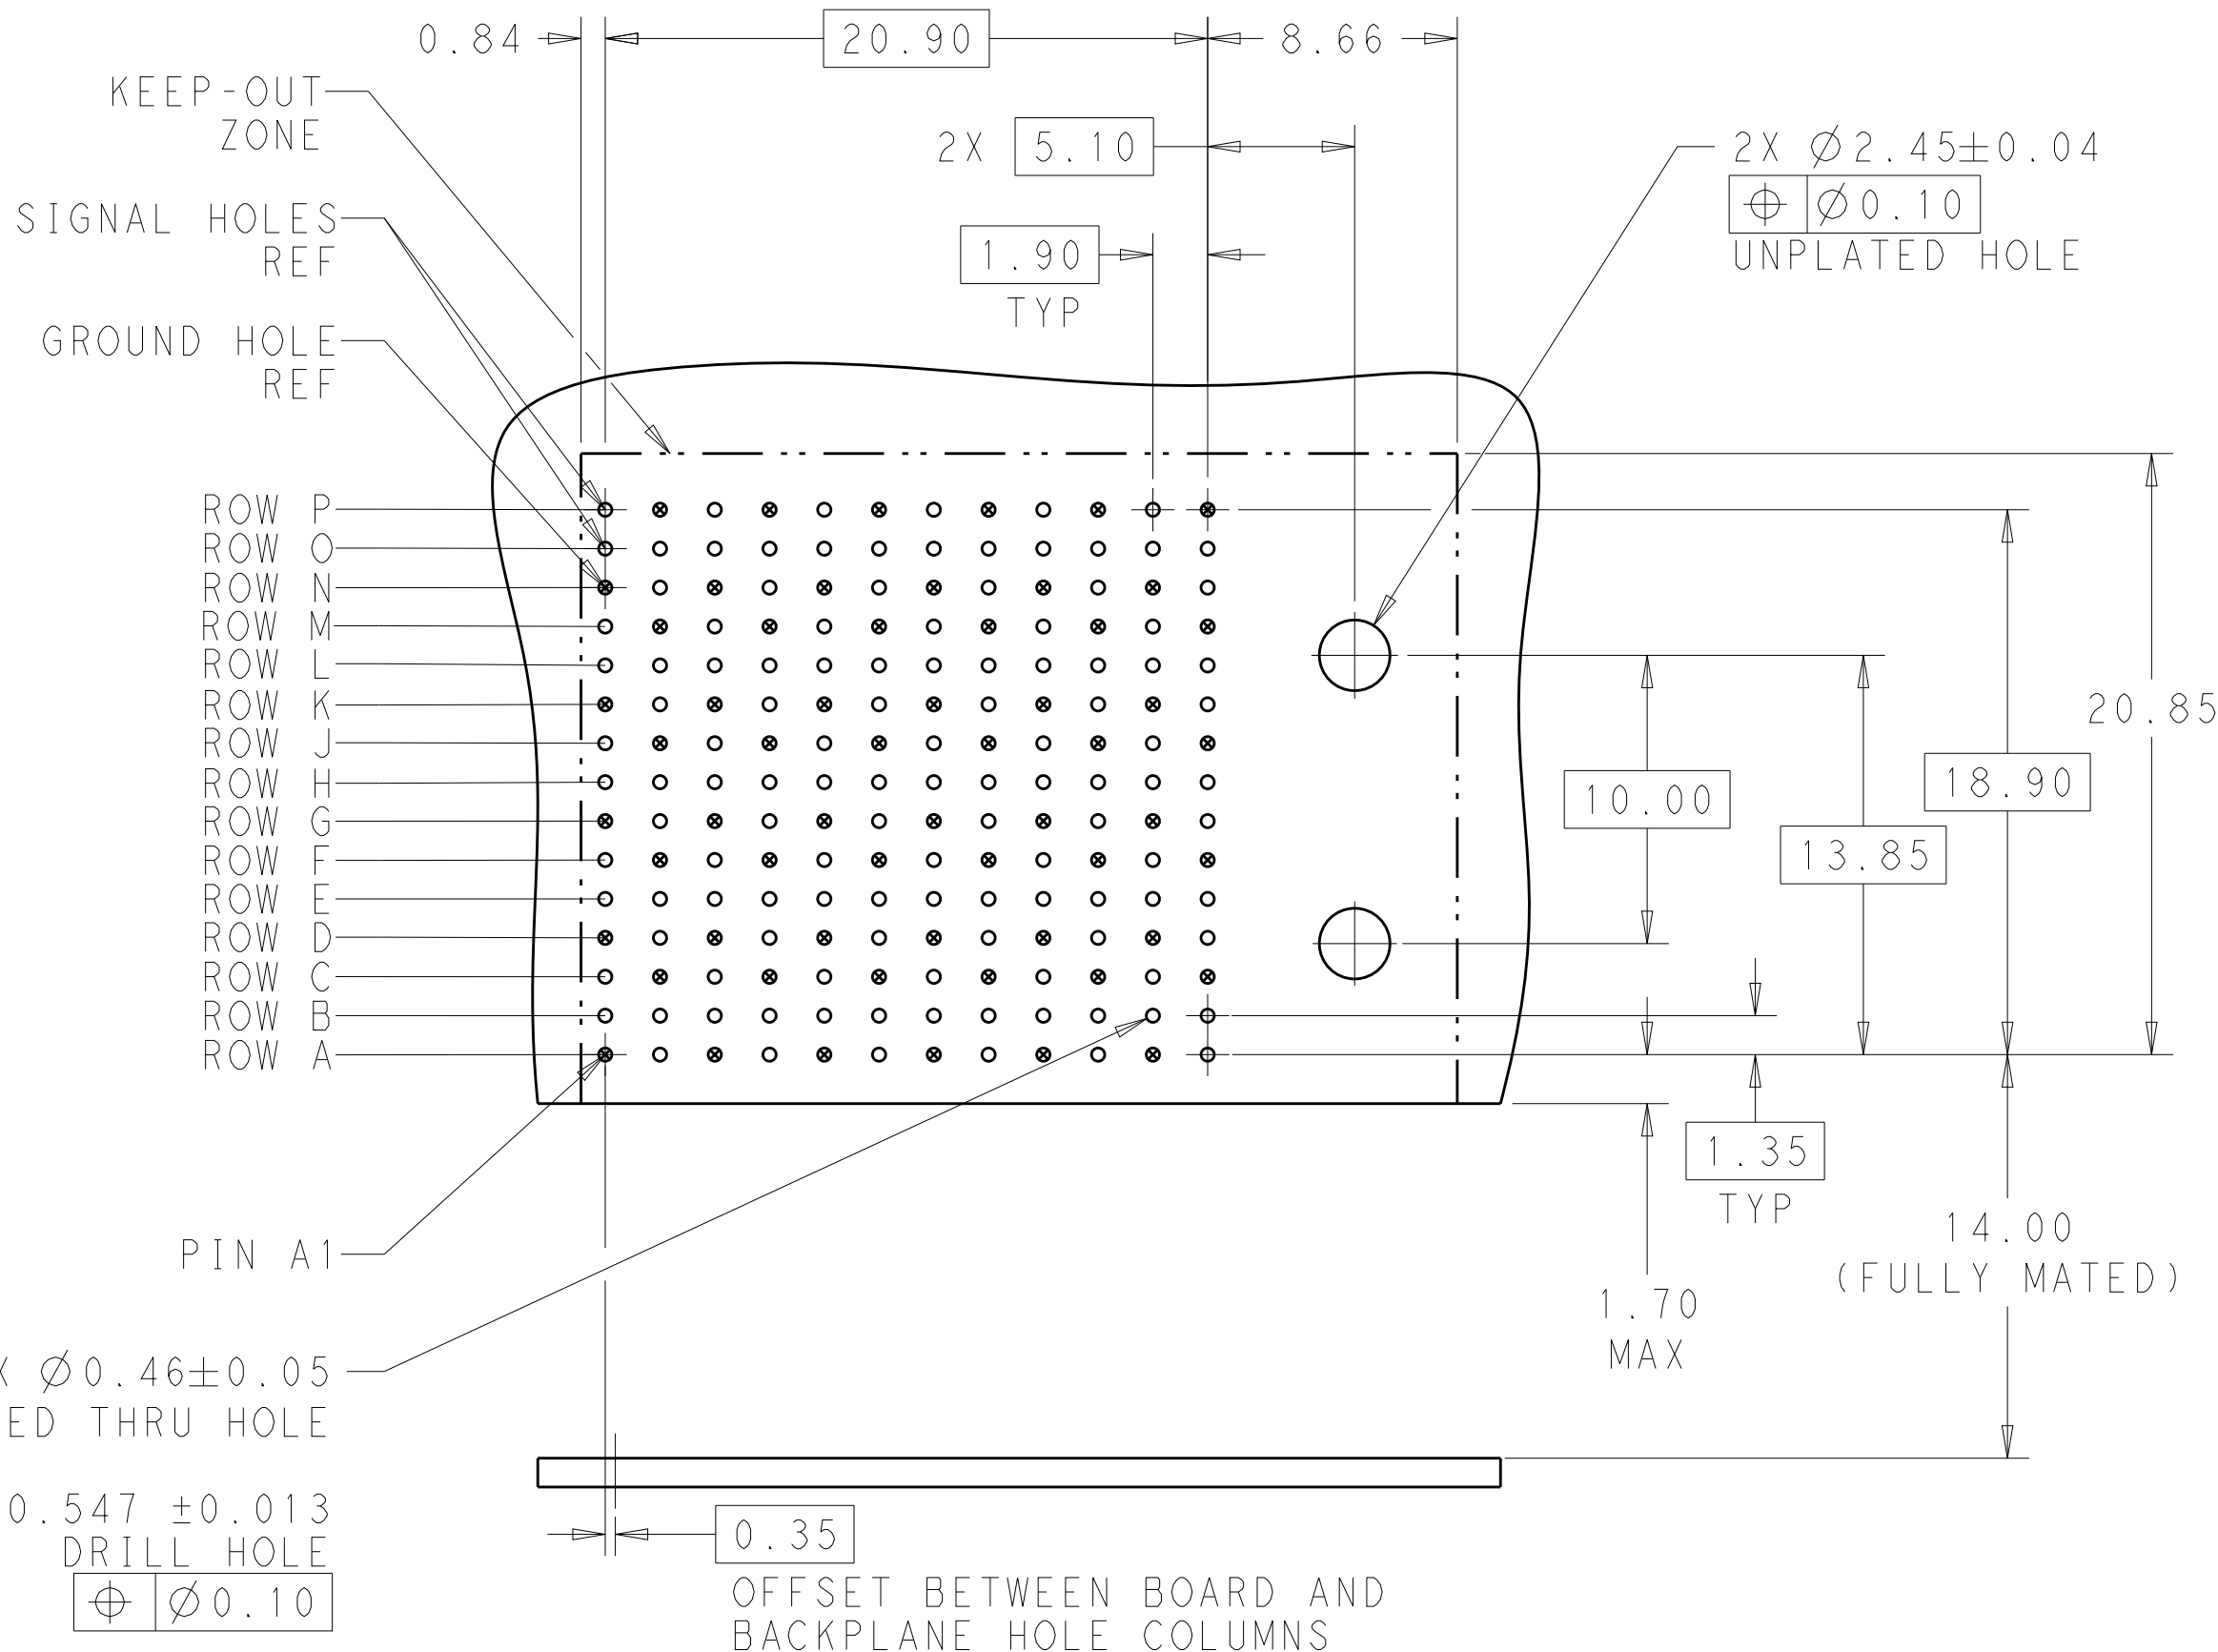

KEY POSITION CHART			
	NONE		
	A		E
	B		F
	C		G
	D		H

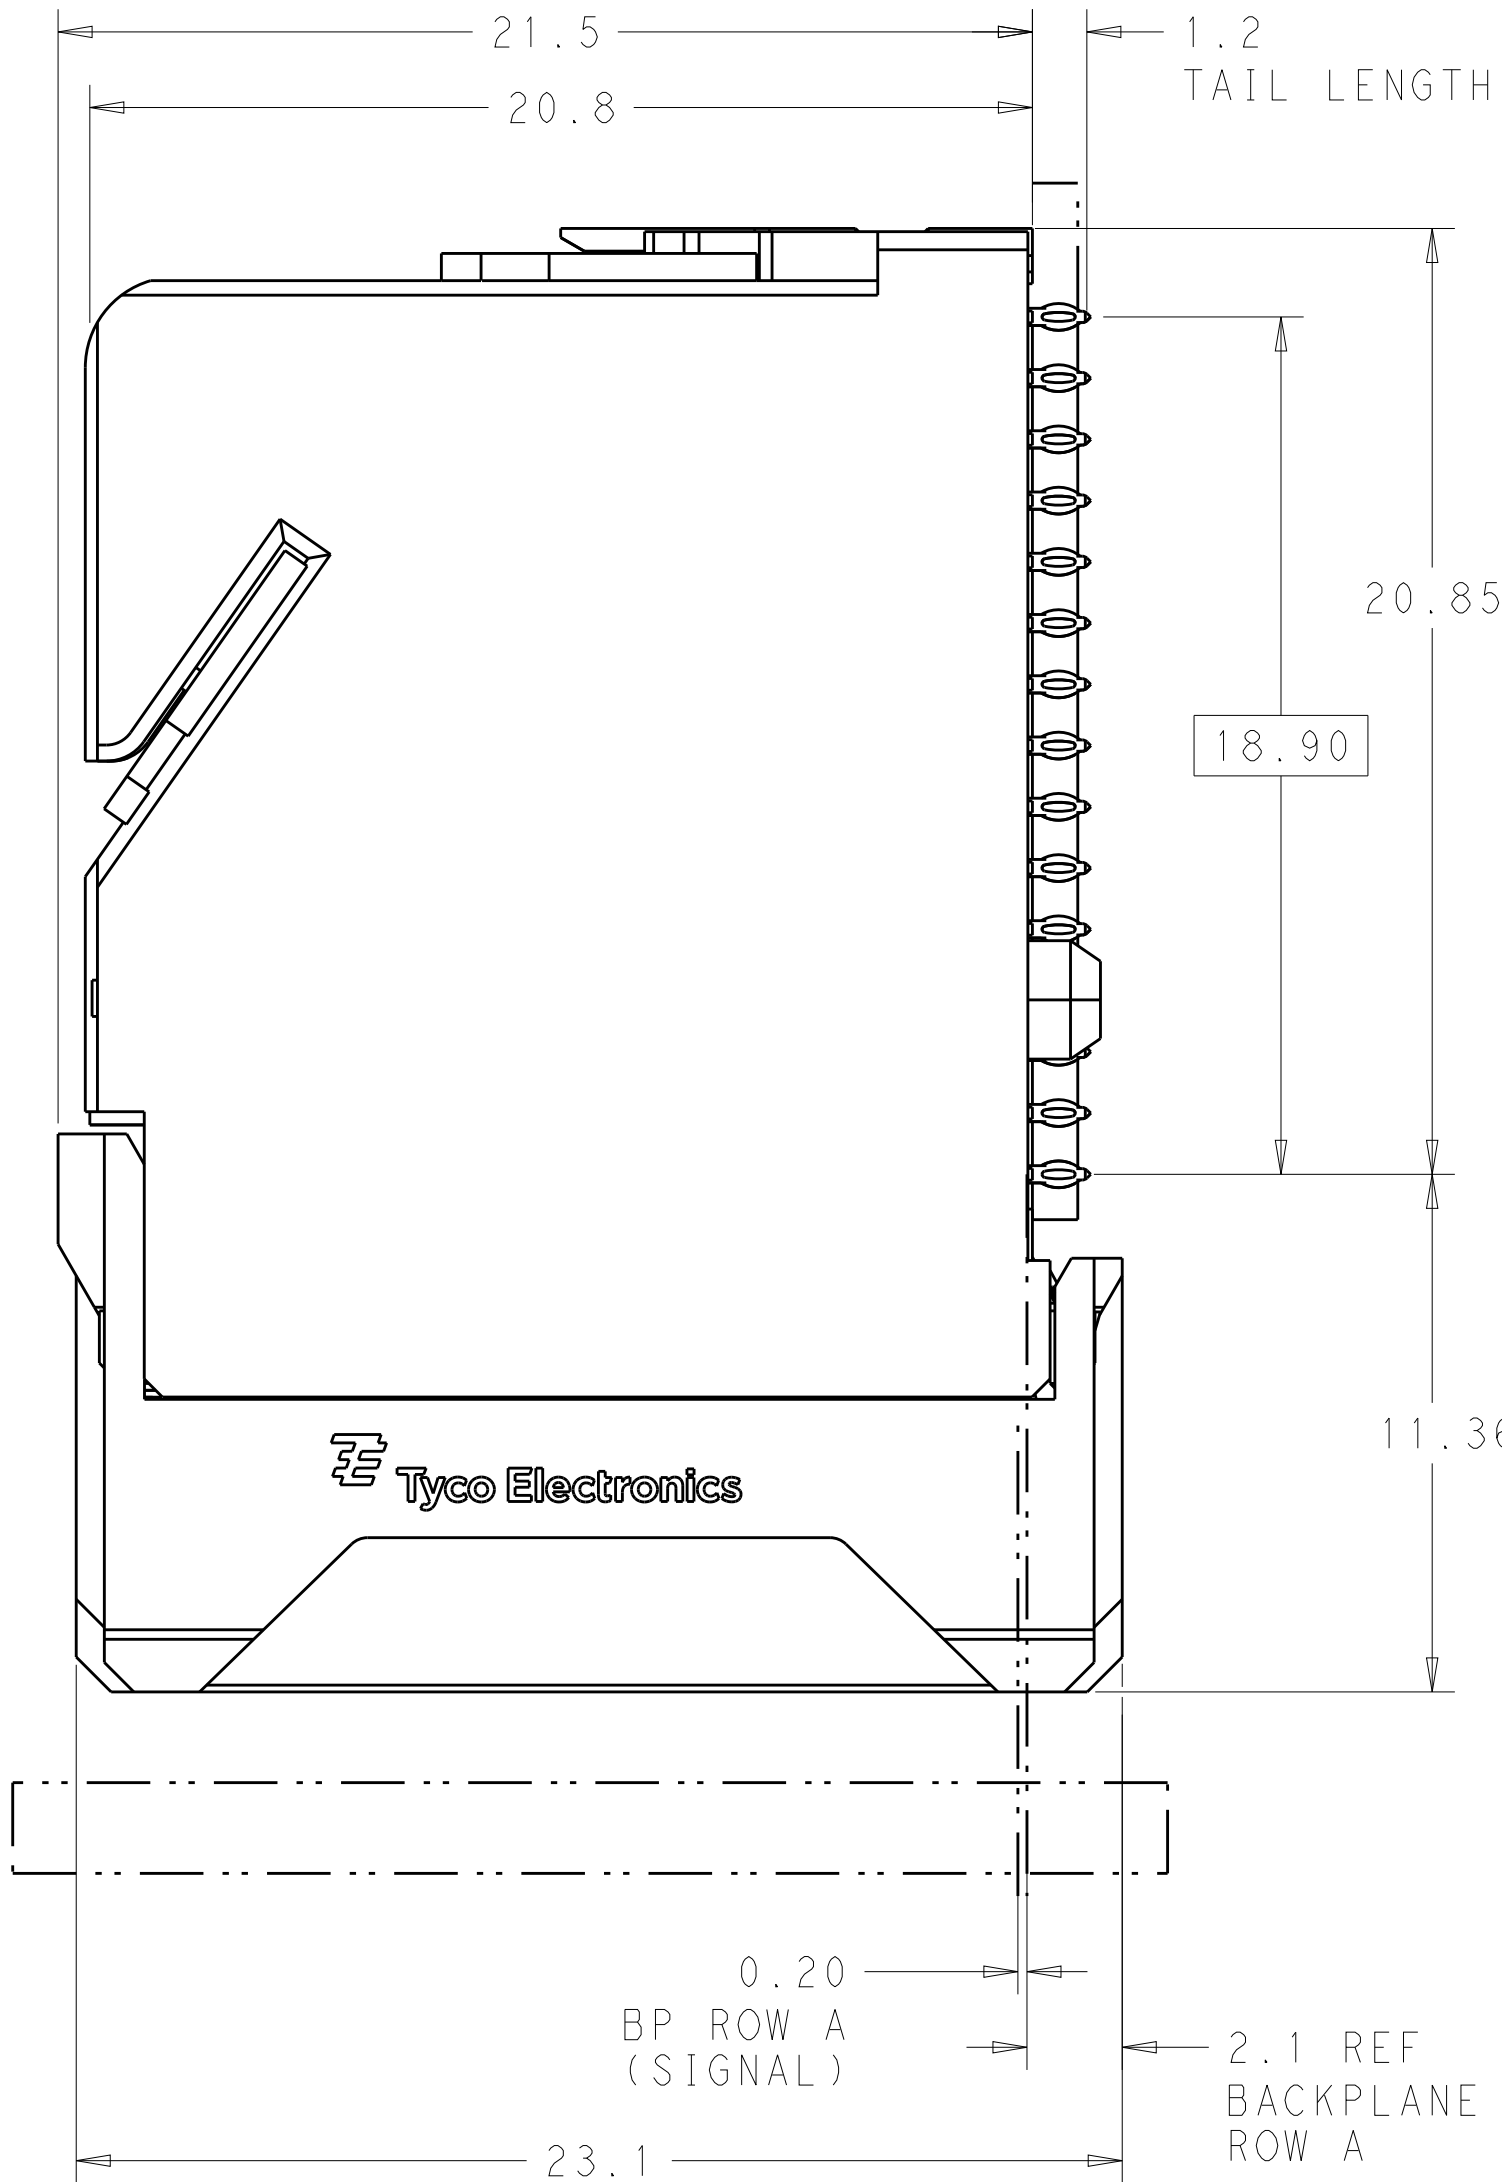


180X Ø0.547 ±0.013
DRILL HOLE
Ø0.10

OFFSET BETWEEN BOARD AND
BACKPLANE HOLE COLUMNS

RECOMMENDED PCB LAYOUT
MIN BOARD THICKNESS 1.0

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
B		REVISED PER ECO-15-004915	09APR2015	AP	DD

- 1 MATERIAL:
HOUSING: LCP, GLASS FILLED, UL94V-0.
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.
- 2 FINISH:
30µ" SELECTIVE GOLD IN CONTACT AREA. SELECTIVE TIN
ON PCB TAILS, NICKEL OVERALL.
3. CONNECTORS SUPPLIED WITH MOUNTING SCREWS.

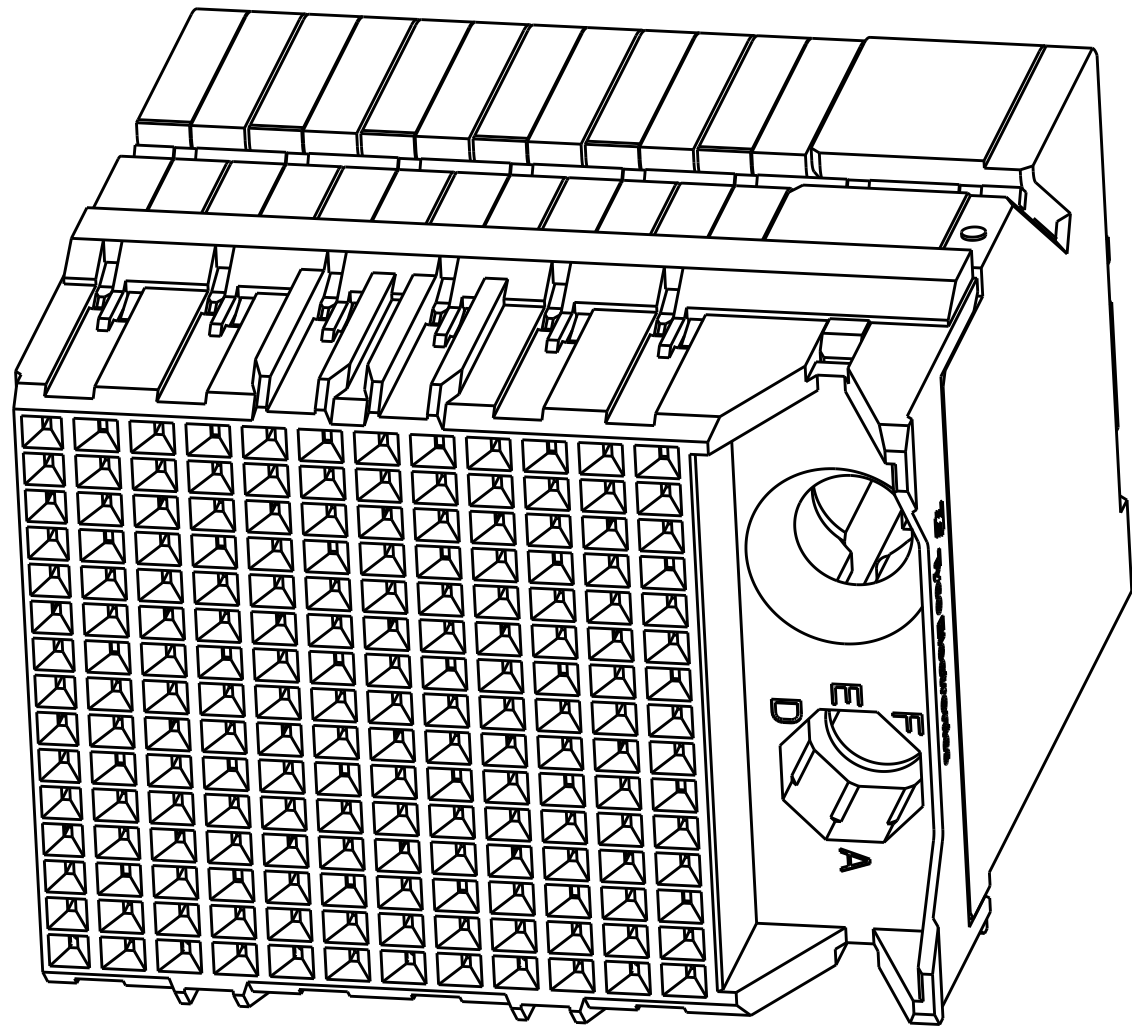

SCALE 4:1

REFER TO WWW.TE.COM
FOR PRODUCT AVAILABILITY

H	2	8-2110108-1
G	2	7-2110108-1
F	2	6-2110108-1
E	2	5-2110108-1
D	2	4-2110108-1
C	2	3-2110108-1
B	2	2-2110108-1
A	2	1-2110108-1
NONE	2	2110108-1
KEY POSITION		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: KIRAN HOLAL 09NOV2012	NAME: IMPACT, 5 PAIR, DAUGHTERCARD 12 COLUMN, RIGHT GUIDED, SIGNAL MODULE, 0.46 EYELET	
DIMENSIONS:		CHK: D. DIXON 09NOV2012		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD: D. DIXON 09NOV2012	PRODUCT SPEC	SIZE: CAGE CODE: DRAWING NO:
	0 PLC ±0.2 1 PLC ±0.13 2 PLC ±0.13 3 PLC ±0.13 4 PLC ±0.13	APPLICATION SPEC	WEIGHT	RESTRICTED TO
MATERIAL	SEE TABLE	Customer Drawing	A100779C=2110108	SCALE 6:1 SHEET 1 OF 1 REV B