


CABLE OUTLET POSITION 3

1:2


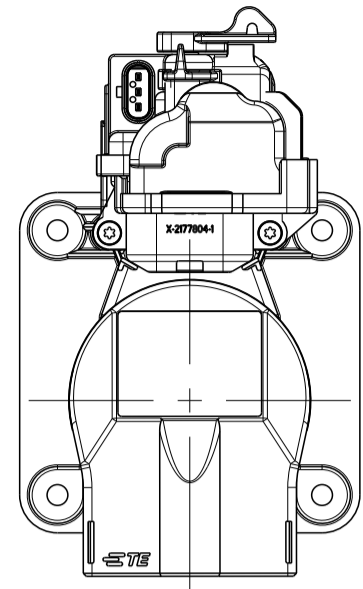


THE DRAWING SHOWS THE 2-DIMENSIONAL REFERENCE COMPONENT CONDITION OF THE ASSEMBLY TO IDENTIFY AND SPECIFY THE NECESSARY DIMENSIONS ONLY. THE DELIVERED PARTS MAY DEVIATE FROM THE DRAWING REGARDING THE ORIENTATION AND POSITION OF EACH COMPONENT (e.g. SLACK CABLE), SO FAR THE FUNCTIONALITY IS NOT CONCERNED.

DIE ZEICHNUNG ZEIGT DEN 2-DIMENSIONAL IDEALZUSTAND DES ZUSAMMENBAUTEILS BEZÜGLICH DER KOMPONENTEN ZUR IDENTIFIKATION UND SPEZIFIKATION DER NOTWENDIGEN DIMENSIONEN. HINSICHTLICH DER ORIENTIERUNG UND DER LAGE DER KOMPONENTEN (Z.B. BIEGESCHLAFTES KABEL) KÖNNEN DIE GELIEFERTEN TEILE VON DER ZEICHNUNG ABWEICHEN, SOFERN DIE FUNKTIONALITÄT NICHT BEEINTRÄCHTIGT IST.

REVISIONS				
REV.	DATE	BY	APPV.	DESCRIPTION
F	16 JUN 2016	JM	JJ	NOTES UPDATED, COMPONENT REVISED
G	27 NOV 2018	JM	JJ	COMPONENT (CABLE, 2 x 0.75 mm ²) REVISED
H	05 DEC 2020	DS	JJ	COMPONENT REVISED

INTERFACE VIEW
Schnittstellen Ansicht

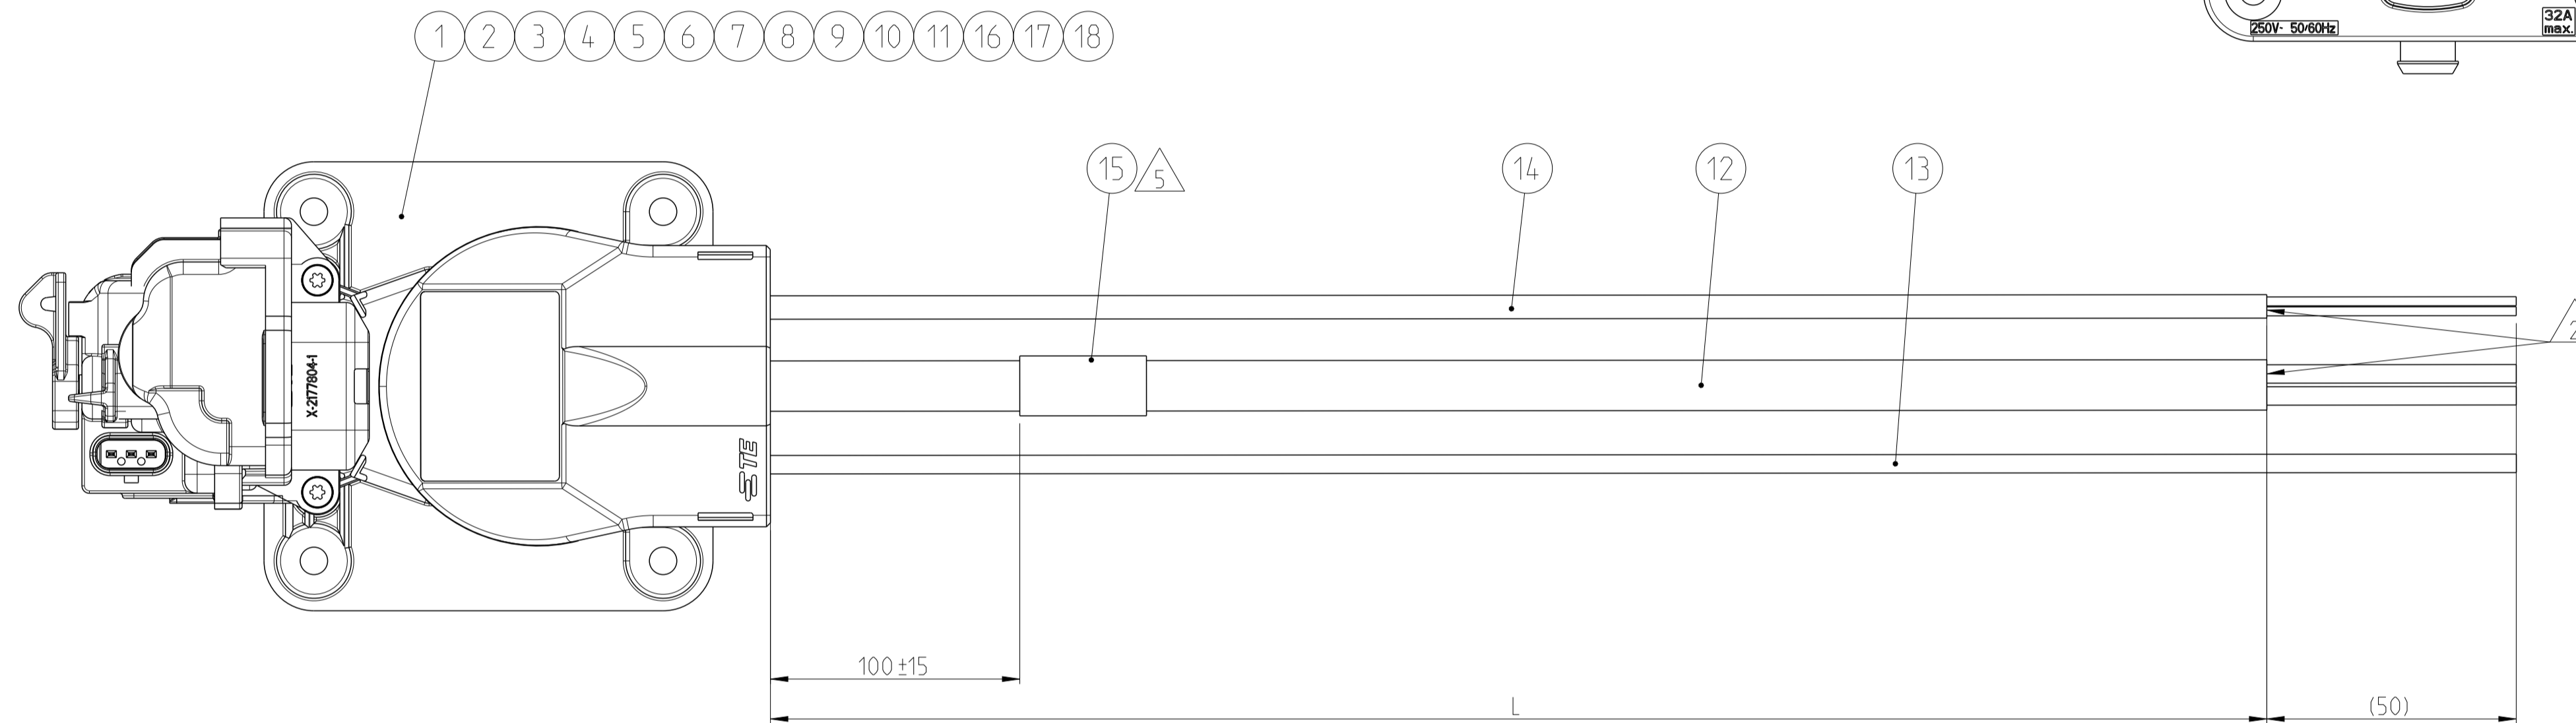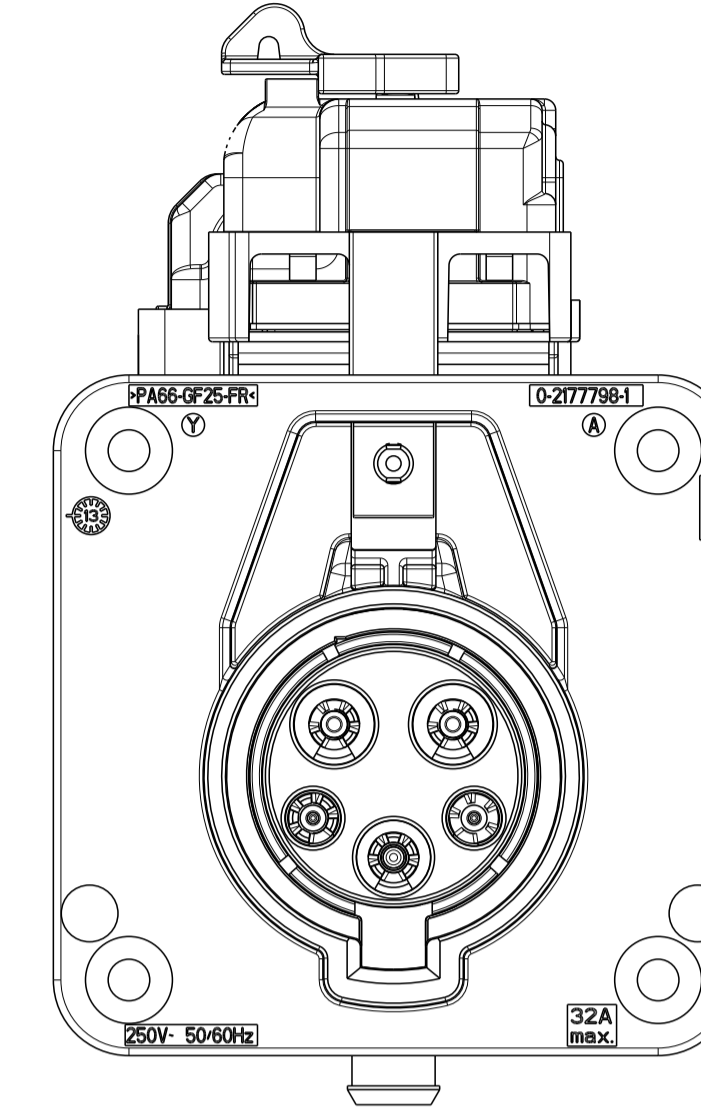

LENGTH SCHEDULE:
Laengentabelle:

TE PART NO.	REV.	LENGTH L (mm)	TOL.	CABLE OUTLET POSITION
2-2208877-1	H	1000	+30	Position 3
2-2208877-5	H	5000	+60	

WIRING SCHEDULE:
Belegungsplan:

CAVITY-NO.	IDENTIFICATION	WIRE COLOUR	WIRE SECTION
1	L1	RED	4mm ² (ITEM 12)
2	L2/N	BROWN	4mm ² (ITEM 12)
3	GROUND/EARTH	BROWN	4mm ² (ITEM 13)
4	CP	BROWN/WHITE	0.75mm ² (ITEM 14)
5	CS	WHITE	0.75mm ² (ITEM 14)

5 LABEL LEGEND:
Label Beschriftung:



TE PART NO., CURRENT REVISION
TE Teilenummer, aktuelle Revision

PRODUCTION DATE
Produktionsdatum

NOTES

- PACKAGING ACCORDING SPECIFICATION V2208877.
- STRIPPED ONLY OUTER JACKET AND BRAID. ELECTRICAL TESTING IS ACCORDING APPLICATION SPECIFICATION.
- APPLICATION SPECIFICATION: 114-94163-1 CHARGE INLET IEC 62196-2 TYPE 1.
- CUTTING LENGTHS TO BE FIXED BY MANUFACTURING.
- MANUFACTURING CODE: TE PART NO., CURRENT REV. LEVEL AND DATE CODE (DD.MM.YY). TO BE PRINTED ON LABEL (ITEM 17). LABEL TO BE APPLIED TO THE CABLE AFTER SUCCESSFUL ELECTRICAL TEST.

1	RESISTOR, 2K7, 1%	18
2	CONTACT KIT, R5, INLET TYPE 1, PLATED	17
3	CAB TIE, CLIP, HELL, T18R-HR-N46	16
1	LABEL, HELL	15
SPR table	CABLE, 2 x 0.75 mm ² , BLACK	14
SPR table	CABLE, 4 mm ² , BROWN	13
SPR table	CABLE 2 x 4.0 mm ² , BRAID	12
5	O-RING, 3 x 1.5	11
2	PIN DIA 1.5, CP/CS	10
1	PIN DIA 2.8, PE	9
2	PIN DIA 3.6, L/N, ASSY	8
3	SELF TAPPING SCREW	7
2	FAMILY SEAL, MIXED, Vers.1	6
1	INSULATION COVER, TE, COVER INLET	5
1	CABLE FIXATION, TE, COVER INLET	4
1	ACTUATOR, LOCKING UNIT, ASSY	3
1	2. LOCK, TE, IEC62196-2 TYPE 1	2
1	5 POS, MIXED, HSG, IEC62196-2 TYPE 1	1
QTY	DESCRIPTION	ITEM NO.
X-Y		
-	WEIGHT OF ASSY NO. [g]	

TOLERANCING EN ISO 8015
TOLERIERUNG EN ISO 8015

DIESE ZEICHNUNG IST EIN KONTROLLIERTES DOKUMENT.
BEMASSUNGEN UND TOLERANZEN GEMAESS GPS (ISO STANDARDS).

THIS DRAWING IS A CONTROLLED DOCUMENT.
DIMENSIONING AND TOLERANCING PER GPS (ISO STANDARDS).

TOLERANCES UNLESS OTHERWISE SPECIFIED:
ALLE DIMENSIONEN

0	PLC	±
1	PLC	±
2	PLC	±
3	PLC	±
4	PLC	±
5	PLC	±

ANGLES/WINKEL: °

FINISH/OBERFLÄCHE/FARBEN

MATERIAL: -

WEIGHT GEWICHT: -

CUSTOMER DRAWING

SIZE: A | CAGE CODE: 00779 | DRAWING NO: ©=2208877

RESTRICTED TO NON-PUR: -

SCALE MASSSTAB: 1:1

SHEET BLATT: 1 OF 1

REV: H

2- X AS SHOWN
wie dargestellt



NAME: HV, CHARGE INLET TYPE 1, HYB ASSY, 4 sqmm