THIS DRAWING IS UNPUBLISHED.
VERÖFFENTLICHTE ZEICHNUNG
© COPYRIGHT 2014 BY TE Connectivity

RELEASED FOR PUBLICATION 2014
FREI FUER VEROEFFENTLICHUNG
ALL RIGHTS RESERVED.
ALLE RECHTE VORBEHALTEN.

MATED WITH 6
PASSEND ZU

LOC	DIST
A1	-

PROJEKT NR.:

REVISIONS
AENDERUNGEN

P	LTR	DESCRIPTION BESCHREIBUNG	DATE	DWN	APVD
	A	NEW DRAWING	29JUL2014	RW	Thiel
	B	CPA CHANGED	28AUG2014	AW	Thiel
	B1	SUPERSEEDED	16DEC2019	AW	DM

CODINGS / KODIERUNGEN

2:1

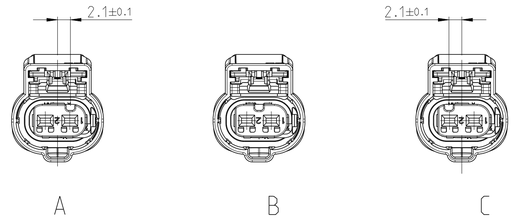

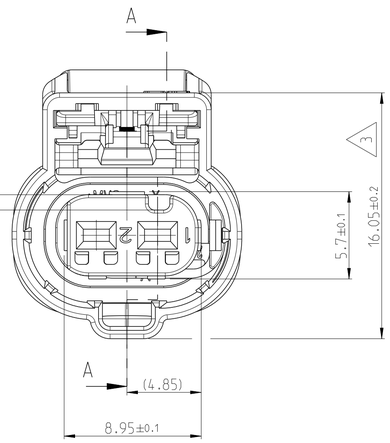

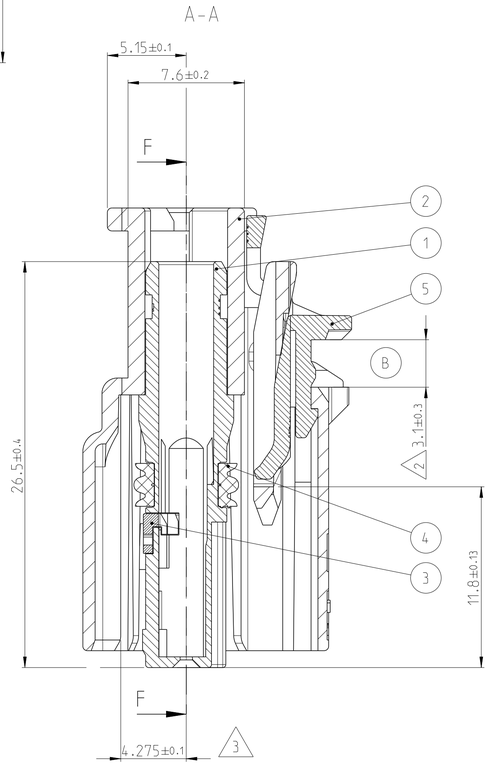

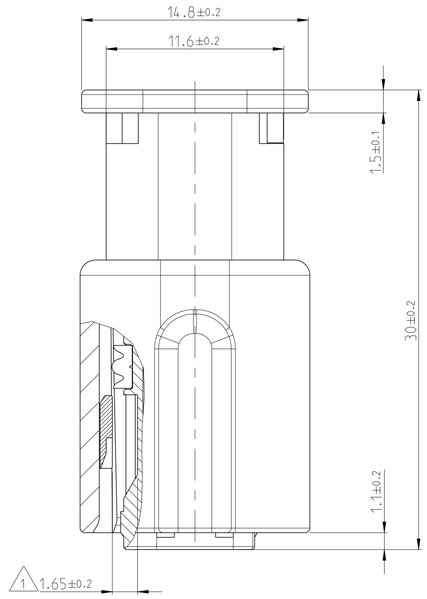

1. SUPPLY CONDITION: RETAINER ITEM 3 IN PRE-LOCKED POSITION AFTER CONTACT LOADING AND BEFORE CONTACT EXTRACTION TO DRIFT IN THIS DIRECTION (1.65MM)
2. SUPPLY CONDITION: CPA ITEM 5 IN PRE-LOCKED POSITION AFTER MATING TO DRIFT (3.1MM) IN THIS DIRECTION (LOCKED) BEFORE PUSHING THE LOCKING LATCH (UNMATING) TO DRIFT (3.1MM) IN REVERSE DIRECTION (PRE-LOCKED)
3. WARPAGE PERMITTED TO MAX 0.5
4. BULK PACKAGED
5. USED TOGETHER WITH CABLE FIXATION 2208939-1

5-...-1 AS SHOWN

1. LIEFERZUSTAND: TEIL POS 3 IN VORRASTSTELLUNG NACH KONTAKTBESTUECKUNG UND VOR KONTAKTENTNAHME IN DIESER RICHTUNG 1.65 MM VERSCHIEBEN
2. LIEFERZUSTAND: CPA POS 5 IN VORRASTSTELLUNG NACH STECKUNG IN DIESER RICHTUNG VERSCHIEBEN (3.1MM) VOR DRUECKEN DES VERRIEGELUNGSHEBELS (TRENNEN) ENTGEGEN DIESER RICHTUNG IN VORRASTSTELLUNG VERSCHIEBEN (3.1MM)
3. VERZUG ZULAESSIG BIS MAX 0.5MM
4. VERPACKT ALS SCHUETTGUT
5. ZUSAMMEN MIT KABELFIXIERUNG 2208939-1 EINGESETZT

6

WIRE / LEITER			HPF 1.2		
Ø [MM]	SIZE [MM²]	TYPE	CONTACT/WIRE SEAL KONTAKT/LEITERDICHTG	MATING PART GEGENSTUECK	EXTRACTION TOOL ENTRIEGELUNGSWERKZEUG
1.2-1.4	0.35	FLR	2208363 / 967067-2 (YELLOW)	ACC. TO 114-18679-3	3-1579018-4
1.4-1.6	0.5	FLR	2208362 / 967067-1 (GREEN)		
1.7-1.9	0.75	FLR	2208360 / 967067-1 (GREEN)		
1.9-2.1	1.0	FLR	2208360 / 967067-1 (GREEN)		
PLUG BLINDSTOPFEN	-	-	967056-1 (BLUE)		

5-...-1 WIE GEZEICHNET

SUPERSEEDED BY 2297790

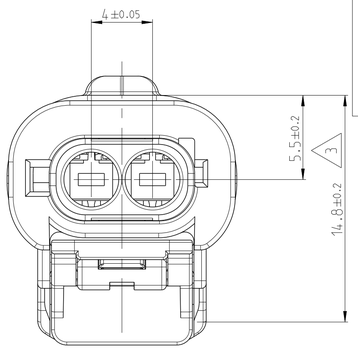

COD REV.	5-2208920-3	5-2208920-2	5-2208920-1	TE-NO.	DESCRIPTION	MATERIAL	COLOUR	ITEM
	X	X	X	1	CPA	PA46-GF15	RED RAL3003	5
	X	X	X	1	SEAL	VMQ	NATURE	4
	X	X	X	1	RETAINER, 2 POSN	PA66-GF15	VIOLET RAL4006	3
	X	X	X	1	PROTEC. COVER MCON 1.2, 2 POSN	PA66	BLACK RAL9011	2
C	X			1	2POS, HPF 1.2, REC HSG, SEALED	PA66-GF15	LIGHT BLUE RAL5012	1
B		X		1	2POS, HPF 1.2, REC HSG, SEALED	PA66-GF15	NUT BROWN RAL8011	1
A			X	1	2POS, HPF 1.2, REC HSG, SEALED	PA66-GF15	BLACK RAL9011	1

TOLERANCING ISO 8015
TOLERIERUNG ISO 8015

DIESE ZEICHNUNG IST EIN KONTROLLIERTES DOKUMENT.
BEMASSUNGEN UND TOLERANZEN GEMAESS GPS (ISO STANDARDS).

THIS DRAWING IS A CONTROLLED DOCUMENT.
DIMENSIONING AND TOLERANCING PER GPS (ISO STANDARDS).

DWN R.WIENZIERS 29JUL2014
CHK F. Thiel 29JUL2014
APVD -

DIMENSIONS: MASSEINHEITEN: mm
TOLERANCES UNLESS OTHERWISE SPECIFIED: ALLGEMEINTOLERANZEN
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES/WINKEL ±1°
MATERIAL -
FINISH/OBERFLAECHE/FARBE -
WEIGHT GEWICHT -

PRODUCT SPEC PRODUKTSPEZ. 108-94415
APPLICATION SPEC VERARBEITUNGSSPEZ. 114-94316

TE Connectivity

NAME
2 POS. HPF1.2, REC HSG, ASSY, SEALED
2 POL, HPF1.2, FL.KONT.GEH., KOMPL., DICHT
-

SIZE	CAGE CODE	DRAWING NO ZEICHNUNGS-NR.	RESTRICTED TO NUR FUER
A1	00779	C-2208920	-

Customer Drawing /KUNDENZEICHNUNG
SCALE MASSSTAB 5:1 SHEET BLATT 1 OF VON 1 REV B1