

THIS DRAWING IS UNPUBLISHED.




RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT - By -

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	OFFICIAL VERSION RELEASE	18DEC2015	F.Y	X.X
	A1	PER ECR-16-006247	16JUN2016	F.Y	X.X

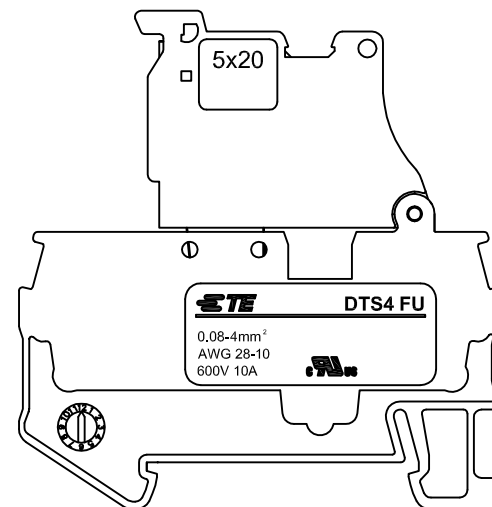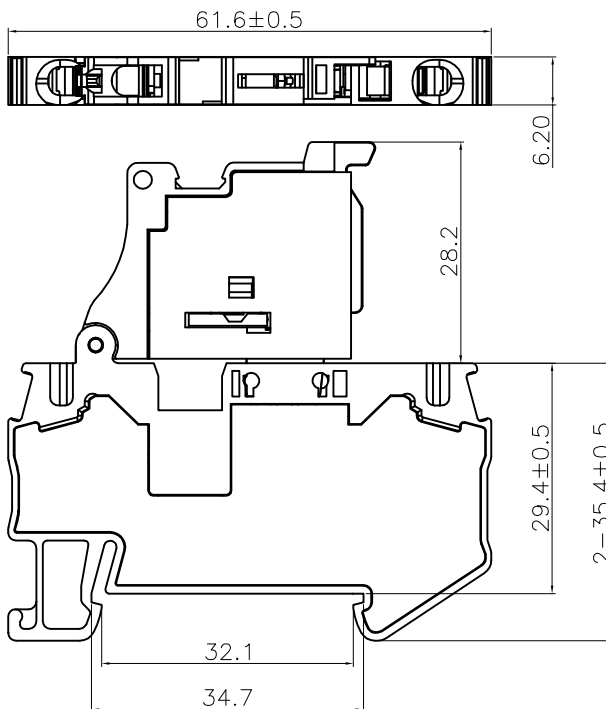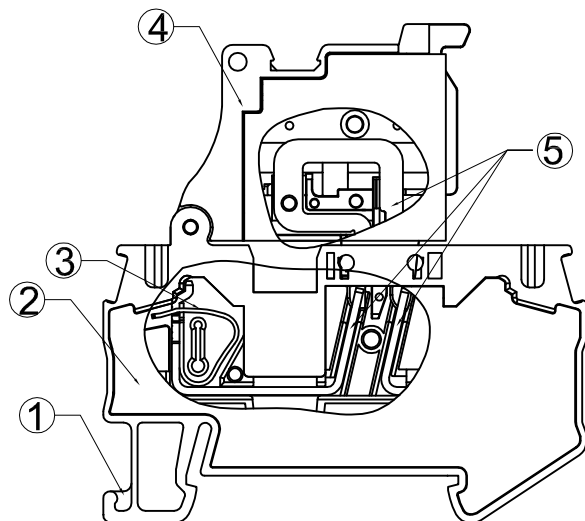

NOTE:

1. Material: See Table
2. Rated current & voltage : 10Amp 600V
3. Rated surge voltage: 6KV
4. Operation temperature : -40°C to +105°C
5. Wire strip length: 8mm -10mm
6. Suitable wire size : 28 - 10 AWG
7. Requirement for environmental substance must be compliance with ROHS and REACH.
8. Recommended support rail requirements refer to 114 application specification.

5	TERMINAL	COPPER	3	TIN PLATED
4	HOUSING 2	THERMOPLASTIC	1	
3	SPRING CLAMP	STAINLESS STEEL	2	
2	COVER	THERMOPLASTIC	1	
1	HOUSING	THERMOPLASTIC	1	
ITEM	COMPONENTS	MATERIAL	Q'TY	PLATING

DTS4 FU SSW	2271582-1	BLACK
TE SERIES No.	PART NUMBER	COLOR

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN FENCER YU 16JUN2016	STE TE Connectivity	
		CHK KOBBOY ZHAO 16JUN2016		
DIMENSIONS: mm		APVD XIANG XU 16JUN2016	NAME	
		PRODUCT SPEC 108-137138	4mm~2 WIRE 1 IN 1 OUT SPRING CLAMP TERMINAL BLOCK WITH BIG SWITCH	
		APPLICATION SPEC 114-137138		
MATERIAL -	FINISH -	WEIGHT 10.54 g	SIZE A3	CAGE CODE 00779
CUSTOMER DRAWING			DRAWING NO C-2271582	RESTRICTED TO -
			SCALE 1:1	SHEET 1 OF 1
			REV A1	