



REVISIONS				
P	LTN	DESCRIPTION	DATE	APVD
1		PRELIMINARY	11APR2016	TS GF
2		REV LABEL FORMAT	30AUG2016	TS GF
3		CHANGE CABLE AWG FROM 33 TO 32	03NOV2016	TS GF
4		ADDED NOTE 6	07JUL2017	TS GF

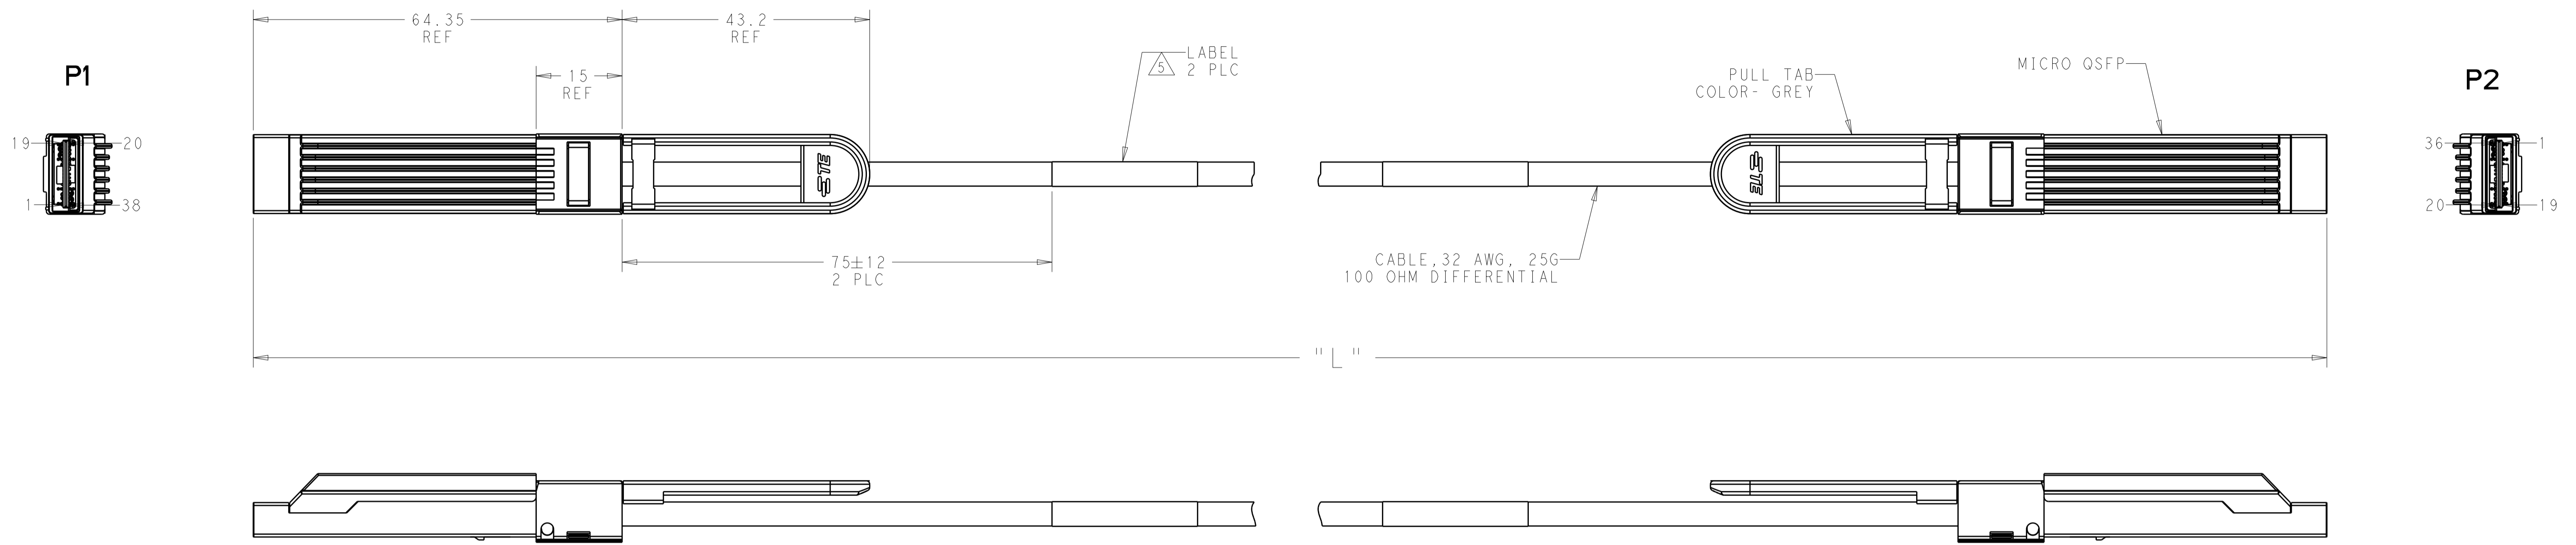

1. CHARACTERISTIC IMPEDANCE: 100±10 OHMS (MEASURED DIFFERENTIALLY)
2. CABLE ASSEMBLY TESTED FOR OPENS, SHORTS AND PROPER EEPROM PROGRAM.
3. PRODUCT AND PROCESSING MEETS THE REQUIREMENTS OF TE STANDARD TEC-138-702.
4. SEE SHEET 2 FOR WIRING SCHEMATIC.

5. LABEL INFORMATION: -1 SHOWN

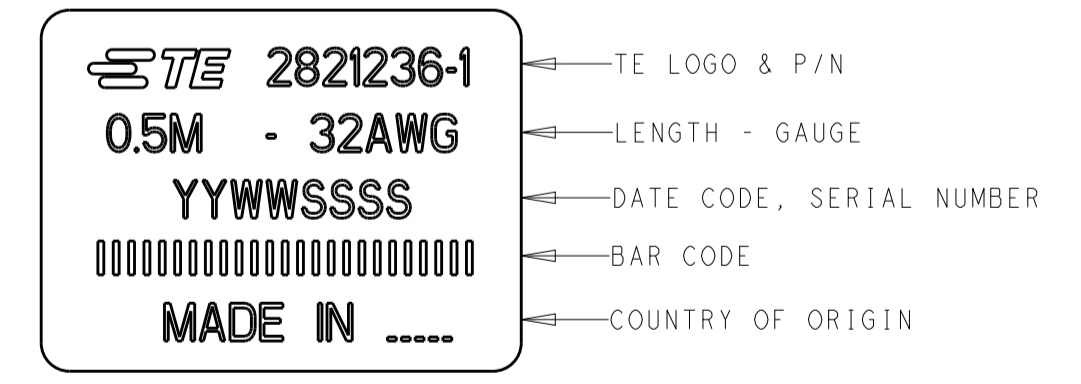

6. DUE TO SHORT CABLE LENGTH, THE PART NUMBERS INDICATED MAY NOT MEET IEEE802.3bj MINIMUM INSERTION LOSS LIMITS.


2000±40	32 AWG	2821236-3
1000±40	32 AWG	2821236-2
500±25	32 AWG	2821236-1
L	WIRE GAGE	PART NO

THIS PRODUCT HAS NOT COMPLETED VALIDATION AND QUALIFICATION TESTING

PRELIMINARY NOT RELEASED FOR PRODUCTION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. SMITH 11APR2016 CHK G. FRANKLIN 11APR2016 APVD G. FRANKLIN 11APR2016	STE TE Connectivity
DIMENSIONS: mm 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±	TOLERANCES UNLESS OTHERWISE SPECIFIED: FINISH ±	NAME CABLE ASSEMBLY MICRO QSFP TO MICRO QSFP PRODUCT SPEC 32 AWG APPLICATION SPEC	SIZE A1 CAGE CODE - DRAWING NO C=2821236
MATERIAL	FINISH	WEIGHT	RESTRICTED TO
		CUSTOMER DRAWING	SCALE 7:4 SHEET 1 OF 2 REV 4

REVISIONS				
P.	LTN.	DESCRIPTION	DATE	APVD.
		SEE SHEET 1		

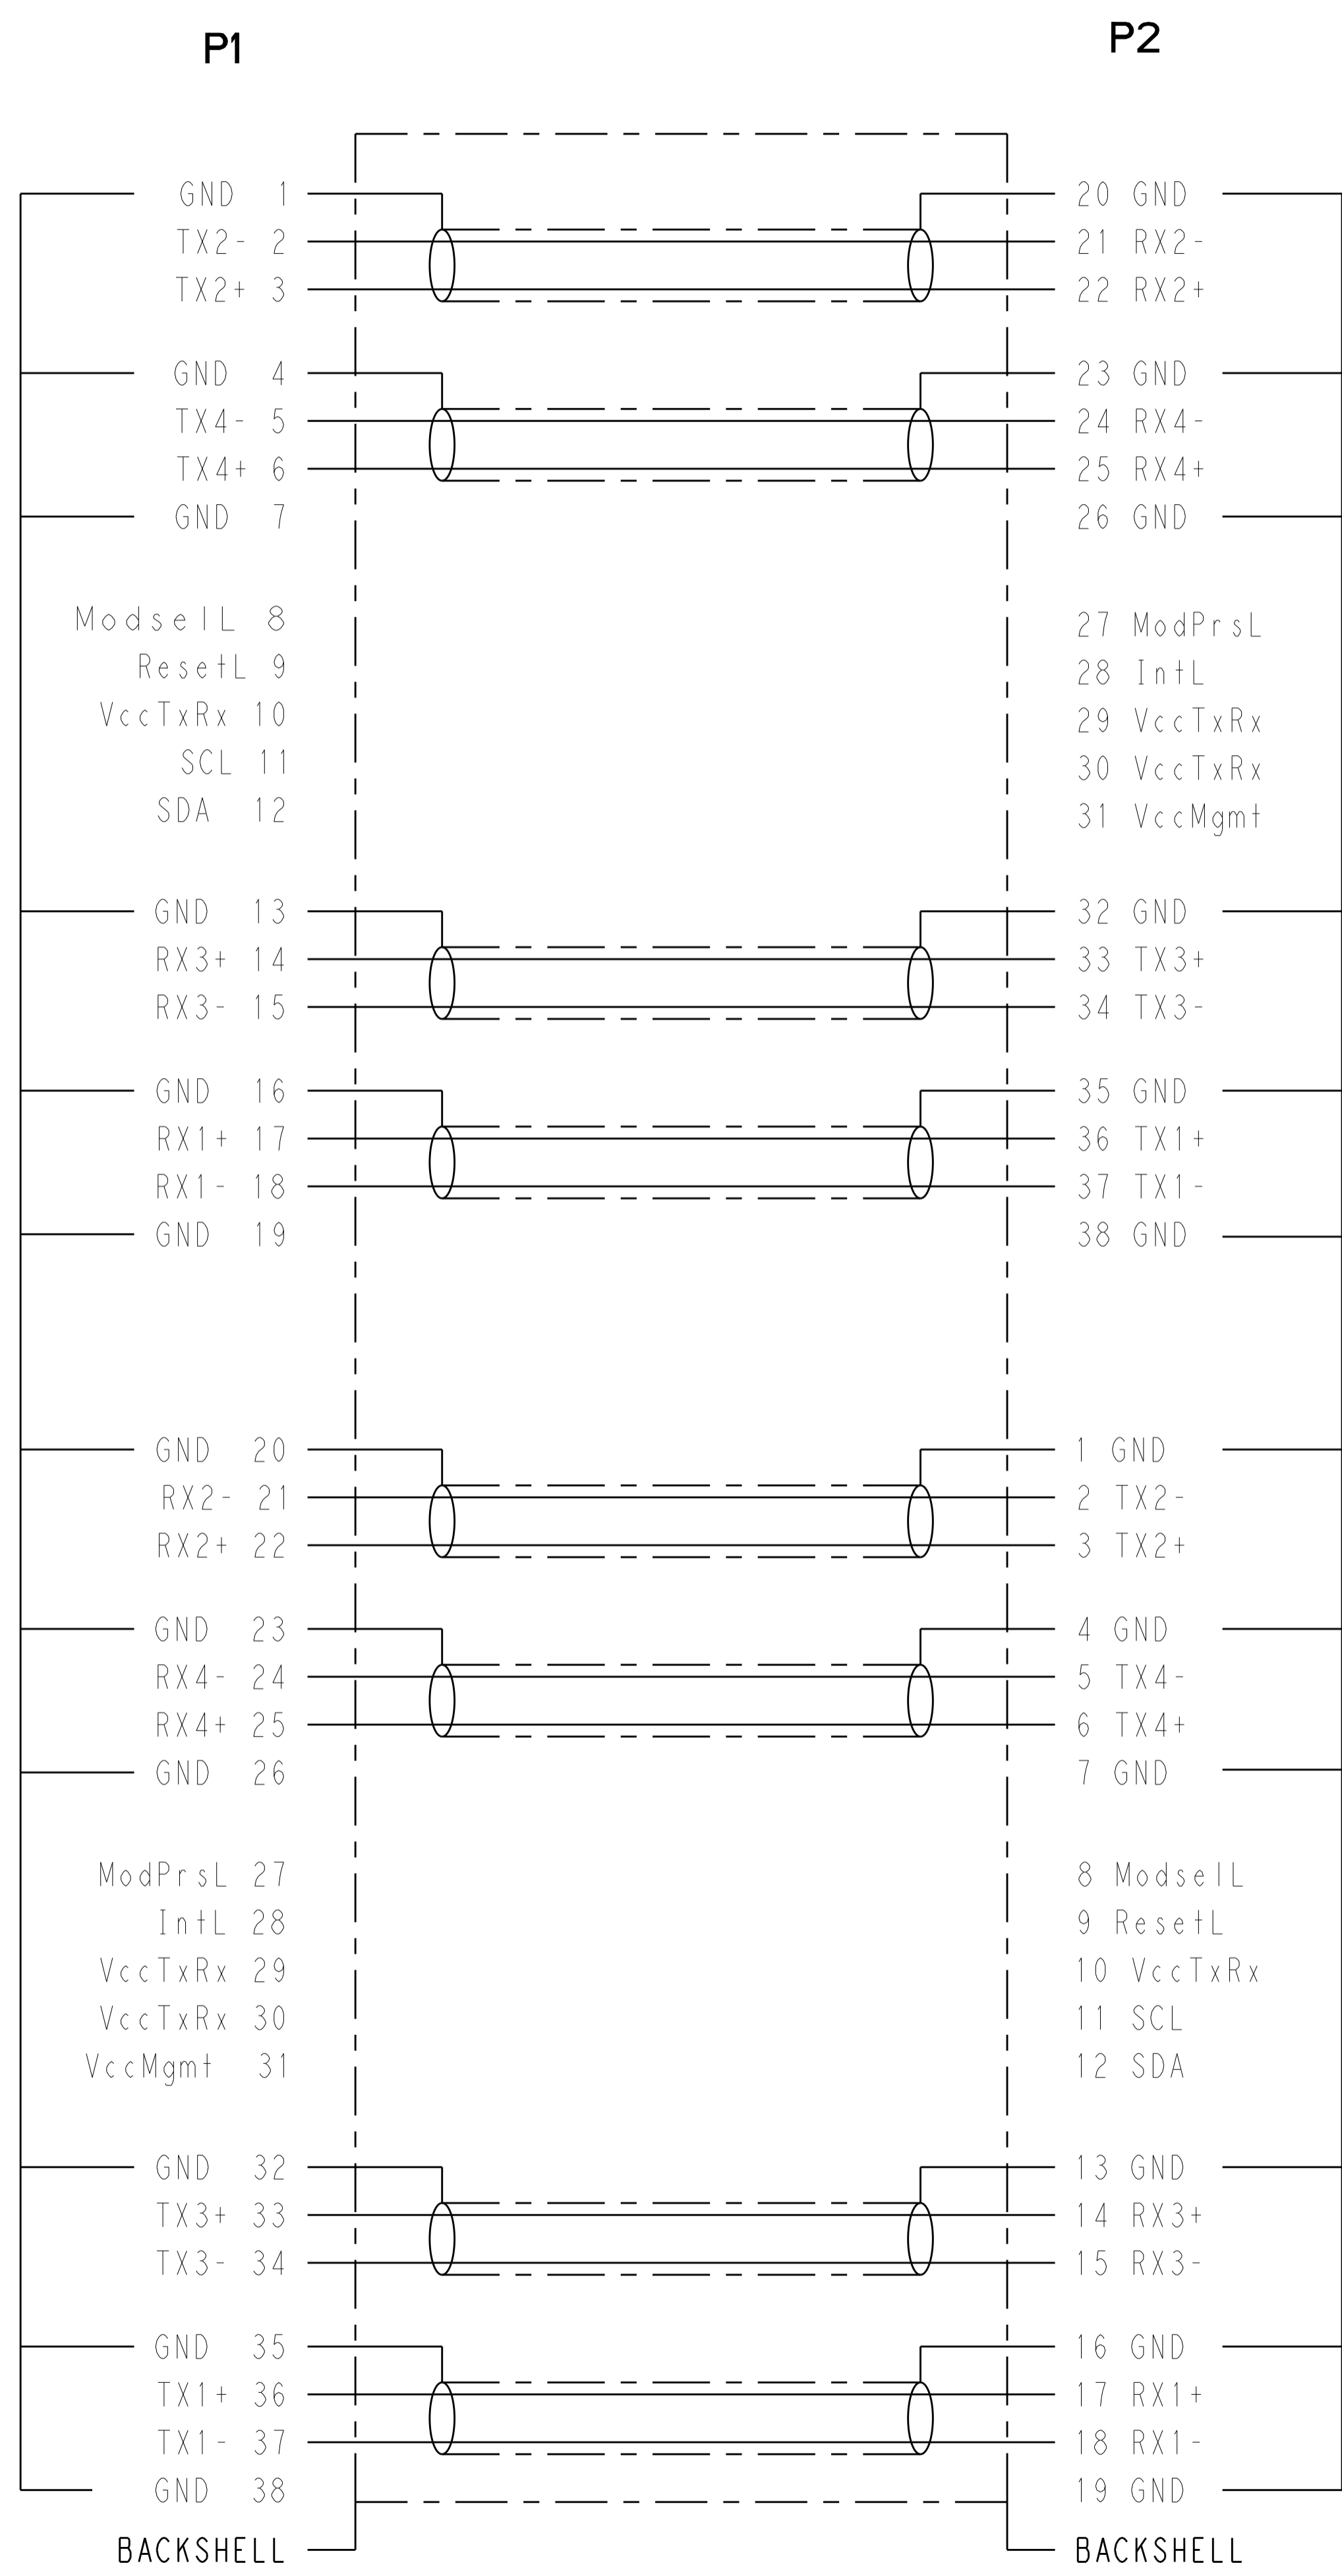

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. SMITH 11APR2016	TE Connectivity
DIMENSIONS: mm		CHK G. FRANKLIN 11APR2016	
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		APVD G. FRANKLIN 11APR2016	NAME CABLE ASSEMBLY MICRO QSFP TO MICRO QSFP 32 AWG
MATERIAL		PRODUCT SPEC	SIZE A1
FINISH		APPLICATION SPEC	CAGE CODE C=2821236
		WEIGHT	RESTRICTED TO
		CUSTOMER DRAWING	SCALE 1:2 SHEET 2 OF 2 REV 4