



REVISIONS				
P	LTN	DESCRIPTION	DATE	APVD
1		PRELIMINARY	11APR2016	TS GF
2		REV LABEL FORMAT	30AUG2016	TS GF
3		ADDED NOTE 6	07JUL2017	TS GF

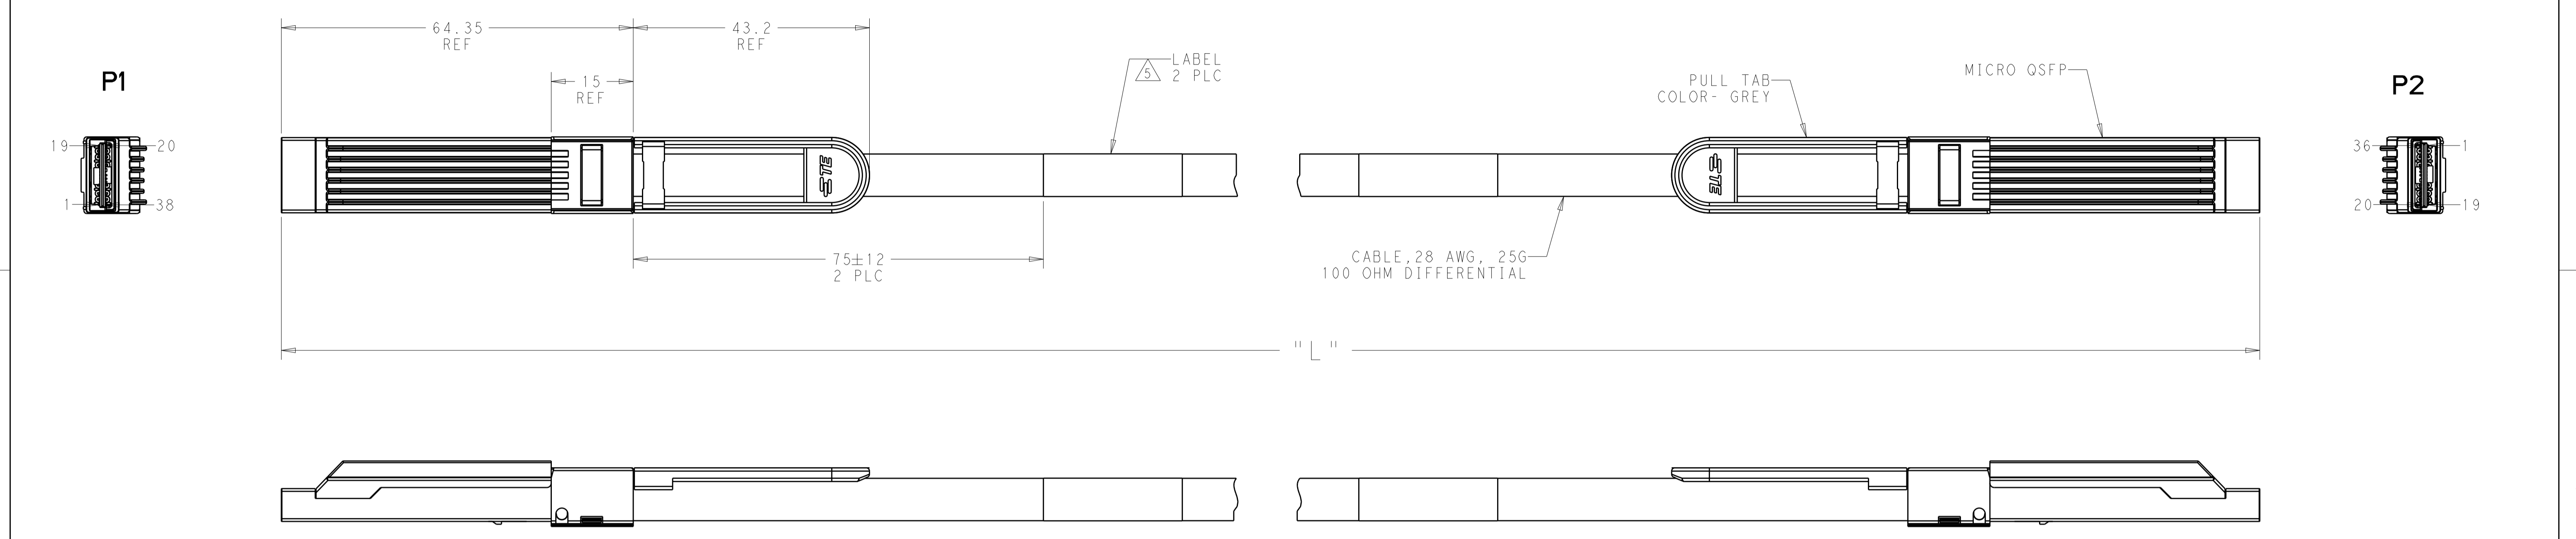

- CHARACTERISTIC IMPEDANCE: 100±10 OHMS (MEASURED DIFFERENTIALLY)
- CABLE ASSEMBLY TESTED FOR OPENS, SHORTS AND PROPER EEPROM PROGRAM.
- PRODUCT AND PROCESSING MEETS THE REQUIREMENTS OF TE STANDARD TEC-138-702.
- SEE SHEET 2 FOR WIRING SCHEMATIC.

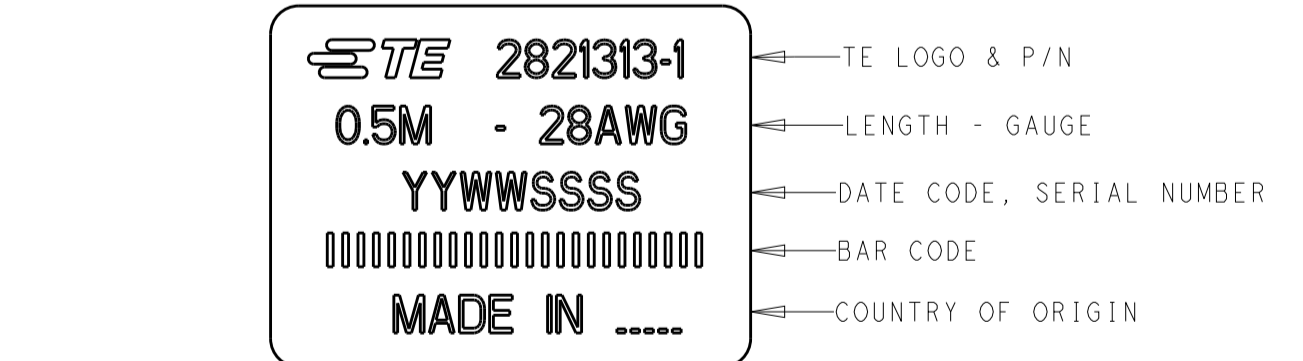

△ DUE TO SHORT CABLE LENGTH, THE PART NUMBERS INDICATED MAY NOT MEET IEEE802.3bj MINIMUM INSERTION LOSS LIMITS.


4000±40	28 AWG	2821313-5
3000±40	28 AWG	2821313-4
2000±40	28 AWG	2821313-3
1000±40	28 AWG	2821313-2
△ 500±25	28 AWG	2821313-1
L	WIRE GAGE	PART NO

THIS PRODUCT HAS NOT COMPLETED VALIDATION AND QUALIFICATION TESTING

PRELIMINARY NOT RELEASED FOR PRODUCTION

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN T. SMITH 11APR2016	STE TE Connectivity	
DIMENSIONS: mm		CHK G. FRANKLIN 11APR2016	NAME CABLE ASSEMBLY MICRO QSFP TO MICRO QSFP 28 AWG	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G. FRANKLIN 11APR2016	RESTRICTED TO	
0 PLC ±	1 PLC ±	PRODUCT SPEC	SIZE A1	
2 PLC ±	3 PLC ±	APPLICATION SPEC	CAGE CODE DRAWING NO	
4 PLC ±	ANGLES ±	WEIGHT	SCALE 7:4 SHEET 1 OF 2 REV 3	
MATERIAL	FINISH	CUSTOMER DRAWING	C=2821313	

REVISIONS				
P.	LTN.	DESCRIPTION	DATE	APVD.
		SEE SHEET 1		

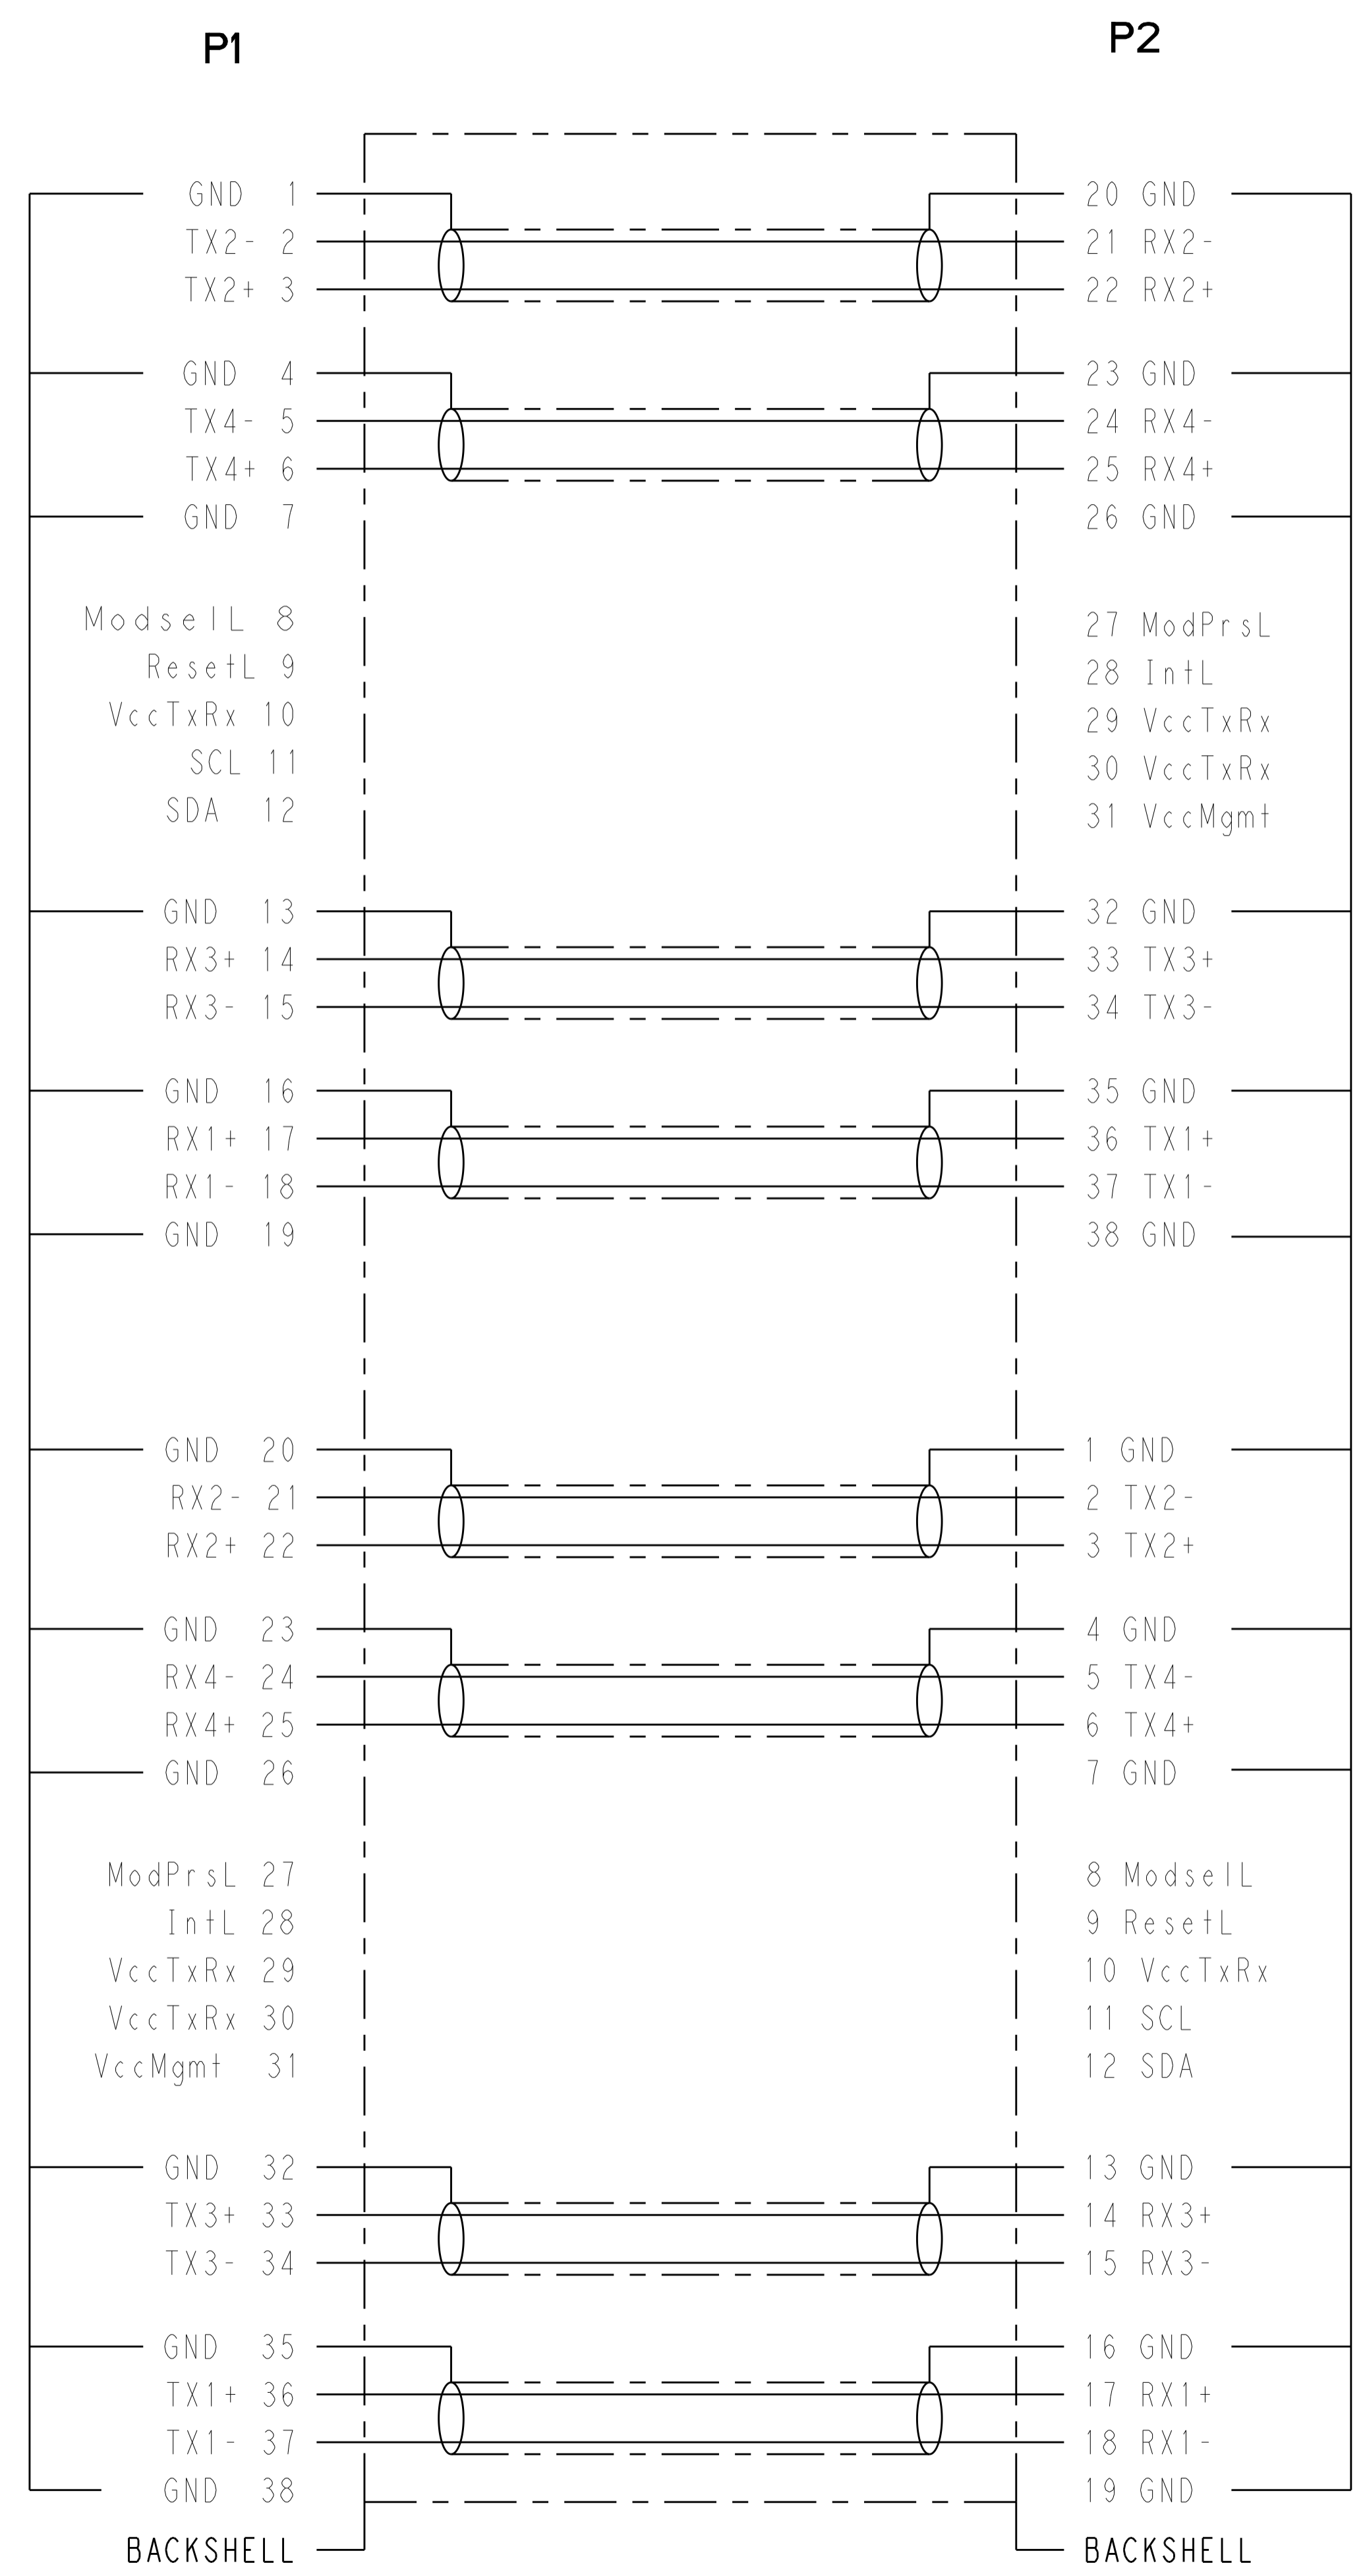

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. SMITH 11APR2016 CHK G. FRANKLIN 11APR2016 APVD G. FRANKLIN 11APR2016	STE TE Connectivity	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		NAME: CABLE ASSEMBLY MICRO QSFP TO MICRO QSFP 28 AWG
MATERIAL: - FINISH: -		WEIGHT: - CUSTOMER DRAWING	SIZE: A1 CAGE CODE: - DRAWING NO: C=2821313	RESTRICTED TO: - SCALE: 1:2 SHEET: 2 OF 2 REV: 3