
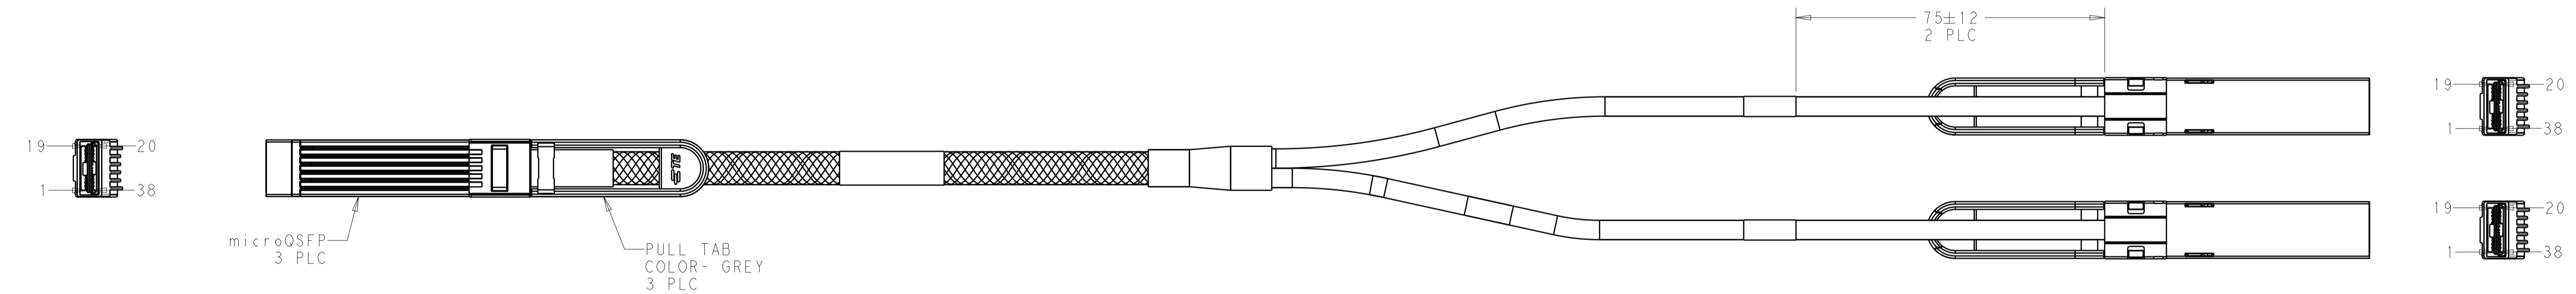
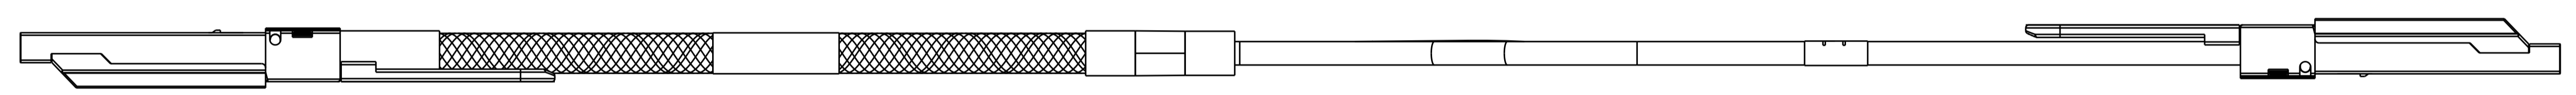


REVISIONS				
P	LTN	DESCRIPTION	DATE	APVD
1		PRELIMINARY	19APR2016	TS GF
2		ADD NOTE 6	09DEC2016	TS GF

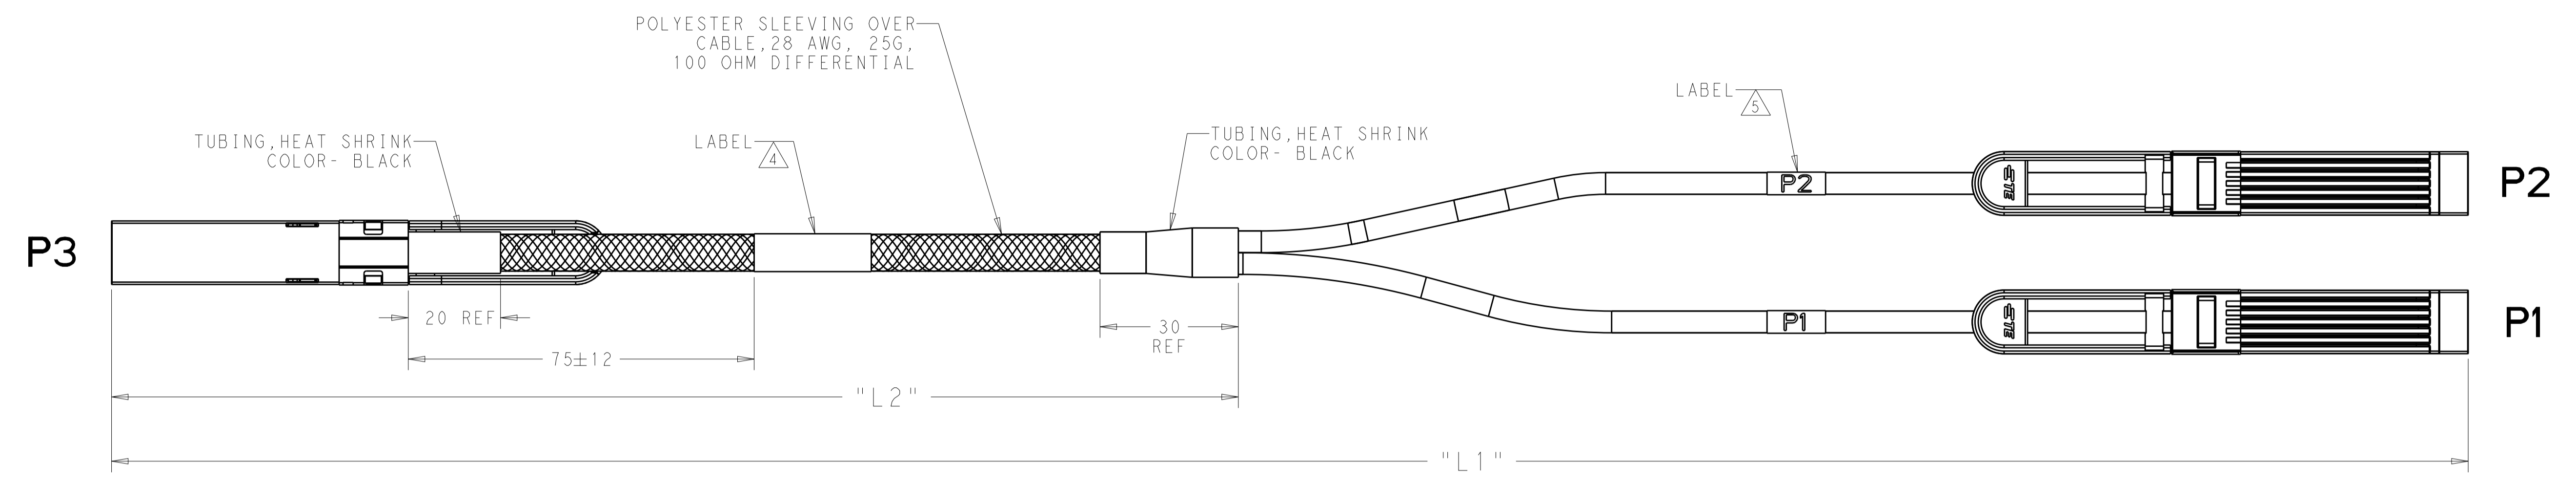


THIS PRODUCT HAS NOT COMPLETED VALIDATION AND QUALIFICATION TESTING

PRELIMINARY NOT RELEASED FOR PRODUCTION

1500±25	4000±40	28 AWG	2821785-5
1000±25	3000±40	28 AWG	2821785-4
700±25	2000±40	28 AWG	2821785-3
330±25	1000±40	28 AWG	2821785-2
—	500±25	28 AWG	2821785-1 <sup>6</sup>
L2	L1	WIRE GAGE	PART NO


THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN T. SMITH 21JUL2016	TE Connectivity	
DIMENSIONS: mm		CHK G. FRANKLIN 21JUL2016	NAME CABLE ASSEMBLY, microQSFP TO (2) microQSFP 28 AWG	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G. FRANKLIN 21JUL2016	PRODUCT SPEC	
0 PLC ±		APPLICATION SPEC		
1 PLC ±		SIZE A1		
2 PLC ±		CAGE CODE -		
3 PLC ±		DRAWING NO C=2821785		
4 PLC ±		RESTRICTED TO		
ANGLES ±		WEIGHT -		
FINISH -		CUSTOMER DRAWING		
MATERIAL -		SCALE 5:4 SHEET 1 OF 2 REV 2		

REVISIONS				
P	LTN	DESCRIPTION	DATE	APVD
		SEE SHEET 1		

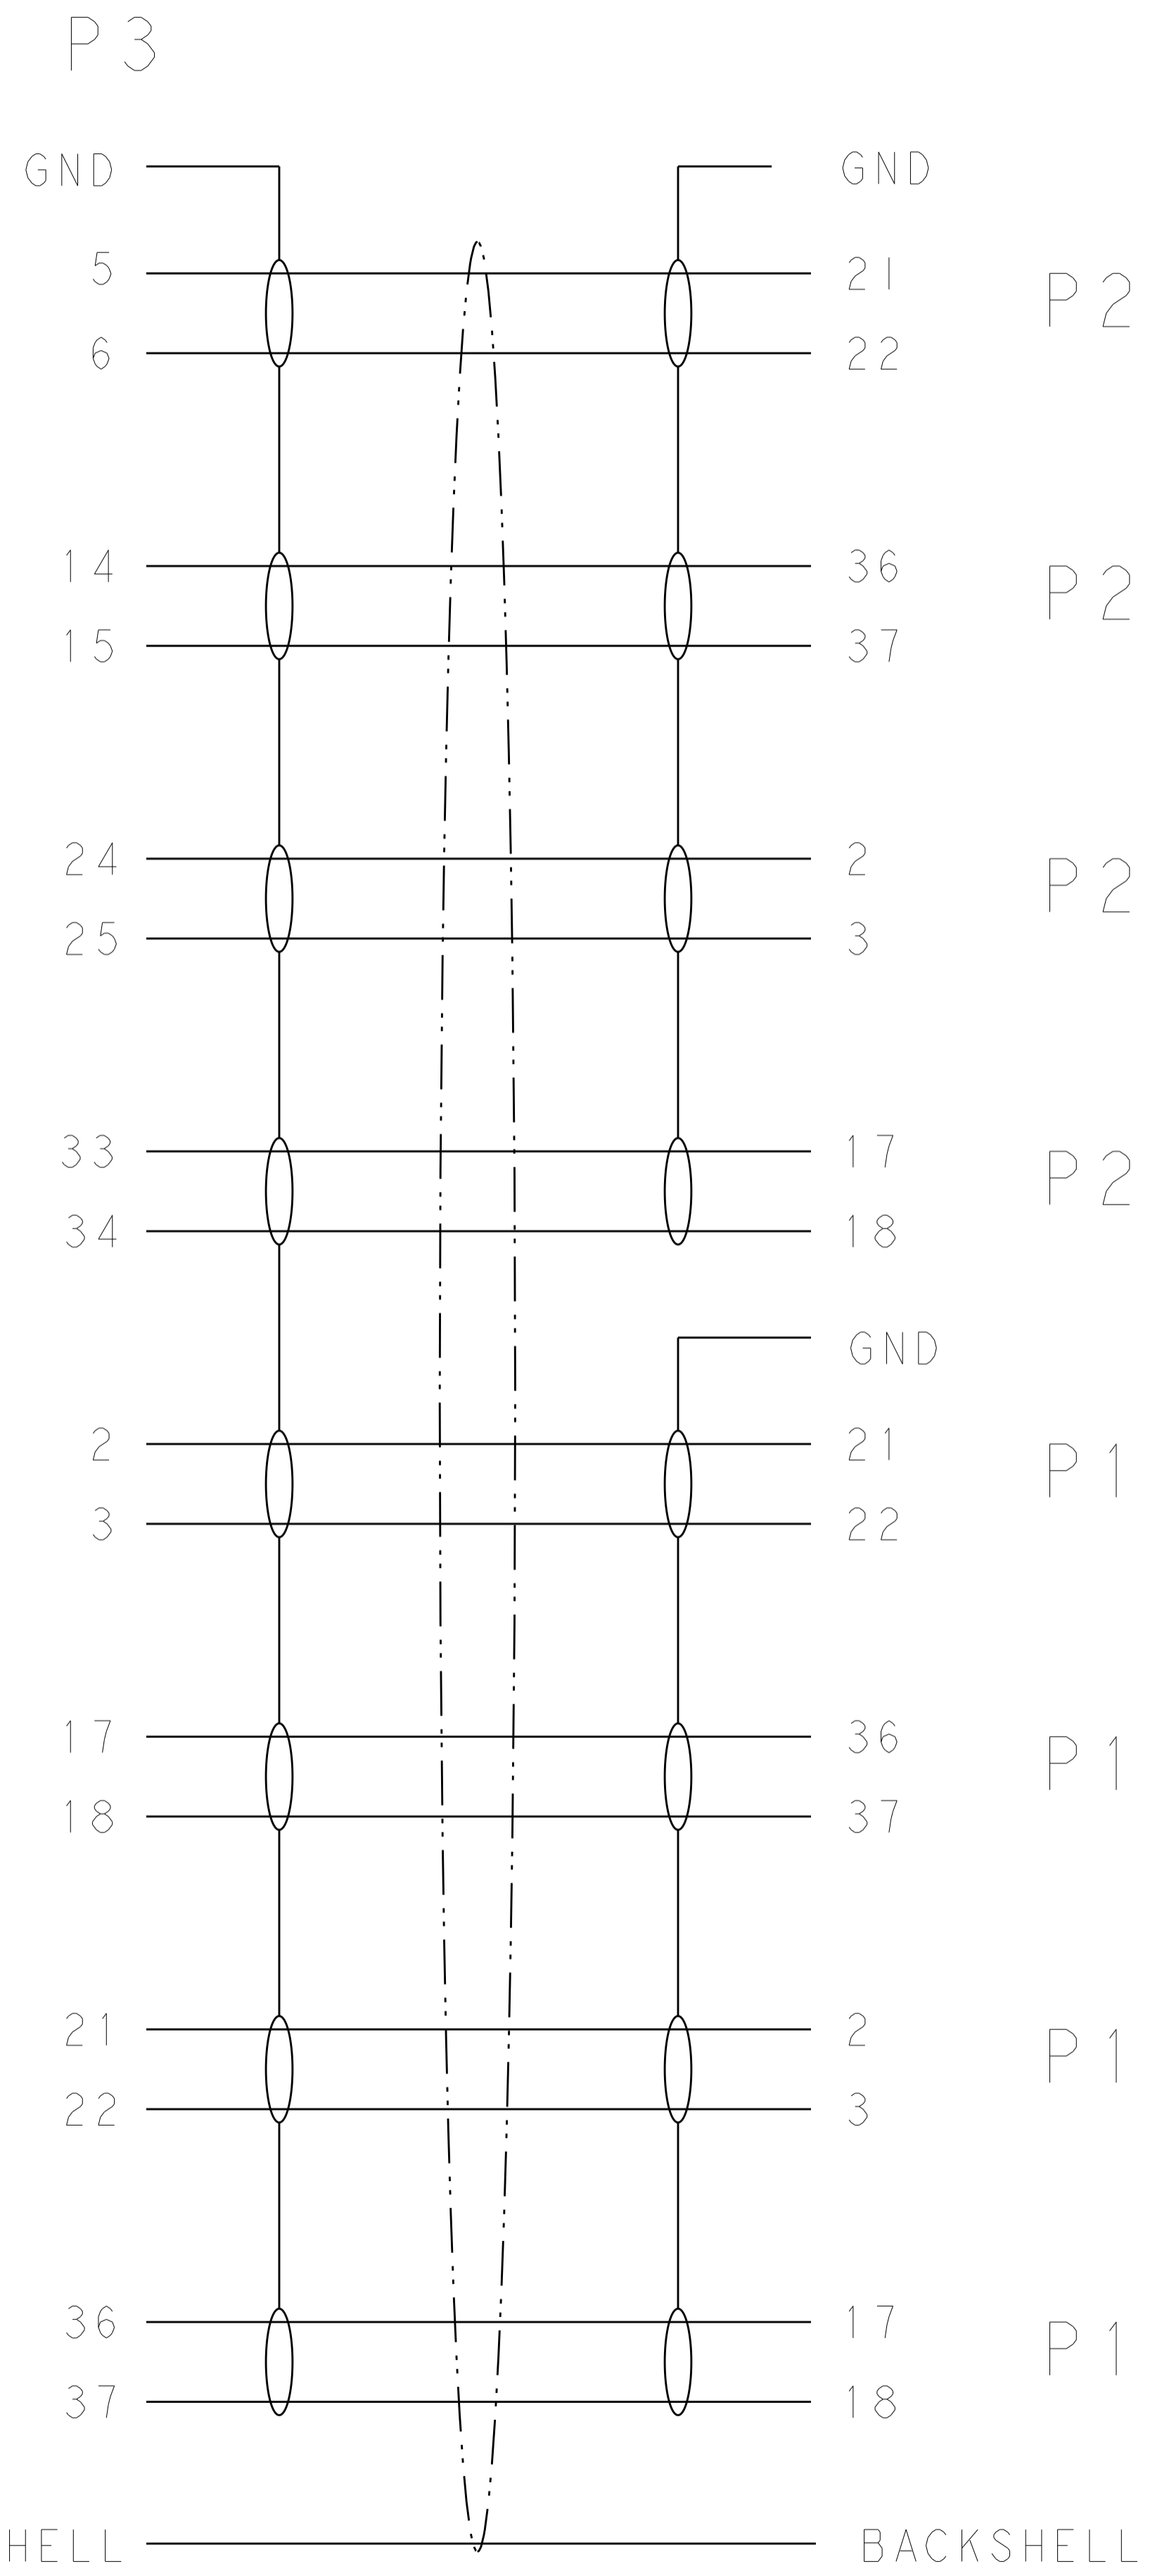

- CHARACTERISTIC IMPEDANCE: 100±10 OHMS (MEASURED DIFFERENTIALLY)
- CABLE ASSEMBLY TESTED FOR OPENS, SHORTS AND PROPER EEPROM PROGRAM.
- PRODUCT AND PROCESSING MEETS THE REQUIREMENTS OF TE STANDARD TEC-138-702.

△ LABEL INFORMATION: -1 SHOWN

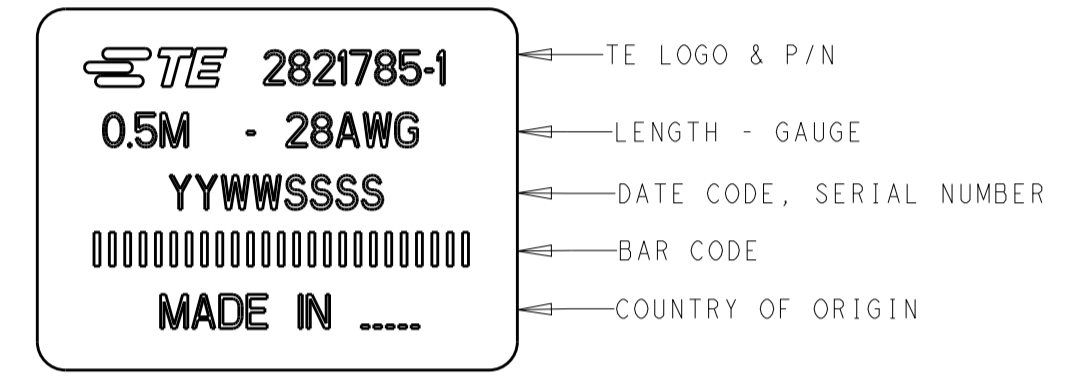

△ LABEL INFORMATION:  
 [P] ← APPROPRIATE "P" NUMBER

△ DUE TO SHORT CABLE LENGTH, THE PART NUMBERS INDICATED MAY NOT MEET IEEE802.3bJ MINIMUM INSERTION LOSS LIMITS.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: T. SMITH 21JUL2016 CHK: G. FRANKLIN 21JUL2016 APVD: G. FRANKLIN 21JUL2016		
DIMENSIONS: mm TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES FINISH ±		NAME: CABLE ASSEMBLY, microSFP TO (2) microSFP 28 AWG PRODUCT SPEC: APPLICATION SPEC:	SIZE: A1 CAGE CODE: - DRAWING NO: ©=2821785	RESTRICTED TO: - SCALE: 1:2 SHEET: 2 OF 2 REV: 2
MATERIAL: -		CUSTOMER DRAWING		