



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
U6		REVISED PER ECR-21-117185	25OCT2021	PJ	VS

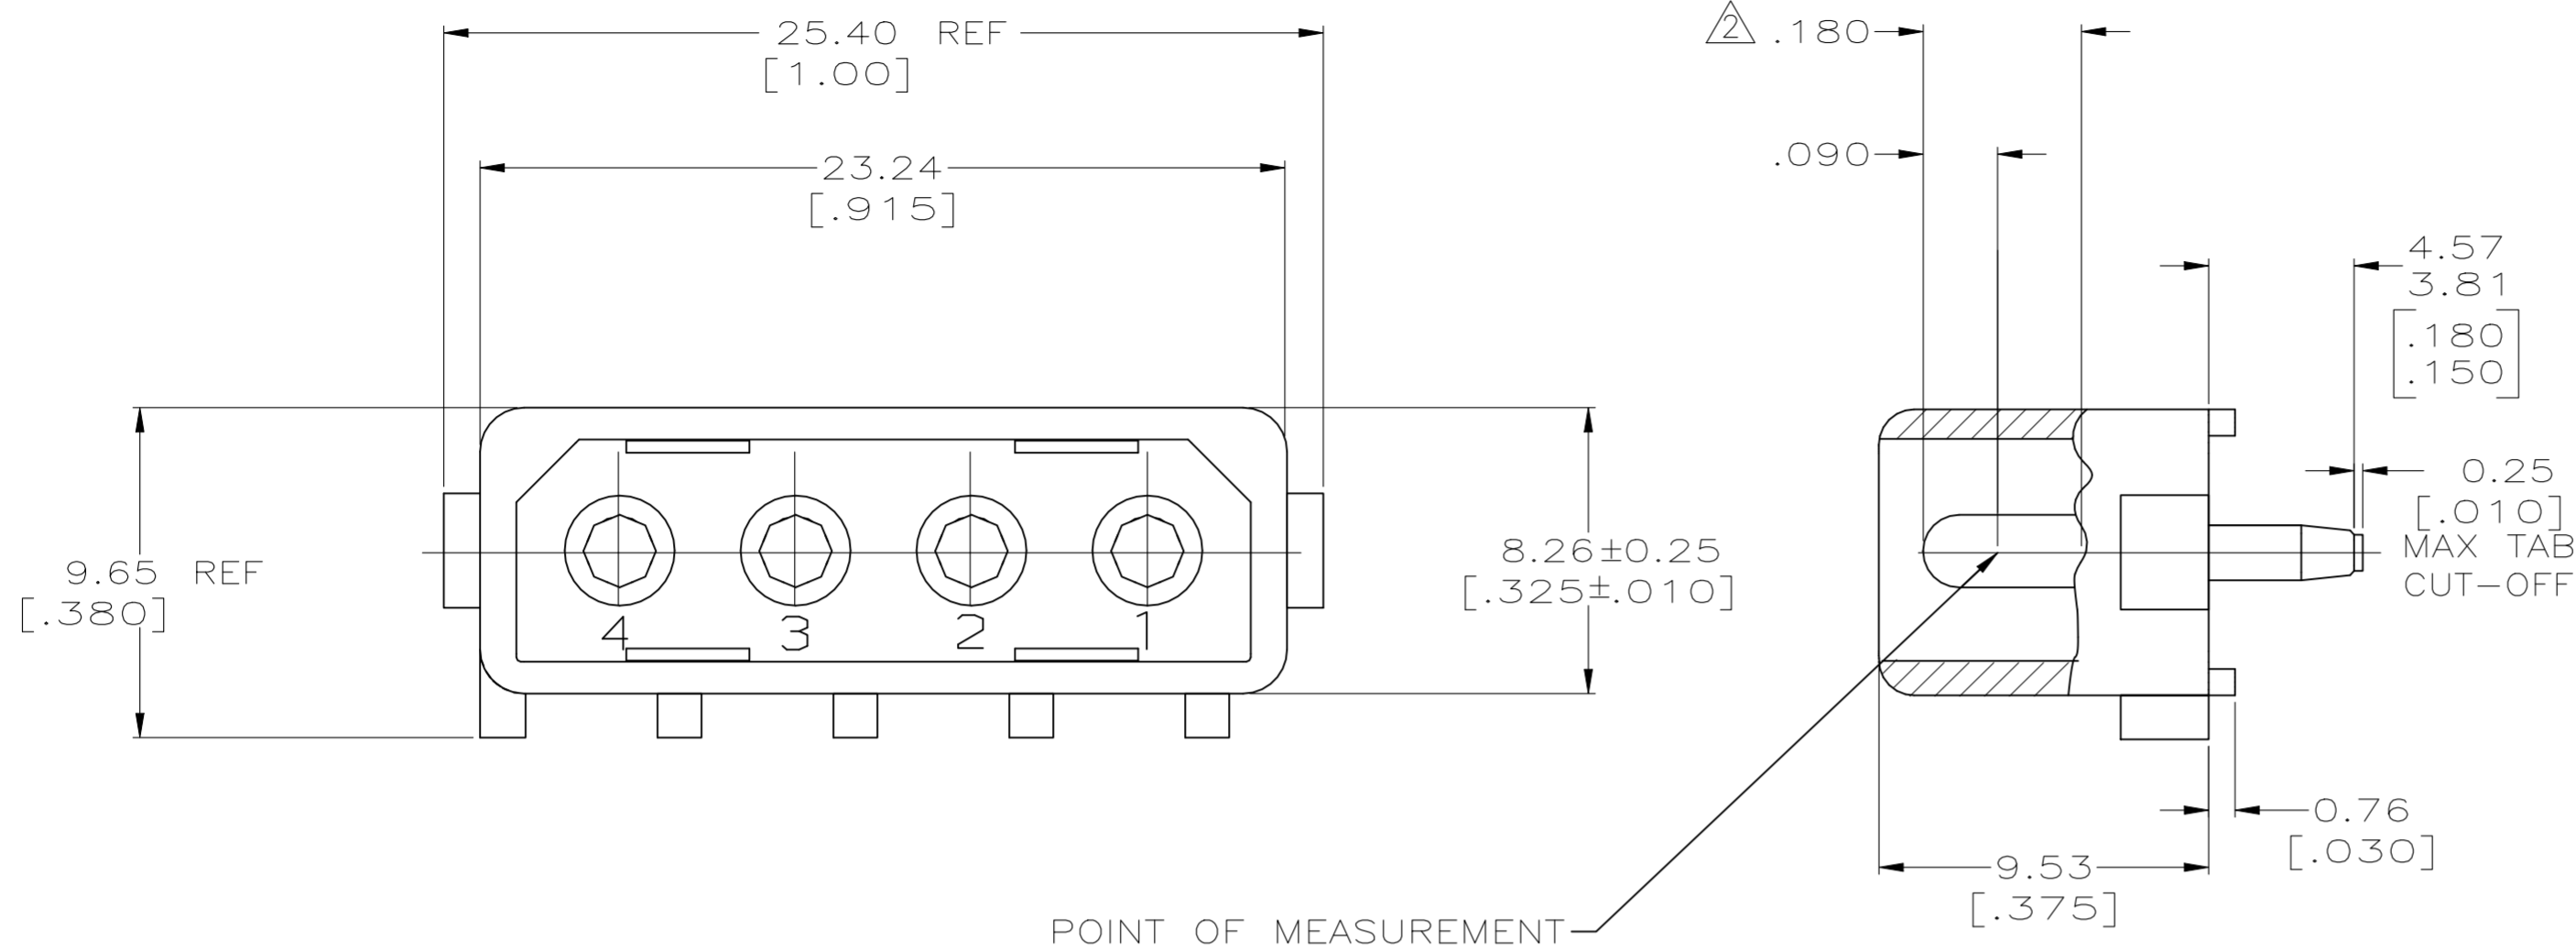

- PARTS MUST COMPLY WITH TE SOLDERABILITY SPECIFICATION 109-11-3.
- CONTACT IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND TIN PLATED ON SOLDERTAIL END.
- DIMENSIONS IN BRACKETS ARE IN INCHES.
- DIMENSION SHOWN REPRESENT PRODUCT IN DRY CONDITION. ADDITIONAL 2% GROWTH DUE TO END USE LOCATION MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.

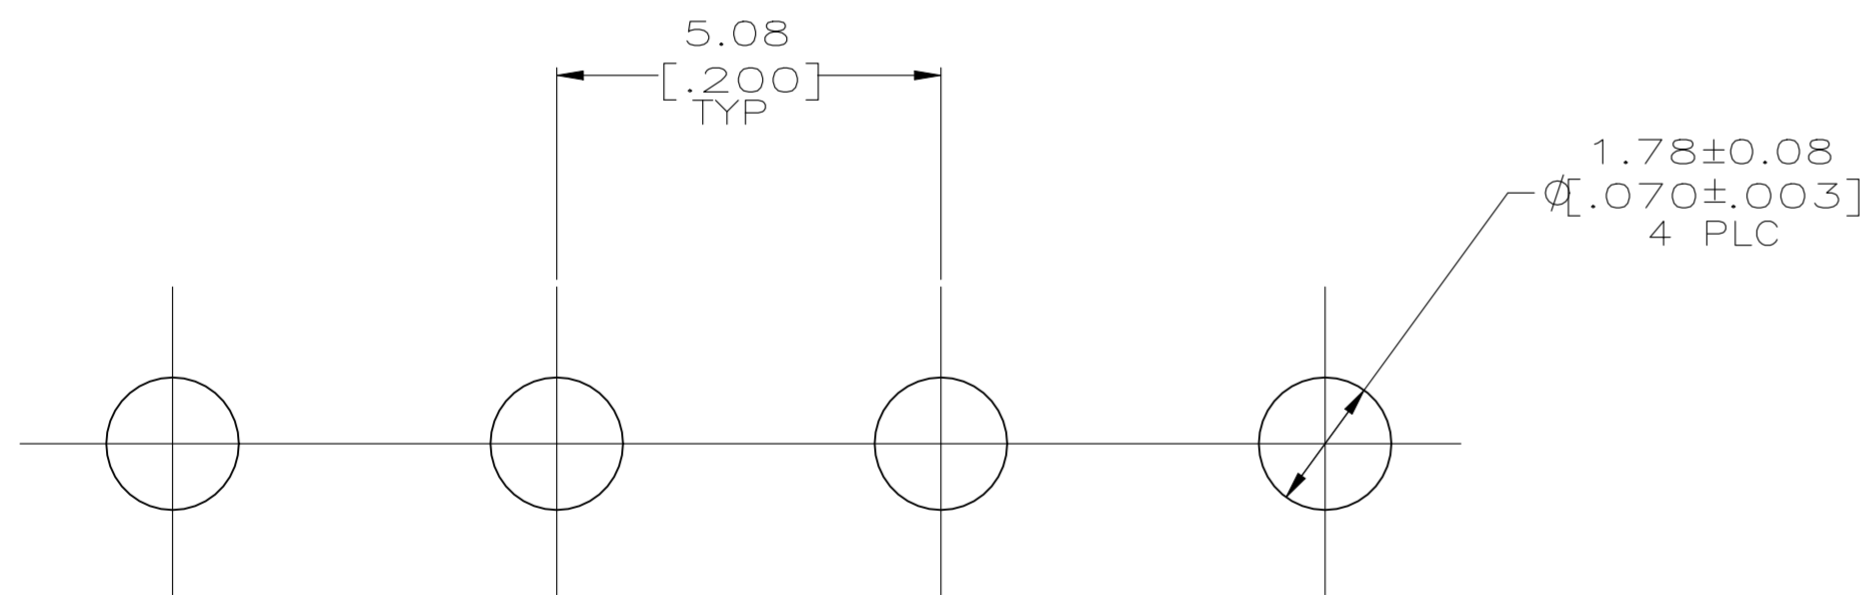

OBSOLETE	PHOS BRZ, TIN LEAD	NYLON,UL94V-2	-350211-3-
SUPERSEDED BY 1586515-2		NYLON,UL94V-2	350211-2-
	PHOS BRZ, PRE-TIN	NYLON,UL94V-2	350211-1
PIN CONTACT MATERIAL & FINISH		HOUSING MATERIAL & COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 27MAY2005 K. WHITAKER	TE Connectivity	
		CHK 27MAY2005 D. COLEY		
		APVD 27MAY2005 D. COLEY	NAME	
DIMENSIONS: mm [INCHES]		PRODUCT SPEC		SIZE CAGE CODE DRAWING NO A2 00779 C=350211
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC		
MATERIAL SEE TABLE		FINISH SEE TABLE		RESTRICTED TO
		WEIGHT 0.000000		SCALE 5:1 SHEET 1 OF 1 REV U6
		CUSTOMER DRAWING		