

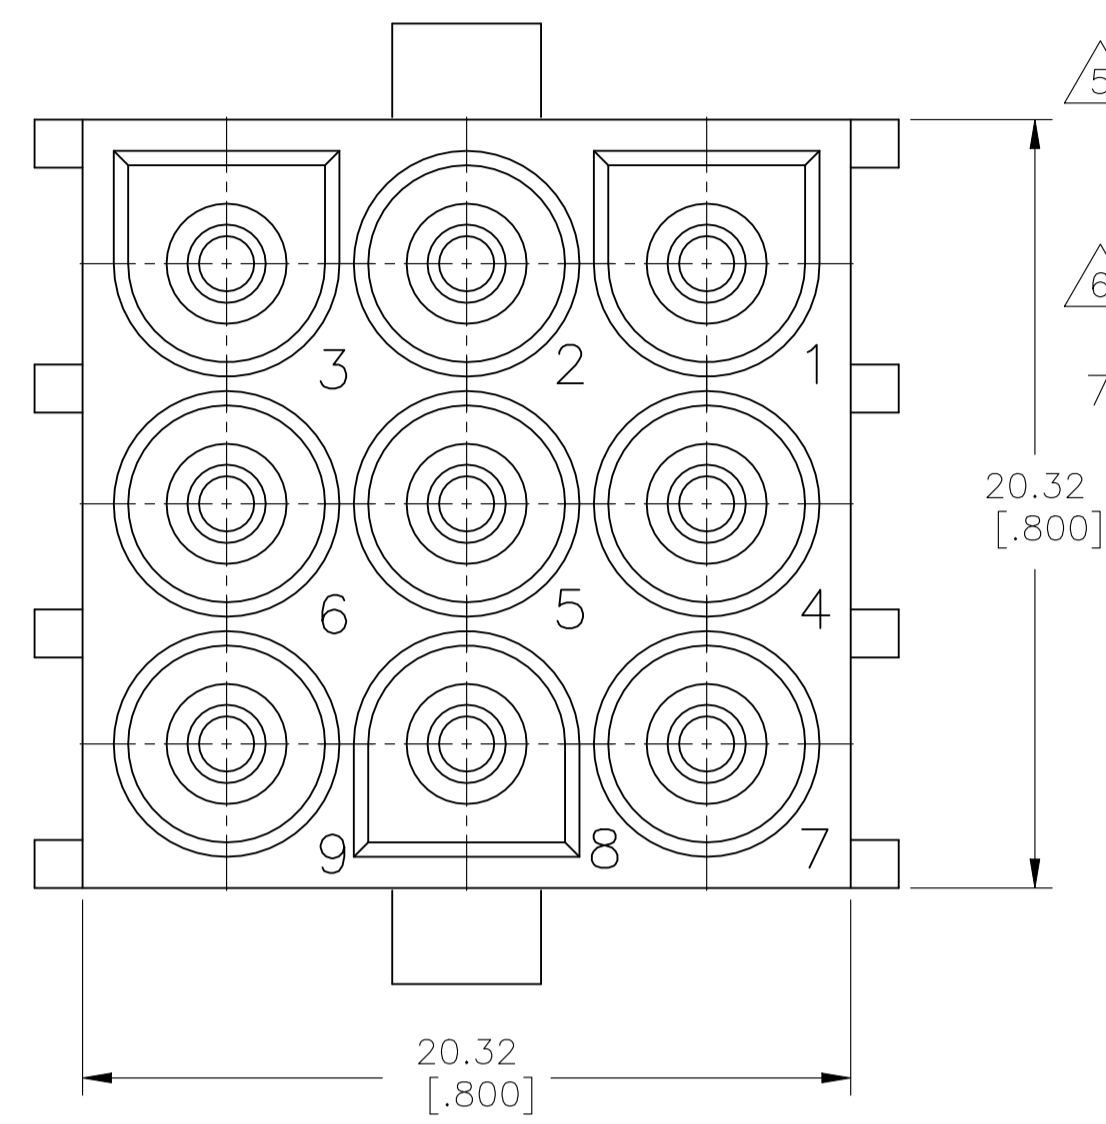
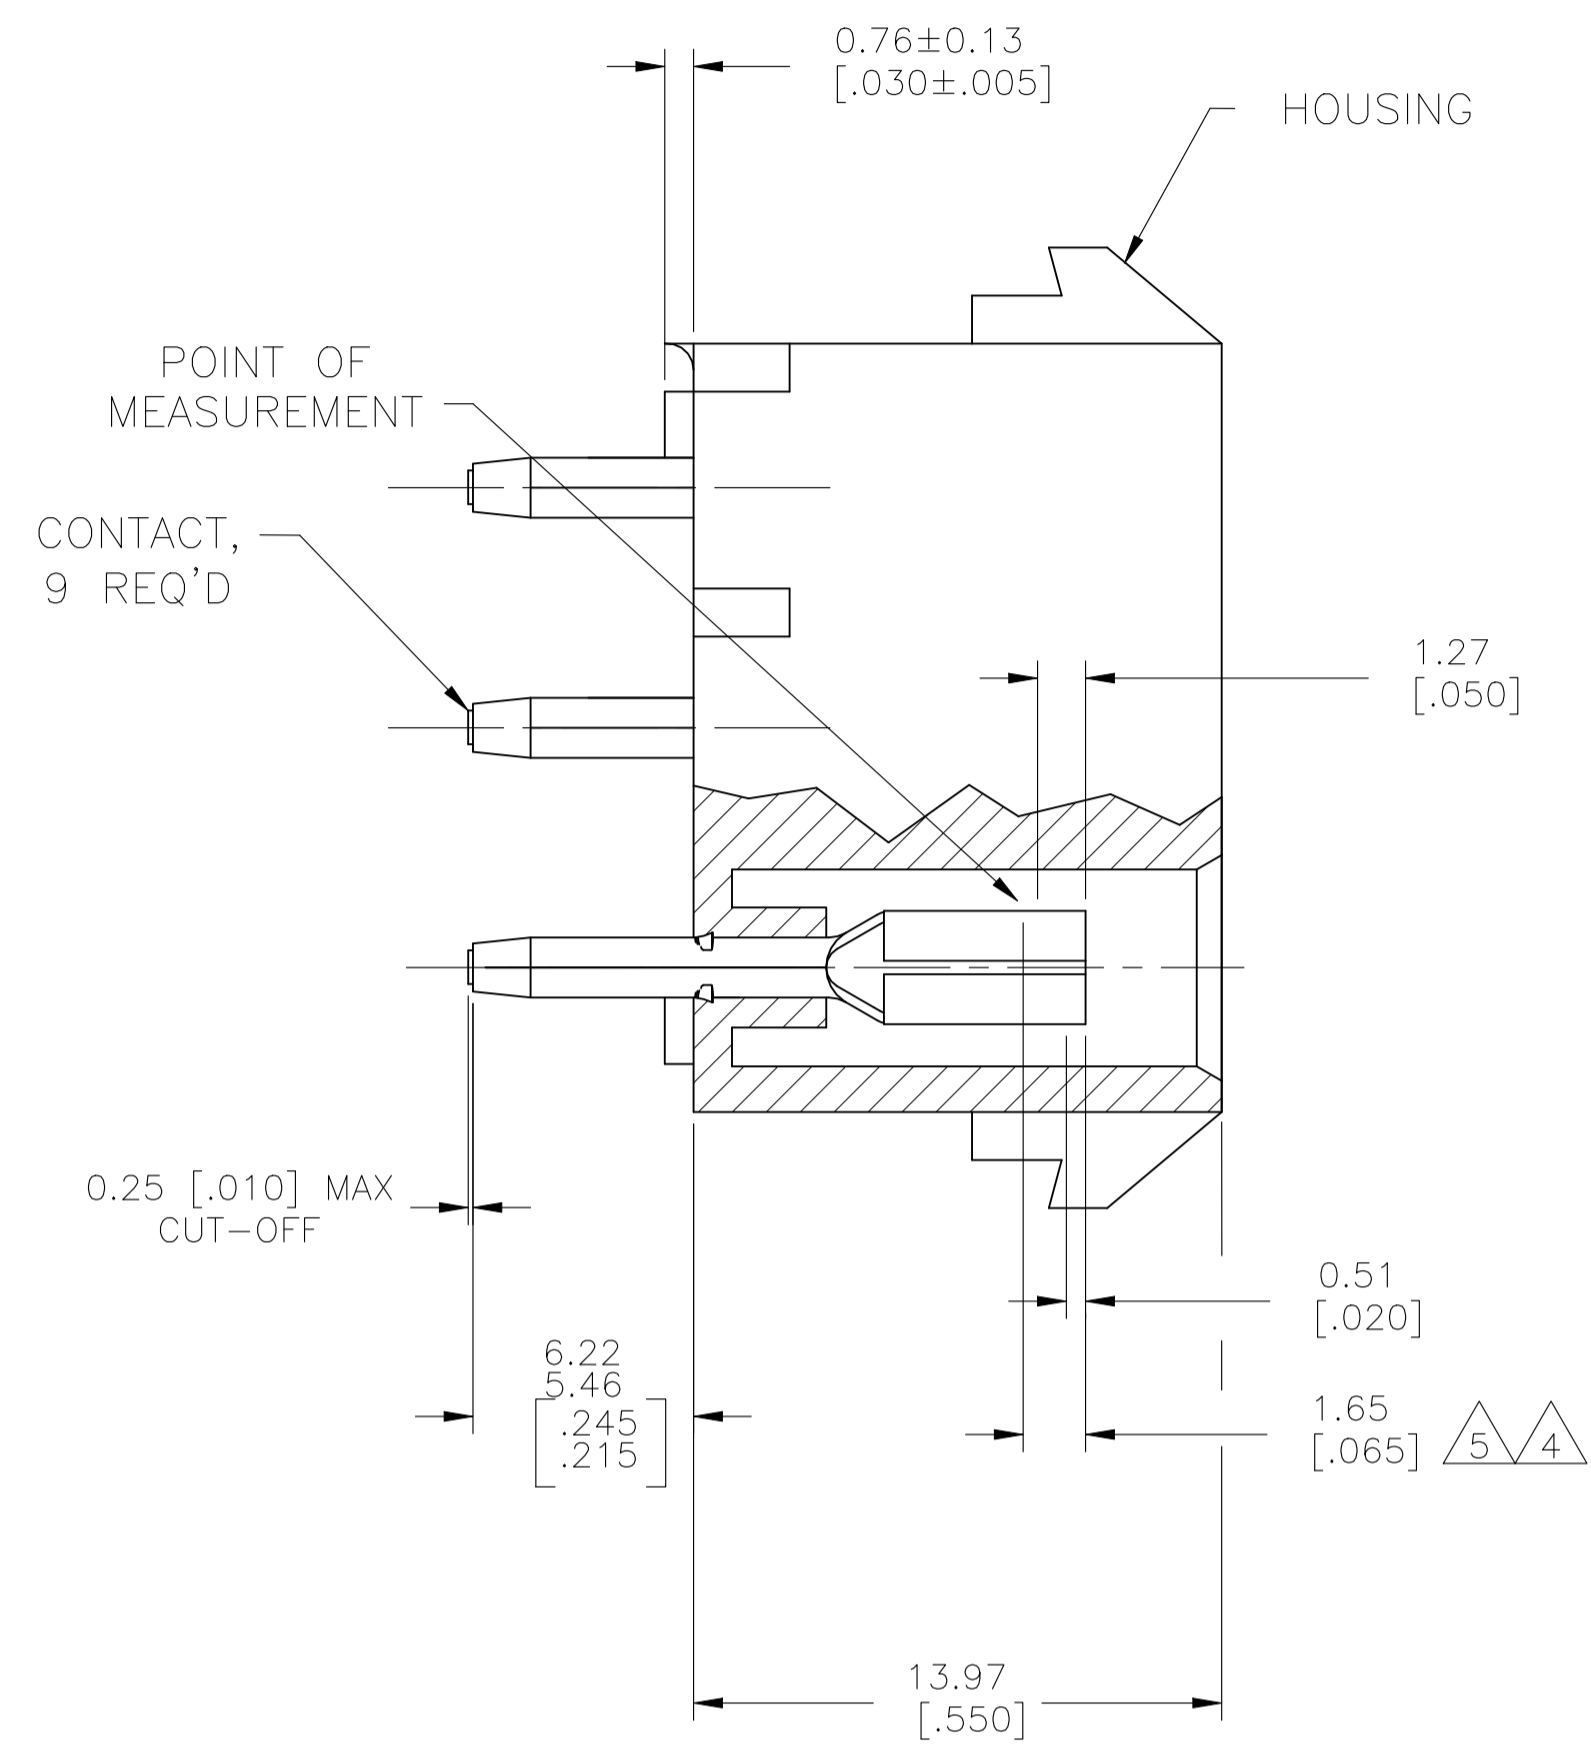


REVISIONS					
REV	DESCRIPTION	DATE	BY	CHK	APP'D
G3	REVISED PER ECR-21-118222	22JUL2022	AVN	VS	

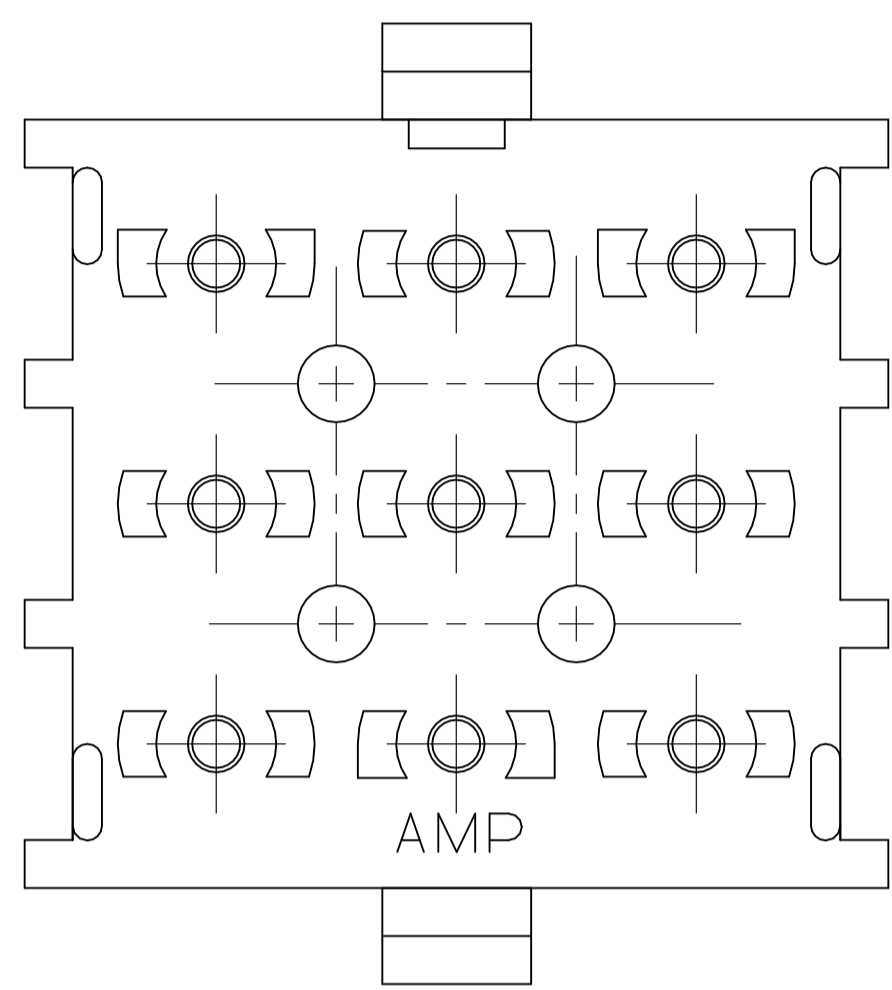

- 1 MATES WITH AMP CONNECTOR PART NO. 480706.
- 2 FLAME RETARDANT CLASSIFICATION OF MATERIAL IS 94V-2.
- 3 PARTS MUST COMPLY WITH AMP SOLDERABILITY SPEC 109-11-3.
- 4 CONTACT IS STAMPED FROM PRE-PLATED STOCK WHICH IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN STRIPED WITH 0.00076 [.000030] GOLD IN CONTACT AREA INDICATED AND TIN-LEAD ON SOLDER TAIL END.
- 5 CONTACT IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.
- 6 SUPERSEDED BY 350990-5
- 7 DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY CONDITION. ADDITIONAL 2% GROWTH DUE TO END USE LOCATION MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.

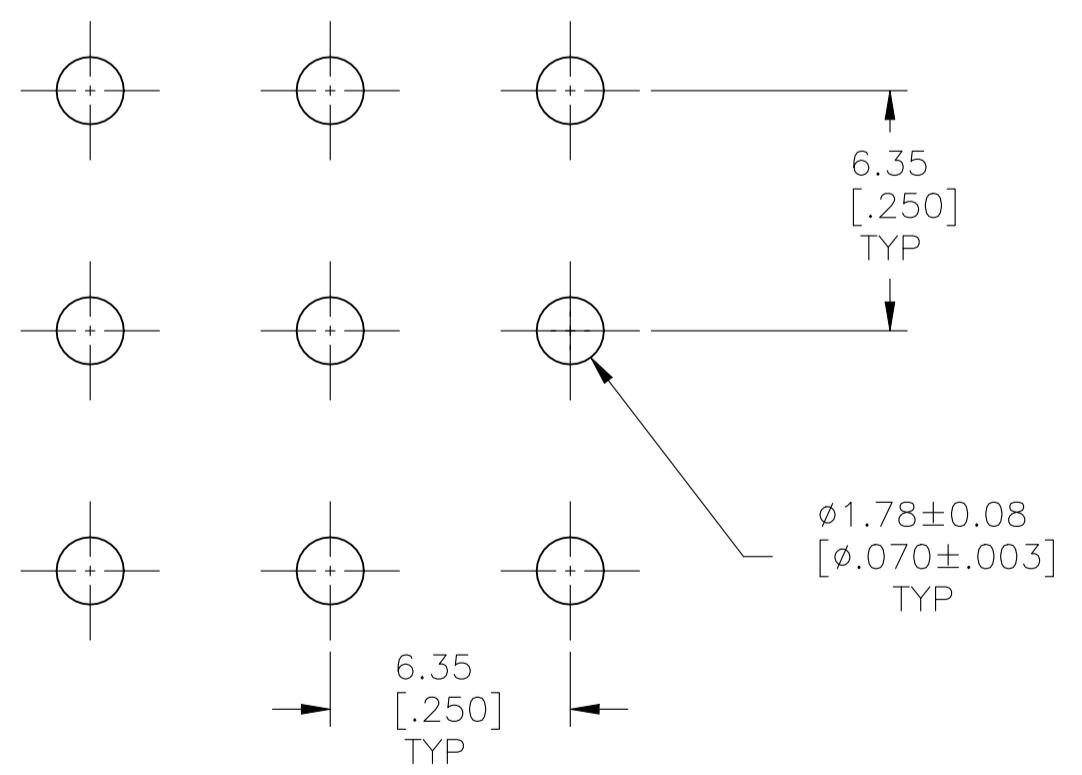

RECOMMENDED LAYOUT FOR 3.18 [.125] THICK PC BOARD

PH BRZ GOLD 5	NYLON, NATURAL 2	350990-5
PH BRZ TIN	NYLON, NATURAL 2	350990-4
6 PH BRZ GOLD 4	NYLON, NATURAL 2	350990-3
CONTACT	HOUSING	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN K. WHITAKER 11OCT2005	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK S. RIDGILL 11OCT2005		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APP'D S. RIDGILL 11OCT2005	NAME	
0. PLC ±		PRODUCT SPEC		
1. PLC ±		APPLICATION SPEC		
2. PLC ±		SIZE		
3. PLC ± 0.13 [.005]		WEIGHT		
4. PLC ±		CUSTOMER DRAWING		
ANGLES ±		SCALE 5:1 SHEET 1 OF 1 REV G3		
FINISH SEE TABLE		DRAWING NO. A1 00779 C=350990		