

POSITIONING THE SECONDARY LOCK

POSITIONING THE SECONDARY LOCK

Housing, 10 Posn, Jr P Timer, Tab – Drawing number 493571

This connector is supplied to the customer with **SECONDARY LOCK** in pre-assembled position shown in Detail “A”.



DETAIL “A” Supplied with a pre-assembled Secondary lock.


During shipping and handling, the Secondary Lock may be displaced to its locked position as shown in Detail “B”.

This can prevent proper contact insertion. The connector can be returned to proper function by retracting the secondary Lock to position shown in Detail “A” above, using the following procedure:



DETAIL “B” Locked position of Sec lock.

Insert a small screwdriver, or a similar tool and push as shown in Detail “C” gently until it locks into pre-lock position (Detail A).

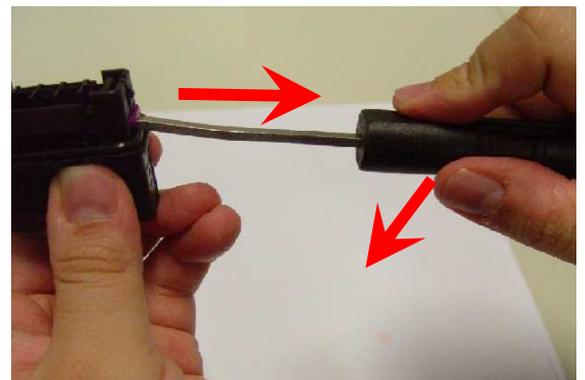

DETAIL “C”

Revision Record					
Rev.	Date	Description	Edited	Checked	Approved
A	11-Nov-2013	Release	Sandro Oliveira	Marcos Ogawa	Djalma Oliveira